


# Metric Synchronous Belts

## POLYURETHANE WITH STEEL CORDS\*

### AT PROFILE

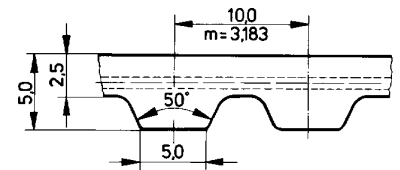

#### T3 AT (3 mm Pitch)

Type	Belt Length (mm)	No. Teeth
3A150	150	50
3A201	201	67
3A252	252	84
3A267	267	89
3A270	270	90
3A300	300	100
3A351	351	117
3A399	399	133
3A417	417	139
3A450	450	150
3A501	501	167
3A549	549	183
3A600	600	200
3A639	639	213
3A900	900	300
3A1011	1011	337

#### T5 AT (5 mm Pitch)

Type	Belt Length (mm)	No. Teeth
5A225	225	45
5A255	255	51
5A260	260	52
5A280	280	56
5A300	300	60
5A330	330	66
5A340	340	68
5A375	375	75
5A390	390	78
5A420	420	84
5A450	450	90
5A455	455	91
5A480	480	96
5A500	500	100
5A525	525	105
5A545	545	109
5A600	600	120
5A610	610	122
5A620	620	124
5A630	630	126
5A660	660	132
5A710	710	142
5A720	720	144
5A750	750	150
5A780	780	156
5A825	825	165
5A860	860	172
5A975	975	195
5A1050	1050	210
5A1125	1125	225
5A1500	1500	300
5A1750	1750	350
5A2000	2000	400

#### T10 AT (10 mm Pitch)

Type	Belt Length (mm)	No. Teeth
10A500	500	50
10A560	560	56
10A580	580	58
10A600	600	60
10A610	610	61
10A660	660	66
10A700	700	70
10A730	730	73
10A780	780	78
10A800	800	80
10A840	840	84
10A880	880	88
10A890	890	89
10A920	920	92
10A960	960	96
10A980	980	98
10A1000	1000	100
10A1010	1010	101
10A1050	1050	105
10A1080	1080	108
10A1100	1100	110
10A1150	1150	115
10A1200	1200	120
10A1210	1210	121
10A1250	1250	125
10A1280	1280	128
10A1300	1300	130
10A1320	1320	132
10A1350	1350	135
10A1360	1360	136
10A1400	1400	140
10A1420	1420	142
10A1480	1480	148
10A1500	1500	150
10A1600	1600	160
10A1700	1700	170
10A1720	1720	172
10A1800	1800	180
10A1860	1860	186
10A1940	1940	194

Standard Belt Width (mm)	6	7	8	10	11	12	14	16	20	25	32	50	60	75	100
--------------------------	---	---	---	----	----	----	----	----	----	----	----	----	----	----	-----

Ordering Example:

5A225.6  
 5A----- Pitch  
 225----- Length (mm)  
 6----- Width (mm)

\*Kevlar material available upon request.

Note: Very narrow belts, such as 4 mm or 6 mm, have a reduced number of steel cords and are only suitable for light loads. Special wire configurations for narrow widths are available by special quote.