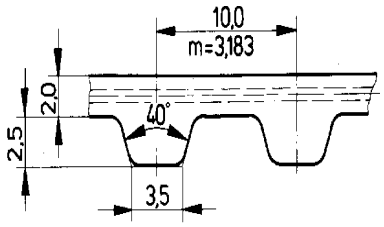

Metric Synchronous Belts

POLYURETHANE WITH STEEL CORDS*

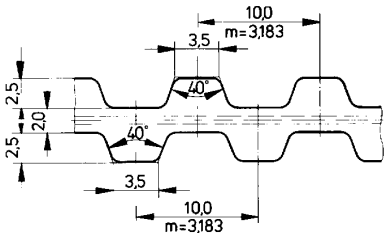

T10 (10 mm Pitch)

T10 Belt Length	T10D Belt Length	No. Teeth
10.260	10D260	26
10.340		34
10.370		37
10.400		40
10.410		41
10.440		44
10.450		45
10.480		48
10.500		50
10.530	10D530	53
10.560		56
10.600	10D600	60
10.610		61
10.630	10D630	63
10.660	10D660	66
10.680		68
10.690		69
10.700	10D700	70
10.720	10D720	72
10.730		73
10.750		75
10.780		78
	10D800	80
10.810		81
10.840	10D840	84
10.850		85
10.880		88
10.890		89
10.900	10D900	90
10.910		91
10.920		92
10.960		96
10.970		97
10.980	10D980	98
10.1010		101
10.1050		105
10.1080		108
10.1110	10D1100	111
10.1140		114
10.1150		115
	10D1210	121
10.1210	10D1240	124
10.1240	10D1250	125
10.1250		130
10.1300	10D1320	132
10.1320		
	10D1350	135
10.1350		

T10 Belt Length	T10 Belt Length	No. Teeth
10.1390		139
10.1400		140
10.1420	10D1420	142
10.1440		144
10.1450		145
10.1460		146
10.1500	10D1500	150
10.1560		156
10.1610	10D1610	161
	10D1700	170
10.1750		175
10.1780		178
	10D1800	180
10.1880	10D1880	188
10.1960		196
10.2250		225
10.3100		310
10.4780	10D4780	478

Standard Belt Width (mm)	6	7	8	10	11	12	14	16	20	25	32	50	60	75	100

Ordering Example:

10.260.6
- **10**---------- **Pitch**
- **260**---------- **Length (mm)**
- **6**---------- **Width (mm)**

10D260.6
- **10**---------- **Pitch**
- **D**---------- **Double Sided**
- **260**---------- **Length (mm)**
- **6**---------- **Width (mm)**

***Kevlar material available upon request.**

Note: Very narrow belts, such as 4 mm or 6 mm, have a reduced number of steel cords and are only suitable for light loads. Special wire configurations for narrow widths are available by special quote.