


American Standard ANSI (Inch) Poly-V Sheaves J-Profile

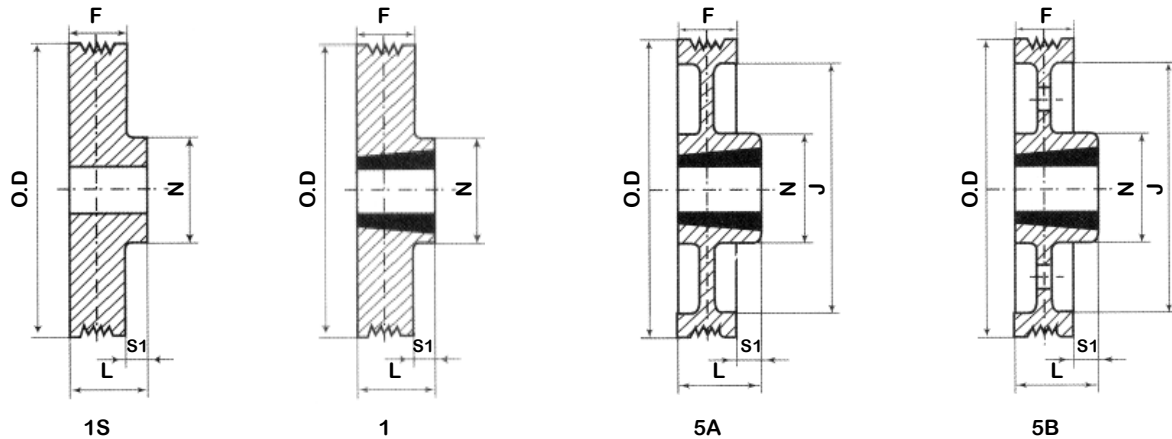


J-4

Part No.	P.D	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
4J08.MPB	0.79	0.71	-	1S	9/16	-	1/2	1	-	1/2	-	0.02
4J10.MPB	0.98	0.91	-	1S	13/16	-	1/2	1	-	1/2	-	0.03
4J15.MPB	1.57	1.50	-	1S	1 3/8	-	1/2	1	-	1/2	-	0.08
4J18.MPB	1.77	1.69	-	1S	1 9/16	-	1/2	1	-	1/2	-	0.10
4J20.MPB	1.97	1.89	-	1S	1 3/4	-	1/2	1	-	1/2	-	0.13
4J22.1108	2.20	2.13	1108	1	2	-	1/2	1	-	1/2	-	0.16
4J25.1108	2.48	2.40	1108	1	2 3/8	-	1/2	7/8	-	3/8	-	0.12
4J28.1108	2.80	2.72	1108	1	2 3/8	-	1/2	7/8	-	3/8	-	0.17
4J30.1108	2.95	2.87	1108	1	2 3/8	-	1/2	7/8	-	3/8	-	0.18
4J31.1310	3.15	3.07	1310	1	2 3/8	-	1/2	7/8	-	3/8	-	0.20
4J33.1310	3.35	3.27	1310	1	2 3/8	-	1/2	7/8	-	3/8	-	0.23
4J35.1610	3.54	3.46	1610	1	2 3/8	-	1/2	7/8	-	3/8	-	0.24
4J37.1610	3.74	3.66	1610	1	2 3/8	-	1/2	7/8	-	3/8	-	0.28
4J40.1610	3.94	3.86	1610	1	2 3/8	-	1/2	7/8	-	3/8	-	0.30
4J44.1610	4.41	4.33	1610	1	3 1/8	-	1/2	1	-	1/2	-	0.41
4J50.1610	4.92	4.84	1610	1	3 1/8	-	1/2	1	-	1/2	-	0.51
4J55.1610	5.51	5.43	1610	1	3 1/8	-	1/2	1	-	1/2	-	0.63
4J63.2012	6.30	6.22	2012	5A	3 3/8	-	1/2	1	-	1/2	-	0.79
4J78.2012	7.87	7.80	2012	5A	4 1/8	7 1/4	1/2	1 1/4	5/16	3/4	-	1.05
4J98.2012	9.84	9.76	2012	5A	4 1/8	9 3/16	1/2	1 1/4	5/16	3/4	-	1.45
4J124.2012	12.40	12.32	2012	5B	4 1/8	11 9/16	1/2	1 1/4	5/16	3/4	-	1.78

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																			
	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16
1108	•	•	•	•	•	•	•	•	•	Δ	Δ									
1310	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
1610	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Δ	Δ		
2012	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Δ

American Standard ANSI (Inch) Poly-V Sheaves J-Profile

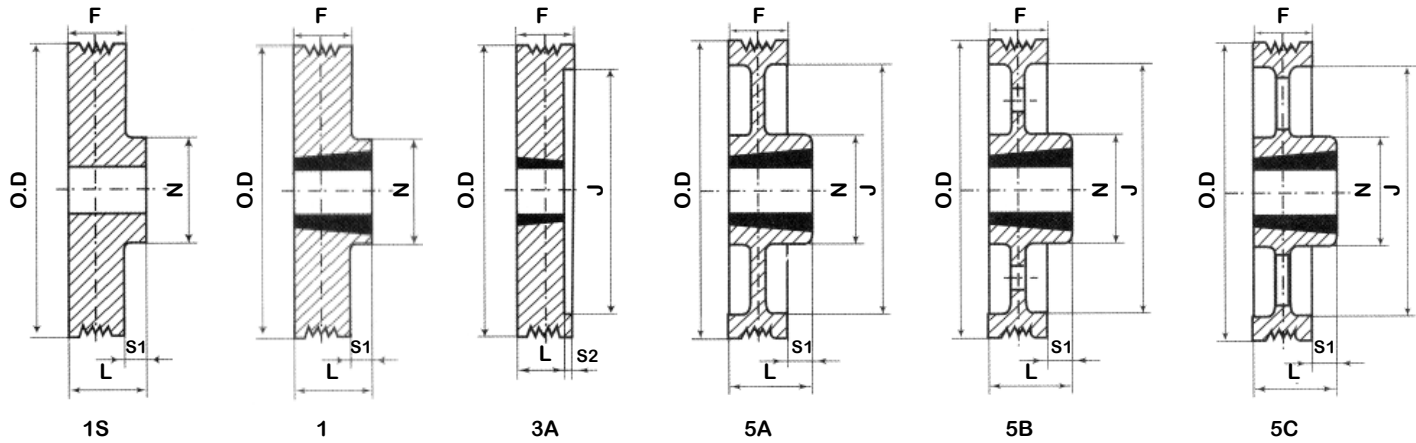


J-8

Part No.	P.D	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
8J08.MPB	0.79	0.71	-	1S	9/16	-	15/16	1 3/16	-	1/4	-	0.01
8J10.MPB	0.98	0.91	-	1S	7/8	-	15/16	1 3/16	-	1/4	-	0.01
8J15.MPB	1.57	1.50	-	1S	1 3/8	-	15/16	1 3/16	-	1/4	-	0.04
8J18.MPB	1.77	1.69	-	1S	1 9/16	-	15/16	1 3/16	-	1/4	-	0.05
8J20.MPB	1.97	1.89	-	1S	1 3/4	-	15/16	1 3/16	-	1/4	-	0.06
8J22.MPB	2.20	2.13	-	3A	2	-	15/16	1 3/16	-	1/4	-	0.11
8J25.1108	2.48	2.40	1108	1	-	1 13/16	15/16	7/8	-	-	1/16	0.16
8J28.1108	2.80	2.72	1210	1	2 9/16	-	15/16	1	-	1/16	-	0.19
8J30.1108	2.95	2.87	1210	1	2 3/4	-	15/16	1	-	1/16	-	0.23
8J31.1310	3.15	3.07	1210	1	2 3/4	-	15/16	1	-	1/16	-	0.27
8J33.1310	3.35	3.27	1210	1	2 15/16	-	15/16	1	-	1/16	-	0.32
8J35.1610	3.54	3.46	1210	1	2 15/16	-	15/16	1	-	1/16	-	0.31
8J37.1610	3.74	3.66	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.36
8J40.1610	3.94	3.86	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.42
8J42.1610	4.17	4.09	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.52
8J44.1610	4.41	4.33	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.59
8J46.1610	4.65	4.57	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.66
8J50.1610	4.92	4.84	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.68
8J52.1610	5.20	5.12	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.72
8J55.1610	5.51	5.43	1610	1	3 3/8	-	15/16	1	-	1/16	-	0.77
8J63.2012	6.30	6.22	2012	1	4 1/8	-	15/16	1 1/4	-	5/16	-	0.78
8J70.2012	7.09	5.04	2012	5A	4 1/8	6 7/16	15/16	1 1/4	1/2	5/16	-	0.92
8J78.2012	7.87	7.80	2012	5A	4 1/8	7 1/4	15/16	1 1/4	1/2	5/16	-	0.97
8J88.2012	8.82	8.74	2012	5A	4 1/8	8 3/16	15/16	1 1/4	1/2	5/16	-	1.06
8J98.2012	9.84	9.76	2012	5A	4 1/8	9 3/16	15/16	1 1/4	1/2	5/16	-	1.30
8J110.2012	11.02	10.94	2012	5B	4 1/8	10 3/8	15/16	1 1/4	1/2	5/16	-	2.08
8J124.2012	12.40	12.32	2517	5B	4 3/4	11 9/16	15/16	1 3/4	9/16	13/16	-	2.32
8J140.2517	13.98	13.90	2517	5C	4 3/4	13 1/8	15/16	1 3/4	9/16	13/16	-	2.40
8J157.2517	15.75	15.67	2517	5C	4 3/4	14 7/8	15/16	1 3/4	9/16	13/16	-	2.60

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																			
	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16
1108	•	•	•	•	•	•	•	•	•	Δ	Δ									
1310	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
1610	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Δ	Δ		
2012	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Δ

American Standard ANSI (Inch) Poly-V Sheaves J-Profile

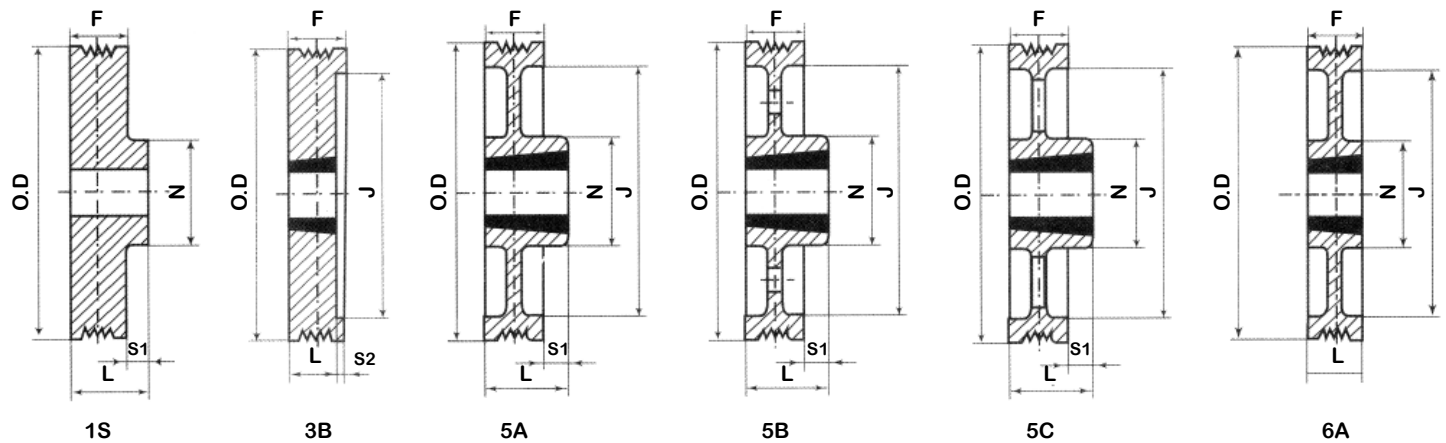


J-12

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
12J15.MPB	1.57	1.50	-	1S	1 3/8	-	1 1/4	19/16	-	5/16	-	0.04
12J18.MPB	1.77	1.69	-	1S	1 9/16	-	1 1/4	19/16	-	5/16	-	0.05
12J20.MPB	1.97	1.89	-	1S	1 3/4	-	1 1/4	19/16	-	5/16	-	0.07
12J22.MPB	2.20	2.13	-	1S	2	-	1 1/4	19/16	-	5/16	-	0.08
12J25.1108	2.48	2.40	1108	3B	-	1 13/16	1 1/4	7/8	-	-	3/8	0.13
12J28.1108	2.80	2.72	1108	3B	-	2 3/16	1 1/4	1	-	-	1/4	0.18
12J30.1610	2.95	2.87	1610	3B	-	2 3/8	1 1/4	1	-	-	1/4	0.22
12J31.1610	3.15	3.07	1610	3B	-	2 9/16	1 1/4	1	-	-	1/4	0.28
12J33.1610	3.35	3.27	1610	3B	-	2 11/16	1 1/4	1	-	-	1/4	0.30
12J35.1610	3.54	3.46	1610	3B	-	2 15/16	1 1/4	1	-	-	1/4	0.35
12J37.1610	3.74	3.66	1610	3B	-	3 1/8	1 1/4	1	-	-	1/4	0.38
12J40.1610	3.94	3.86	1610	3B	-	3 5/16	1 1/4	1	-	-	1/4	0.40
12J42.1610	4.17	4.09	1610	3B	-	3 9/16	1 1/4	1	-	-	1/4	0.48
12J44.1610	4.41	4.33	1610	3B	-	3 3/4	1 1/4	1	-	-	1/4	0.55
12J46.2012	4.65	4.57	2012	3B	-	4	1 1/4	1	-	-	1/4	0.58
12J50.2012	4.92	4.84	2012	3B	-	4 5/16	1 1/4	1	-	-	1/4	0.70
12J52.2012	5.20	5.12	2012	3B	-	4 1/2	1 1/4	1 1/4	-	-	-	0.74
12J55.2517	5.51	5.43	2517	3B	-	4 15/16	1 1/4	1 1/4	-	-	-	0.86
12J63.2517	6.30	6.22	2517	3B	-	5 11/16	1 1/4	1 1/4	-	-	-	0.96
12J70.2517	7.09	7.01	2517	6A	4 1/8	6 7/16	1 1/4	1 1/4	1/2	-	-	1.05
12J78.2517	7.87	7.80	2517	6A	4 1/8	7 1/4	1 1/4	1 1/4	1/2	-	-	1.41
12J88.2517	8.82	8.74	2517	5A	4 3/4	8 3/16	1 1/4	1 3/4	1/2	1/2	-	1.54
12J98.2517	9.84	9.76	2517	5A	4 3/4	9 3/16	1 1/4	1 3/4	1/2	1/2	-	1.60
12J110.2517	11.02	10.94	2517	5B	4 3/4	10 3/8	1 1/4	1 3/4	1/2	1/2	-	1.88
12J124.2517	12.40	12.32	2517	5B	4 3/4	11 9/16	1 1/4	1 3/4	1/2	1/2	-	2.08

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																								
	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2
1108	●	●	●	●	●	●	●	●	●	△	△														
1310	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△	△						
2012	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△	△

American Standard ANSI (Inch) Poly-V Sheaves J-Profile

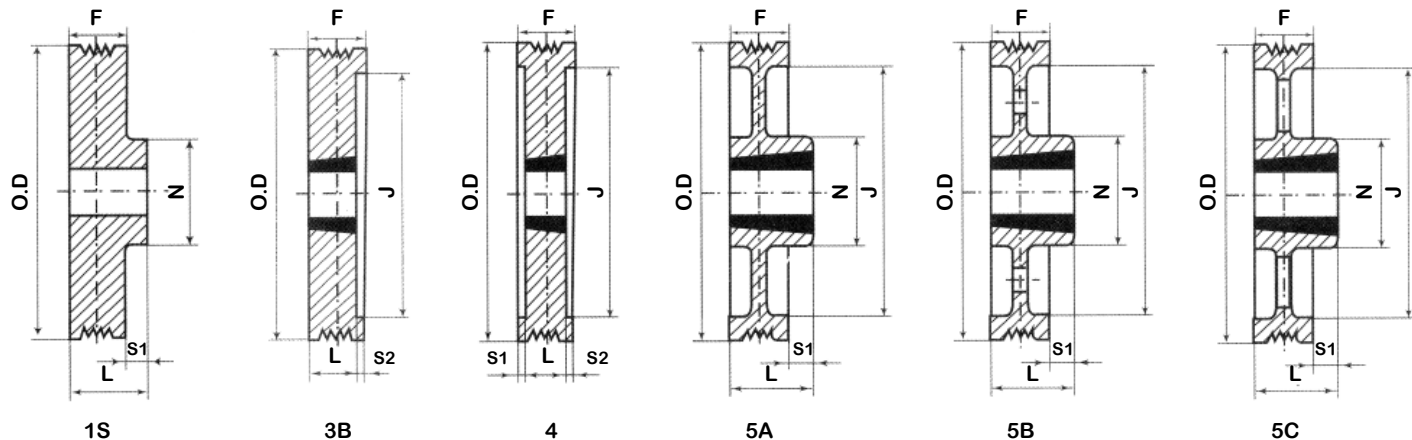


J-16

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
16J18.MPB	1.77	1.69	-	1S	1 9/16	-	1 5/8	1 7/8	-	1/4	-	0.07
16J20.MPB	1.97	1.89	-	1S	1 3/4	-	1 5/8	1 7/8	-	1/4	-	0.08
16J22.MPB	2.20	2.13	-	1S	2	-	1 5/8	1 7/8	-	1/4	-	0.10
16J25.MPB	2.48	2.40	-	4	-	1 13/16	1 5/8	7/8	-	3/8	3/8	0.16
16J28.1215	2.80	2.72	1215	4	-	2 3/16	1 5/8	1	-	5/16	5/16	0.20
16J30.1610	2.95	2.87	1210	4	-	2 3/8	1 5/8	1	-	5/16	5/16	0.25
16J31.1610	3.15	3.07	1610	4	-	2 9/16	1 5/8	1	-	5/16	5/16	0.10
16J.331610	3.35	3.27	1610	4	-	2 11/16	1 5/8	1	-	5/16	5/16	0.35
16J35.1610	3.54	3.46	1610	4	-	2 15/16	1 5/8	1	-	5/16	5/16	0.39
16J37.1610	3.74	3.66	1610	4	-	3 1/8	1 5/8	1	-	5/16	5/16	0.40
16J40.1610	3.94	3.86	1610	4	-	3 5/16	1 5/8	1	-	5/16	5/16	0.40
16J42.1610	4.17	4.09	1610	4	-	3 9/16	1 5/8	1	-	5/16	5/16	0.52
16J44.1610	4.41	4.33	1610	3B	-	3 3/4	1 5/8	1 1/4	-	3/8	-	0.60
16J46.2012	4.65	4.57	2012	3B	-	4	1 5/8	1 1/4	-	3/8	-	0.72
16J50.2012	4.92	4.84	2012	3B	-	4 5/16	1 5/8	1 1/4	-	3/8	-	0.80
16J52.2012	5.20	5.12	2012	3B	-	4 1/2	1 5/8	1 1/4	-	3/8	-	0.92
16J55.2517	5.51	5.43	2517	3B	-	4 15/16	1 5/8	1 1/4	-	3/8	-	1.04
16J63.2517	6.30	6.22	2517	3B	-	5 11/16	1 5/8	1 1/4	-	3/8	-	1.40
16J70.2517	7.09	7.01	2517	5A	4 3/4	6 7/16	1 5/8	1 3/4	1/2	1/8	-	1.76
16J78.2517	7.87	7.80	2517	5A	4 3/4	7 1/4	1 5/8	1 3/4	1/2	1/8	-	1.88
16J88.2517	8.82	8.74	2517	5A	4 3/4	8 3/16	1 5/8	1 3/4	1/2	1/8	-	1.92
16J98.2517	9.84	9.76	2517	5A	4 3/4	9 3/16	1 5/8	1 3/4	1/2	1/8	-	2.04
16J110.3535	11.02	10.94	3535	5B	4 3/4	10 3/8	1 5/8	1 3/4	1/2	1/8	-	2.12
16J120.3535	12.40	12.32	3535	5B	4 3/4	11 9/16	1 5/8	1 3/4	1/2	1/8	-	2.40
16J140.3535	13.98	13.90	3535	5C	4 3/4	13 1/8	1 5/8	1 3/4	9/16	1/8	-	2.84
16J160.3535	15.75	15.67	3535	5C	4 3/4	14 7/8	1 5/8	1 3/4	9/16	1/8	-	3.47

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																								
	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2
1108	●	●	●	●	●	●	●	●	●	△	△														
1310	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△	△						
2012	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△	△

American Standard ANSI (Inch) Poly-V Sheaves J-Profile

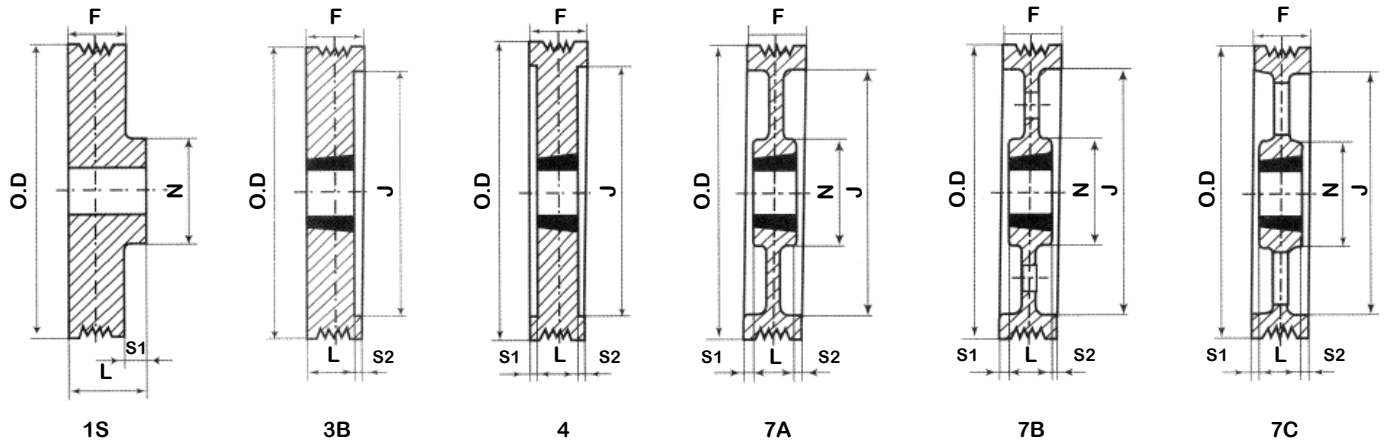


J-20

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
20J18.MPB	1.77	1.69	-	1S	1 3/8	-	2 1/16	2 5/16	-	1/4	-	0.08
20J20.MPB	1.97	1.89	-	1S	1 9/16	-	2 1/16	2 5/16	-	1/4	-	0.10
20J22.MPB	2.20	2.13	-	1S	1 3/4	-	2 1/16	2 5/16	-	1/4	-	0.13
20J25.MPB	2.48	2.40	-	1S	2 3/16	-	2 1/16	2 5/16	-	1/4	-	0.16
20J28.1215	2.80	2.72	1215	4	-	2 3/16	2 1/16	1	-	9/16	9/16	0.25
20J30.1615	2.95	2.87	1615	4	-	2 3/8	2 1/16	1	-	9/16	9/16	0.28
20J31.1615	3.15	3.07	1615	4	-	2 9/16	2 1/16	1	-	9/16	9/16	0.33
20J33.1615	3.35	3.27	1615	4	-	2 11/16	2 1/16	1	-	9/16	9/16	0.40
20J35.1615	3.54	3.46	1615	4	-	2 13/16	2 1/16	1	-	9/16	9/16	0.44
20J37.1615	3.74	3.66	1615	4	-	3 1/8	2 1/16	1	-	9/16	9/16	0.52
20J40.1615	3.94	3.86	1615	4	-	3 5/16	2 1/16	1	-	9/16	9/16	0.60
20J42.1615	4.17	4.09	1615	4	-	3 9/16	2 1/16	1	-	9/16	9/16	0.68
20J44.1615	4.41	4.33	1615	4	-	3 3/4	2 1/16	1 1/4	-	3/8	3/8	0.76
20J46.2012	4.65	4.57	2012	4	-	4	2 1/16	1 1/4	-	3/8	3/8	0.84
20J50.2517	4.92	4.84	2517	3B	-	4 5/16	2 1/16	1 3/4	-	-	1/4	1.08
20J52.2517	5.20	5.12	2517	3B	-	4 1/2	2 1/16	1 3/4	-	-	1/4	1.28
20J55.2517	5.51	5.43	2517	3B	-	4 15/16	2 1/16	1 3/4	-	-	1/4	1.84
20J63.2517	6.30	6.22	2517	3B	-	5 11/16	2 1/16	1 3/4	-	-	1/4	2.00
20J70.2517	7.09	7.01	2517	3B	-	6 7/16	2 1/16	1 3/4	-	-	1/4	2.16
20J78.2517	7.87	7.80	2517	7A	4 3/4	7 1/4	2 1/16	1 3/4	1/2	-	1/4	2.88
20J88.2517	8.82	8.74	2517	7A	5 11/16	8 3/16	2 1/16	2	1/2	-	1/16	3.12
20J98.2517	9.84	9.76	2517	7A	5 11/16	9 3/16	2 1/16	2	1/2	-	1/16	3.31
20J110.2517	11.02	10.94	2517	7B	5 11/16	10 3/8	2 1/16	2	9/16	-	1/16	3.79
20J124.2517	12.48	12.32	2517	7B	5 11/16	11 9/16	2 1/16	2	9/16	-	1/16	4.39
20J140.3020	14.06	13.90	3020	7C	5 11/16	13 1/8	2 1/16	2	5/8	-	1/16	5.27
20J157.3020	15.83	15.67	3020	7C	5 11/16	14 7/8	2 1/16	2	5/8	-	1/16	6.11

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																								
	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2
1108	●	●	●	●	●	●	●	●	●	△	△														
1310	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△	△							
2012	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△	△

American Standard ANSI (Inch) Poly-V Sheaves L-Profile

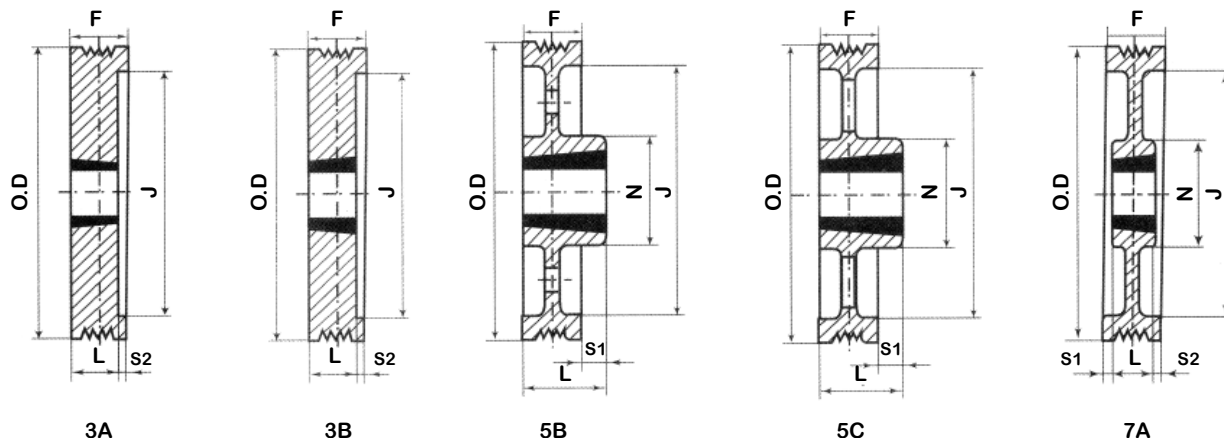


L-6

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
6L32.1210	3.15	2.87	1210	3A	-	2 5/16	1 9/16	1	-	-	9/16	0.33
6L34.1210	3.35	3.07	1210	3A	-	2 5/16	1 9/16	1	-	-	9/16	0.38
6L36.1610	3.54	3.27	1610	3A	-	2 11/16	1 9/16	1	-	-	9/16	0.41
6L38.1610	3.74	3.46	1610	3A	-	2 3/4	1 9/16	1	-	-	9/16	0.51
6L40.1610	3.94	3.66	1610	3A	-	2 13/16	1 9/16	1	-	-	9/16	0.54
6L42.1610	4.17	3.90	1610	3B	-	2 7/8	1 9/16	1	-	-	9/16	0.66
6L44.1610	4.41	4.13	1610	3B	-	3 1/8	1 9/16	1	-	-	9/16	0.76
6L46.2012	4.65	4.37	1610	3B	-	3 1/2	1 9/16	1	-	-	9/16	0.84
6L50.2012	4.92	4.65	1610	3B	-	3 9/16	1 9/16	1	-	-	9/16	0.90
6L52.2012	5.20	4.92	2012	3B	-	4 1/8	1 9/16	1 1/4	-	-	1/4	1.25
6L56.2517	5.51	5.24	2012	3B	-	4 5/16	1 9/16	1 1/4	-	-	1/4	1.46
6L64.2517	6.30	6.02	2012	3B	-	4 15/16	1 9/16	1 1/4	-	-	1/4	1.68
6L70.2517	7.09	6.81	2012	3B	-	5 11/16	1 9/16	1 1/4	-	-	1/4	1.73
6L78.2517	7.87	7.60	2012	7A	4 1/8	6 9/16	1 9/16	1 1/4	9/16	-	1/4	1.76
6L88.2517	8.82	8.54	2012	7A	4 1/8	7 1/2	1 9/16	1 1/4	9/16	-	1/4	2.26
6L100.2517	9.84	9.57	2012	7A	4 1/8	8 9/16	1 9/16	1 1/4	9/16	-	1/4	2.45
6L110.2517	11.02	10.75	2517	5B	4 3/4	9 3/4	1 9/16	1 3/4	9/16	1/4	-	3.08
6L120.2517	12.40	12.13	2517	5B	4 3/4	10 7/8	1 9/16	1 3/4	5/8	1/4	-	3.33
6L140.3020	13.98	13.70	3020	5C	5 11/16	12 7/16	1 9/16	2	5/8	1/2	-	4.22
6L160.3020	15.75	15.47	3020	5C	5 11/16	14 3/16	1 9/16	2	5/8	1/2	-	4.79

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																											
	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2	2 13/16	2 3/8	2 9/16	2 3/4	2 15/16	
1310	●	●	●	●	●	●	●	●	●	●	●	●																
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△									
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

American Standard ANSI (Inch) Poly-V Sheaves L-Profile

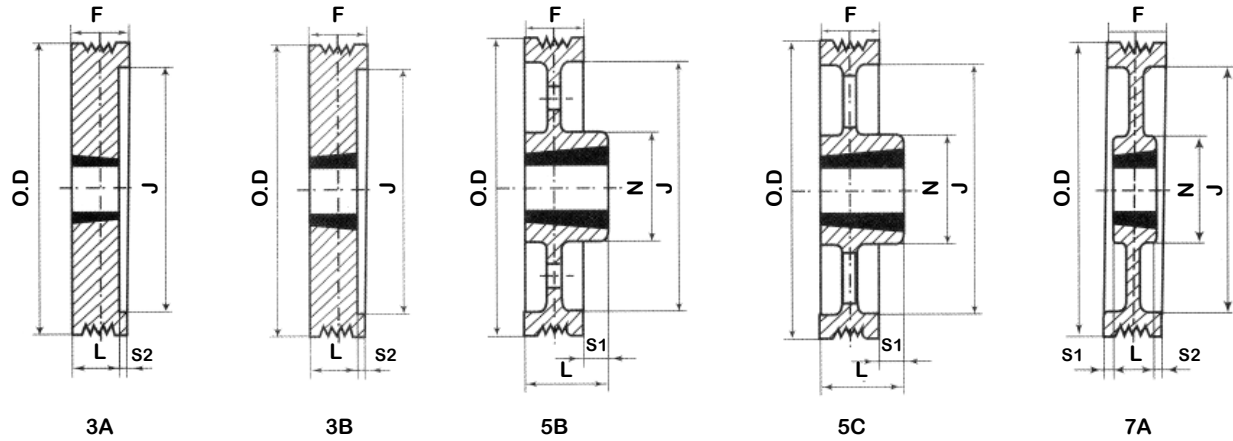


L-8

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
8L30.1210	2.95	2.68	1210	3A	-	1 13/16	1 13/16	7/8	-	-	15/16	0.26
8L32.1210	3.15	2.87	1210	3A	-	2 5/16	1 13/16	1	-	-	13/16	0.27
8L34.1210	3.35	3.07	1210	3A	-	2 5/16	1 13/16	1	-	-	13/16	0.11
8L36.1610	3.54	3.27	1610	3A	-	2 11/16	1 13/16	1	-	-	13/16	0.40
8L38.1610	3.74	3.46	1610	3A	-	2 3/4	1 13/16	1	-	-	13/16	0.52
8L40.1610	3.94	3.66	1610	3A	-	2 13/16	1 13/16	1	-	-	13/16	0.44
8L42.1610	4.17	3.90	1610	4	-	2 7/8	1 13/16	1	-	7/16	7/16	0.48
8L44.1610	4.41	4.13	1610	4	-	3 1/8	1 13/16	1 1/4	-	1/4	1/4	0.48
8L46.2012	4.65	4.37	2012	4	-	3 1/2	1 13/16	1 1/4	-	1/4	1/4	0.61
8L50.2012	4.92	4.65	2012	4	-	3 9/16	1 13/16	1 1/4	-	1/4	1/4	0.72
8L52.2012	5.20	4.92	2012	4	-	4 1/8	1 13/16	1 1/4	-	1/4	1/4	0.80
8L56.2517	5.51	5.24	2517	4	-	4 5/16	1 13/16	1 1/4	-	1/4	1/4	1.00
8L64.2517	6.30	6.02	2217	4	-	4 15/16	1 13/16	1 1/4	-	1/4	1/4	1.16
8L70.2517	7.09	6.81	2517	3B	-	5 11/16	1 13/16	1 3/4	-	-	1/16	1.64
8L78.2517	7.87	7.60	2517	3B	-	6 9/16	1 13/16	1 3/4	-	-	1/16	1.88
8L88.2517	8.82	8.54	2517	7A	4 3/4	7 1/2	1 13/16	1 3/4	1/2	-	1/16	2.04
8L98.2012	9.84	9.57	2012	4A	4 3/4	8 9/16	1 13/16	1 3/4	1/2	-	1/16	2.56
8L110.3020	11.02	10.75	3020	5B	5 3/4	9 3/4	1 13/16	2	9/16	3/16	-	2.60
8L120.3020	12.40	12.13	3020	5B	5 3/4	9 11/16	1 13/16	2	9/16	3/16	-	2.72
8L140.3020	13.98	13.70	3020	5C	5 3/4	12 7/16	1 13/16	2	9/16	3/16	-	3.19
8L160.3020	15.75	15.47	3020	5C	6 5/8	14 3/16	1 13/16	2 1/2	5/8	11/16	-	3.67
8L180.3020	17.72	17.44	3020	5C	6 5/8	16 3/16	1 13/16	2 1/2	13/16	11/16	-	5.03
8L200.3020	19.69	19.41	3020	5C	8 1/2	18 1/8	1 13/16	3	13/16	1 3/16	-	5.19
8L240.3020	24.80	24.53	3020	5C	8 1/2	23 1/4	1 13/16	3	13/16	1 3/16	-	7.03

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																											
	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2	2 13/16	2 3/8	2 9/16	2 3/4	2 15/16	
1310	●	●	●	●	●	●	●	●	●	●	●	●																
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△									
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

American Standard ANSI (Inch) Poly-V Sheaves L-Profile

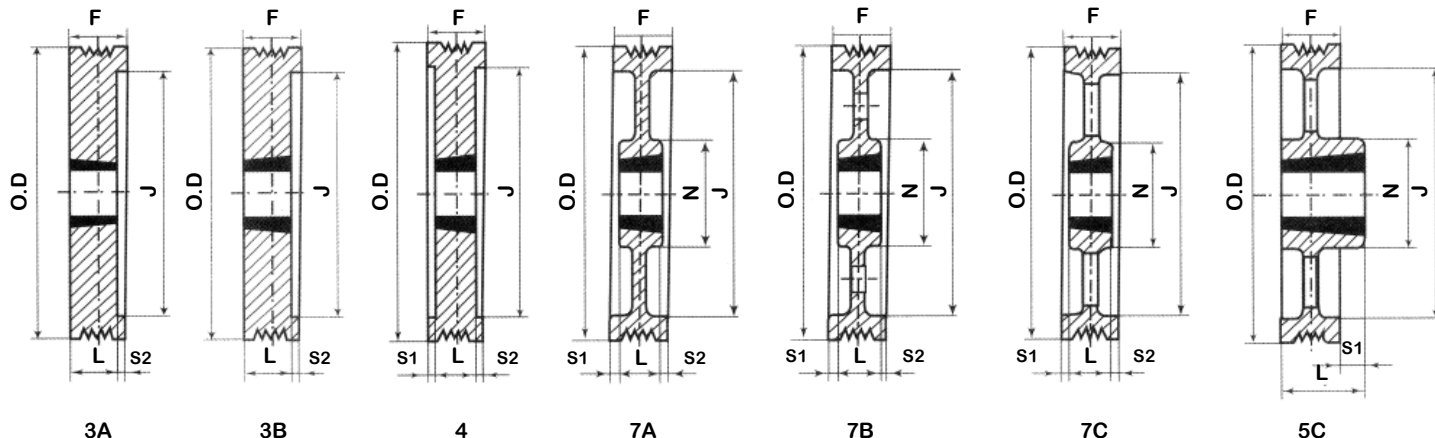


L-10

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
10L30.1215	2.95	2.68	1215	3A	-	1 13/16	2 1/4	7/8	-	-	1 3/8	0.55
10L32.1215	3.15	2.87	1215	3A	-	2 5/16	2 1/4	1	-	-	1 1/4	0.60
10L34.1215	3.35	3.07	1215	3A	-	2 5/16	2 1/4	1	-	-	1 1/4	0.62
10L36.1615	3.54	3.27	1615	3A	-	2 11/16	2 1/4	1 1/2	-	-	3/4	0.66
10L38.1615	3.74	3.46	1615	3A	-	2 3/4	2 1/4	1 1/2	-	-	3/4	0.71
10L40.2012	3.94	3.66	201 2	3A	-	2 13/16	2 1/4	1 1/2	-	-	3/4	0.77
10L42.2012	4.17	3.90	2012	4	-	2 7/8	2 1/4	1 1/2	-	3/8	3/8	0.86
10L44.2012	4.41	4.13	2012	4	-	3 1/8	2 1/4	1 1/4	-	1/2	1/2	0.95
10L46.2517	4.65	4.37	2517	4	-	3 1/2	2 1/4	1 1/4	-	1/2	1/2	1.03
10L50.2517	4.92	4.65	2517	4	-	3 9/16	2 1/4	1 1/4	-	1/2	1/2	0.90
10L52.2517	5.20	4.92	2517	4	-	4 1/8	2 1/4	1 1/4	-	1/2	1/2	1.27
10L56.2517	5.51	5.24	2517	4	-	4 5/16	2 1/4	1 1/4	-	1/2	1/2	1.58
10L64.2517	6.30	6.02	2517	4	-	4 15/16	2 1/4	1 1/4	-	1/2	1/2	1.93
10L70.2517	7.09	6.81	2517	3B	-	5 11/16	2 1/4	1 3/4	-	-	1/2	2.78
10L78.3020	7.87	7.60	3020	3B	4 3/4	6 9/16	2 1/4	1 3/4	-	-	1/2	3.68
10L88.3020	8.82	8.54	3020	7A	4 3/4	7 1/2	2 1/4	1 3/4	1/2	-	1/2	2.86
10L100.3020	9.84	9.57	3020	7A	5 11/16	8 9/16	2 1/4	1 3/4	1/2	-	1/2	3.10
10L110.3020	11.02	10.75	3020	7B	5 11/16	9 3/4	2 1/4	2	9/16	-	1/4	3.91
10L120.3535	12.40	12.13	3535	7B	5 11/16	9 11/16	2 1/4	2	9/16	-	1/4	4.67
10L140.3535	13.98	13.70	3535	7C	6 9/16	12 7/16	2 1/4	2	5/8	-	1/4	6.07
10L160.3535	15.75	15.47	3535	5C	6 5/8	14 3/16	2 1/4	2 1/2	5/8	1/4	-	6.51
10L180.3535	17.72	17.44	3535	5C	8 1/2	16 3/16	2 1/4	2 1/2	3/4	1/4	-	8.59
10L200.3535	19.69	19.41	3535	5C	8 1/2	18 1/8	2 1/4	3	3/4	3/4	-	10.30
10L240.3535	24.80	24.53	3535	5C	8 1/2	23 1/4	2 1/4	3	7/8	3/4	-	13.14

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																											
	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2	2 13/16	2 3/8	2 9/16	2 3/4	2 15/16	
1310	●	●	●	●	●	●	●	●	●	●	●	●																
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△									
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

American Standard ANSI (Inch) Poly-V Sheaves L-Profile

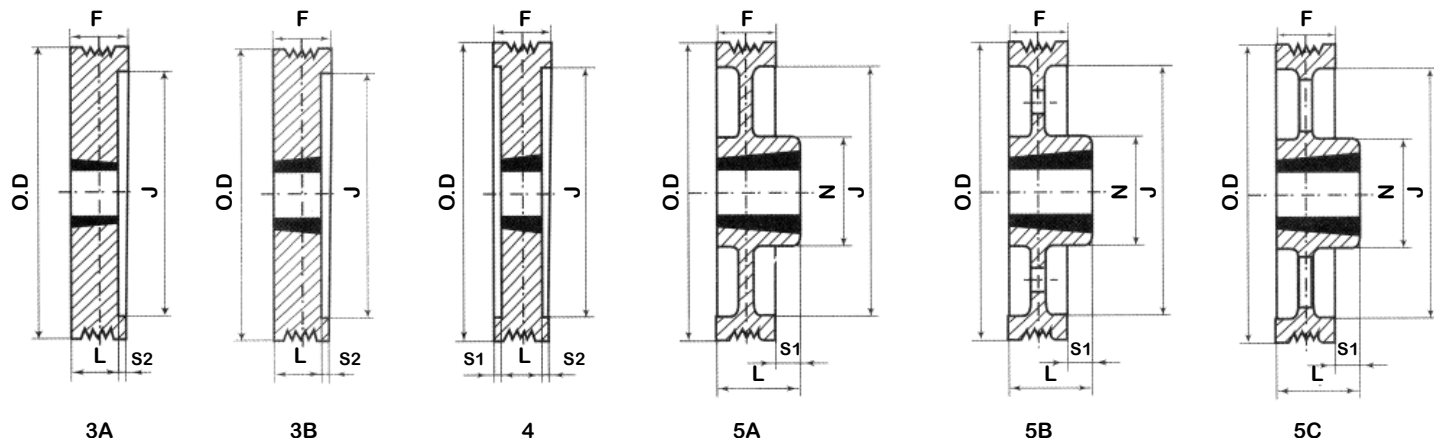


L-12

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
12L30.1215	2.95	2.68	1215	3A	-	1 13/16	2 5/8	7/8	-	-	1 3/4	0.40
12L32.1215	3.15	2.87	1215	3A	-	2 5/16	2 5/8	1	-	-	1 5/8	0.46
12L34.1215	3.35	3.07	1215	3A	-	2 5/16	2 5/8	1	-	-	1 5/8	0.47
12L36.1615	3.54	3.27	1615	3A	-	2 11/16	2 5/8	1 1/2	-	-	1 1/8	0.52
12L38.1615	3.74	3.46	1615	3A	-	2 3/4	2 5/8	1 1/2	-	-	1 1/8	0.62
12L40.2012	3.94	3.66	2012	3A	-	2 13/16	2 5/8	1 1/2	-	-	1 1/8	0.56
12L42.2012	4.17	3.90	2012	3A	-	2 7/8	2 5/8	1 1/2	-	-	1 1/8	0.72
12L44.2012	4.41	4.13	2012	4	-	3 1/8	2 5/8	1 1/4	-	11/16	11/16	1.20
12L46.2517	4.65	4.37	2517	4	-	3 1/2	2 5/8	1 1/4	-	11/16	11/16	0.92
12L50.2517	4.92	4.65	2517	4	-	3 9/16	2 5/8	1 1/4	-	11/16	11/16	1.00
12L52.2517	5.20	4.92	2517	4	-	4 1/8	2 5/8	1 3/4	-	7/16	7/16	1.12
12L56.2517	5.51	5.24	2517	4	-	4 5/16	2 5/8	1 3/4	-	7/16	7/16	1.36
12L64.2517	6.30	6.02	2517	4	-	4 15/16	2 5/8	1 3/4	-	7/16	7/16	1.96
12L70.2517	7.09	6.81	2517	4	-	5 11/16	2 5/8	1 3/4	-	7/16	7/16	2.48
12L78.3020	7.87	7.60	3020	4	-	6 9/16	2 5/8	1 3/4	-	7/16	7/16	2.60
12L88.3020	8.82	8.54	3020	5A	4 15/16	7 1/2	2 5/8	3	9/16	3/8	-	3.00
12L100.3020	9.84	9.57	3020	5A	4 15/16	8 9/16	2 5/8	3	9/16	3/8	-	3.19
12L110.3020	11.02	10.75	3020	5B	5 3/4	9 3/4	2 5/8	3	5/8	3/8	-	3.51
12L120.3535	12.40	12.13	3535	5B	5 3/4	9 11/16	2 5/8	3	5/8	3/8	-	4.31
12L140.3535	13.98	13.70	3535	5C	6 5/8	12 7/16	2 5/8	3 1/2	13/16	7/8	-	5.07
12L160.3535	15.75	15.47	3535	5C	6 5/8	14 3/16	2 5/8	3 1/2	13/16	7/8	-	5.31
12L180.3535	17.72	17.44	3535	5C	6 5/8	16 3/16	2 5/8	3 1/2	7/8	7/8	-	7.59
12L200.3535	19.69	19.41	3535	5C	8 1/2	18 1/8	2 5/8	3	7/8	3/8	-	7.99
12L240.3535	24.80	24.53	3535	5C	8 1/2	23 1/4	2 5/8	3	1	3/8	-	11.98

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																											
	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2	2 13/16	2 3/8	2 9/16	2 3/4	2 15/16	
1310	●	●	●	●	●	●	●	●	●	●	●	●																
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△									
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

American Standard ANSI (Inch) Poly-V Sheaves L-Profile

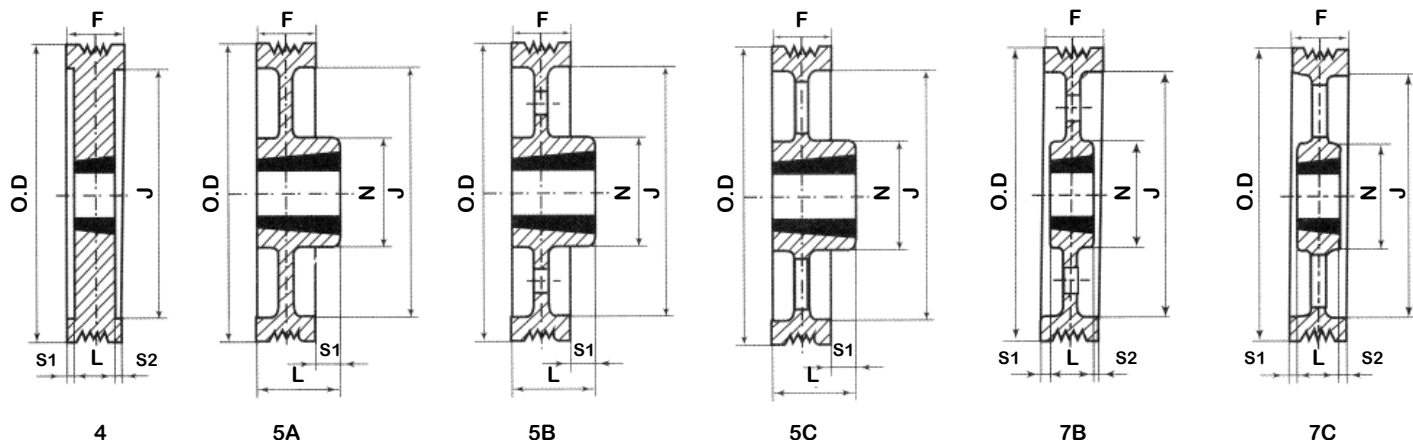


L-16

Part No.	P.D	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
16L34.1215	3.35	3.07	1215	4	-	2 11/16	3 3/8	1 1/2	-	15/16	15/16	0.48
16L36.1615	3.54	3.27	1615	4	-	2 11/16	3 3/8	1 1/2	-	15/16	15/16	0.64
16L38.1615	3.74	3.46	1615	4	-	2 3/4	3 3/8	1 1/2	-	15/16	15/16	0.68
16L40.2012	3.94	3.66	2012	4	-	2 13/16	3 3/8	1 1/2	-	15/16	15/16	0.72
16L42.2517	4.17	3.90	2517	4	-	2 7/8	3 3/8	1 1/2	-	15/16	15/16	0.92
16L44.2012	4.41	4.13	2012	4	-	3 1/8	3 3/8	1 1/4	-	1 1/16	1 1/16	1.00
16L46.2517	4.65	4.37	2517	4	-	3 1/2	3 3/8	1 1/4	-	1 1/16	1 1/16	1.04
16L50.2517	4.92	4.65	2517	4	-	3 1/2	3 3/8	1 1/4	-	1 1/16	1 1/16	1.12
16L52.2517	5.20	4.92	2517	4	-	4 1/8	3 3/8	1 3/4	-	13/16	13/16	1.28
16L56.2517	5.51	5.24	2517	4	-	4 5/16	3 3/8	1 3/4	-	13/16	13/16	1.64
16L64.3020	6.30	6.02	3020	4	-	4 7/8	3 3/8	1 3/4	-	13/16	13/16	2.20
16L70.3020	7.09	6.81	3020	4	-	5 11/16	3 3/8	1 3/4	-	13/16	13/16	2.96
16L78.3020	7.87	7.60	3020	4	-	6 9/16	3 3/8	1 3/4	-	1 3/16	1 3/16	3.75
16L88.3020	8.82	8.54	3020	7B	4 15/16	7 1/2	3 3/8	3	13/16	3/8	-	4.27
16L100.3020	9.84	9.57	3020	7B	4 15/16	8 9/16	3 3/8	3	13/16	3/8	-	4.79
16L110.3535	11.02	10.75	3535	7B	5 11/16	9 3/4	3 3/8	3	7/8	3/8	-	4.87
16L120.3535	12.40	12.13	3535	7B	6 5/8	11	3 3/8	3 1/2	7/8	5/8	5/8	5.51
16L140.3535	13.98	13.70	3535	7C	6 5/8	12 7/16	3 3/8	3 1/2	1	5/8	5/8	7.67
16L160.3535	15.75	15.47	3535	7C	6 5/8	14 3/16	3 3/8	3 1/2	1	5/8	5/8	7.67
16L180.3535	17.72	17.44	3535	5C	8 1/2	16 3/16	3 3/8	4	1	5/8	-	8.79
16L200.3535	19.69	19.41	3535	5C	8 1/2	18 1/8	3 3/8	4	1 1/8	5/8	-	11.26
16L7240.4040	24.80	24.53	4040	5C	8 1/2	23 1/4	3 3/8	4	1 1/8	5/8	-	14.10

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																											
	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2	2 13/16	2 3/8	2 9/16	2 3/4	2 15/16	
1310	●	●	●	●	●	●	●	●	●	●	●	●																
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△								
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

American Standard ANSI (Inch) Poly-V Sheaves L-Profile

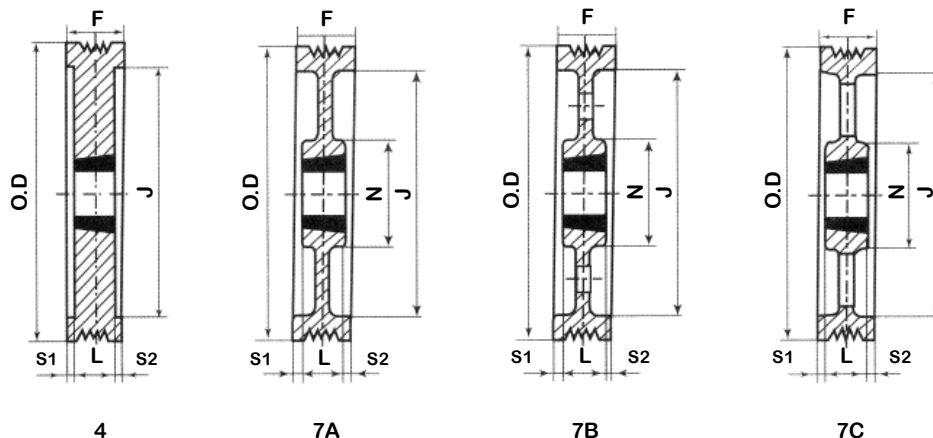

L-20

Part No.	P.D.	O.D.	Bush	Type	N	J	F	L	E	S1	S2	Wt lbs
20L52.2517	5.20	4.92	2517	4	-	4 1/8	4 1/8	1 3/4	-	1 3/16	1 3/16	1.60
20L56.2517	5.51	5.24	2517	4	-	4 5/16	4 1/8	1 3/4	-	1 3/16	1 3/16	1.76
20L64.3020	6.30	6.02	3020	4	-	4 15/16	4 1/8	1 3/4	-	1 3/16	1 3/16	2.32
20L70.3020	7.09	6.81	3020	4	-	5 11/16	4 1/8	1 3/4	-	1 3/16	1 3/16	3.19
20L78.3535	7.87	7.60	3535	4	-	6 9/16	4 1/8	3	-	1 3/16	1 3/16	4.39
20L88.3535	8.82	8.54	3535	7A	4 15/16	7 1/2	4 1/8	3	3/4	9/16	9/16	6.15
20L100.3535	9.84	9.57	3535	7A	4 15/16	8 9/16	4 1/8	3	3/4	9/16	9/16	8.39
20L110.3535	11.02	10.75	3535	7B	6 5/8	9 3/4	4 1/8	3 1/2	7/8	-	5/8	9.11
20L120.4040	12.40	12.13	4040	7B	6 5/8	10 7/8	4 1/8	3 1/2	7/8	-	5/8	10.22
20L140.4040	13.98	13.70	4040	7C	6 5/8	12 7/16	4 1/8	3 1/2	1 1/8	-	5/8	11.26
20L160.4040	15.75	15.47	4040	7C	8 1/2	14 3/16	4 1/8	4	1 1/8	-	1/8	11.90
20L180.4040	17.72	17.44	4040	7C	8 1/2	16 3/16	4 1/8	4	1 3/16	-	1/8	14.22
20L200.5050	19.69	19.41	5050	7C	8 1/2	18 1/8	4 1/8	4	1 3/16	-	1/8	15.02
1207240.5050	24.80	24.53	5050	7C	8 1/2	23 1/4	4 1/8	4	1 3/16	-	1/8	21.17

Standard Bore Dimensions of Taper-Lock® Bushings

Bushing	Stock Bores																											
	11/16	3/4	13/16	7/8	15/16	1	1 1/16	1 1/8	1 3/16	1 1/4	1 5/16	1 3/8	1 7/16	1 1/2	1 9/16	1 5/8	1 11/16	1 3/4	1 13/16	1 7/8	1 15/16	2	2 13/16	2 3/8	2 9/16	2 3/4	2 15/16	
1310	●	●	●	●	●	●	●	●	●	●	●	●																
1610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	△									
2012			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
2517					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
3020								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●