




American (Inch Pitch) Taper-Bushing Synchronous Belt Pulleys




Type 1F




Type 2F




Type 3




Type 4




Type 5F




Type 6F




Type 7




Type 8




Type 9F




Type 10F




Type 11



Type 12



Type 13F

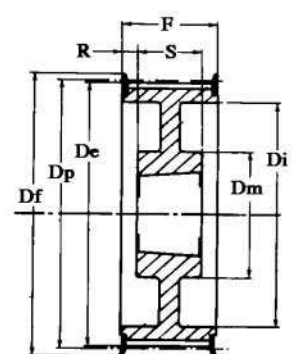

Type 14F



American (Inch Pitch) Taper-Bushing Synchronous Belt Pulleys



L 050 Pitch 3/8" (9.52 mm)

Part No.	Type/ Mat.	Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
18 L 050 TL.1108	1F/S	18	1108	2.15	2.12	2 3/8	1 11/16		3/4	7/8	1/8	48x60x1.5
19 L 050 TL.1108	1F/S	19	1108	2.27	2.24	2 1/2	1 11/16		3/4	7/8	1/8	47x64x1.5
20 L 050 TL.1108	1F/S	20	1108	2.39	2.36	2 5/8	1 7/8		3/4	7/8	1/8	53x66.5x1.5
21 L 050 TL.1108	1F/S	21	1108	2.51	2.48	2 3/4	1 7/8		3/4	7/8	1/8	53x70x1.5
22 L 050 TL.1108	1F/S	22	1108	2.63	2.60	2 15/16	2		3/4	7/8	1/8	57x75x1.5
23 L 050 TL.1108	1F/S	23	1108	2.75	2.72	3 1/8	2 1/8		3/4	7/8	1/8	60x79x1.5
24 L 050 TL.1108	1F/S	24	1108	2.86	2.83	3 1/8	2 1/8		3/4	7/8	1/8	60x79x1.5
25 L 050 TL.1108	1F/S	25	1108	2.98	2.95	3 1/4	2 3/16		3/4	7/8	1/8	64x82.5x1.5
26 L 050 TL.1108	1F/S	26	1108	3.10	3.07	3 3/8	2 3/8		3/4	7/8	1/8	68x86x1.5
27 L 050 TL.1108	1F/S	27	1108	3.22	3.19	3 3/8	2 7/16		3/4	7/8	1/8	68x86x1.5
28 L 050 TL.1108	1F/S	28	1108	3.34	3.31	3 9/16	2 9/16		3/4	7/8	1/8	73x91x1.5
30 L 050 TL.1108	1F/S	30	1108	3.58	3.55	3 13/16	2 3/4		3/4	7/8	1/8	79x97x1.5
32 L 050 TL.1108	1F/S	32	1108	3.82	3.79	4	2 15/16		3/4	7/8	1/8	82.5x102x1.5
36 L 050 TL.1108	1F/S	36	1108	4.30	4.27	4 1/2	3 3/8		3/4	7/8	1/8	94x115x1.5
40 L 050 TL.1610	1F/S	40	1610	4.77	4.74	5 1/16	3 13/16		3/4	1	1/4	107x128x1.5
44 L 050 TL.1610	2F/S	44	1610	5.25	5.22	5 9/16	3 7/16		3/4	1	1/4	120x142x1.5
48 L 050 TL.1610	2F/S	48	1610	5.73	5.70	5 7/8	3 7/16	4 3/4	3/4	1	1/4	130x150x1.5
60 L 050 TL.1610	3/C	60	1610	7.16	7.13		3 5/8	6 9/16	3/4	1	1/8	
72 L 050 TL.1610	4/C	72	1610	8.59	8.56		3 5/8	7 15/16	3/4	1	1/8	
84 L 050 TL.1610	4/C	84	1610	10.03	10.00		3 5/8	9 5/16	3/4	1	1/8	
96 L 050 TL.2012	4/C	96	2012	11.46	11.43		4 3/16	10 5/8	3/4	1 1/4	1/4	
120 L 050 TL.2012	4/C	120	2012	14.32	14.29		4 3/16	13 1/2	3/4	1 1/4	1/4	


L 075 Pitch 3/8" (9.52 mm)

Part No.	Type/ Mat.	Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
18 L 075 TL.1108	5F/S	18	1108	2.15	2.12	2 3/8			1	1		48x60x1.5
19 L 075 TL.1108	5F/S	19	1108	2.27	2.24	2 1/2			1	1		47x64x1.5
20 L 075 TL.1108	5F/S	20	1108	2.39	2.36	2 5/8			1	1		53x66.5x1.5
21 L 075 TL.1108	5F/S	21	1108	2.51	2.48	2 3/4			1	1		53x70x1.5
22 L 075 TL.1108	5F/S	22	1108	2.63	2.60	2 15/16			1	1		57x75x1.5
23 L 075 TL.1108	5F/S	23	1108	2.75	2.72	3 1/8			1	1		60x79x1.5
24 L 075 TL.1108	5F/S	24	1108	2.86	2.83	3 1/8			1	1		60x79x1.5
25 L 075 TL.1108	5F/S	25	1108	2.98	2.95	3 1/4			1	1		64x82.5x1.5
26 L 075 TL.1108	5F/S	26	1108	3.10	3.07	3 3/8			1	1		68x86x1.5
27 L 075 TL.1108	5F/S	27	1108	3.22	3.19	3 3/8			1	1		68x86x1.5
28 L 075 TL.1108	5F/S	28	1108	3.34	3.31	3 9/16			1	1		73x91x1.5
30 L 075 TL.1108	5F/S	30	1108	3.58	3.55	3 13/16			1	1		79x97x1.5
32 L 075 TL.1108	5F/S	32	1108	3.82	3.79	4			1	1		82.5x102x1.5
36 L 075 TL.1610	5F/S	36	1610	4.30	4.27	4 1/2			1	1		94x115x1.5
40 L 075 TL.1610	5F/S	40	1610	4.77	4.74	5 1/16			1	1		107x128x1.5
44 L 075 TL.1610	6F/S	44	1610	5.25	5.22	5 9/16			1	1		120x142x1.5
48 L 075 TL.1610	6F/S	48	1610	5.73	5.70	5 7/8	3 5/8	4 3/4	1	1		130x150x1.5
60 L 075 TL.1610	7/C	60	1610	7.16	7.13		3 5/8	6 9/16	1	1		
72 L 075 TL.1610	8/C	72	1610	8.59	8.56		3 5/8	7 15/16	1	1		
84 L 075 TL.2012	4/C	84	2012	10.03	10.00		4 3/16	9 5/16	1 1/4	1	1/8	
96 L 075 TL.2012	4/C	96	2012	11.46	11.43		4 3/16	10 5/8	1 1/4	1	1/8	
120 L 075 TL.2012	4/C	120	2012	14.32	14.29		4 3/16	13 1/2	1 1/4	1	1/8	

*Recommended flange size (I.D. x O.D. x Thickness); steel.

Material: /C = Cast Iron G20 • /S = Steel C40

Note: Pulleys prepared for bushings type 2517 use ANSI Taper-Lock® Bushings with 1/2" x 13tpi UNC threads.



American Metric® Corporation



American (Inch Pitch) Taper-Bushing Synchronous Belt Pulleys



L 100 Pitch 3/8" (9.52 mm)

Part No.	Type/ Mat.	Bushing Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
18 L 100 TL.1108	9F/S	18	1108	2.15	2.12	2 3/8		1 1/2	1 1/4	7/8	3/8	48x60x1.5
19 L 100 TL.1108	9F/S	19	1108	2.27	2.24	2 1/2		1 1/2	1 1/4	7/8	3/8	47x64x1.5
20 L 100 TL.1108	9F/S	20	1108	2.39	2.36	2 5/8		1 3/4	1 1/4	7/8	3/8	53x66.5x1.5
21 L 100 TL.1108	9F/S	21	1108	2.51	2.48	2 3/4		1 3/4	1 1/4	7/8	3/8	53x70x1.5
22 L 100 TL.1108	9F/S	22	1108	2.63	2.60	2 15/16		1 7/8	1 1/4	7/8	3/8	57x75x1.5
23 L 100 TL.1108	9F/S	23	1108	2.75	2.72	3 1/8		2 1/16	1 1/4	7/8	3/8	60x79x1.5
24 L 100 TL.1108	9F/S	24	1108	2.86	2.83	3 1/8		2 1/16	1 1/4	7/8	3/8	60x79x1.5
25 L 100 TL.1108	9F/S	25	1108	2.98	2.95	3 1/4		2 1/8	1 1/4	7/8	3/8	64x82.5x1.5
26 L 100 TL.1108	9F/S	26	1108	3.10	3.07	3 3/8		2 3/8	1 1/4	7/8	3/8	68x86x1.5
27 L 100 TL.1108	9F/S	27	1108	3.22	3.19	3 3/8		2 3/8	1 1/4	7/8	3/8	68x86x1.5
28 L 100 TL.1108	9F/S	28	1108	3.34	3.31	3 9/16		2 9/16	1 1/4	7/8	3/8	73x91x1.5
30 L 100 TL.1210	9F/S	30	1210	3.58	3.55	3 13/16		2 13/16	1 1/4	1	1/4	79x97x1.5
32 L 100 TL.1210	9F/S	32	1210	3.82	3.79	4		2 15/16	1 1/4	1	1/4	82.5x102x1.5
36 L 100 TL.1610	9F/S	36	1610	4.30	4.27	4 1/2		3 3/8	1 1/4	1	1/4	94x115x1.5
40 L 100 TL.1610	9F/S	40	1610	4.77	4.74	5 1/16		3 3/4	1 1/4	1	1/4	107x128x1.5
44 L 100 TL.1610	10F/S	44	1610	5.25	5.22	5 9/16		4 5/16	1 1/4	1	1/4	120x142x1.5
48 L 100 TL.1610	10F/S	48	1610	5.73	5.70	5 7/8	3 5/8	4 3/4	1 1/4	1	1/4	130x150x1.5
60 L 100 TL.1610	11/C	60	1610	7.16	7.13		3 5/8	6 9/16	1 1/4	1		
72 L 100 TL.2012	8/C	72	2012	8.59	8.56		4 3/16	7 15/16	1 1/4	1 1/4		
84 L 100 TL.2012	8/C	84	2012	10.03	10.00		4 3/16	9 5/16	1 1/4	1 1/4		
96 L 100 TL.2012	8/C	96	2012	11.46	11.43		4 3/16	10 5/8	1 1/4	1 1/4		
120 L 100 TL.2012	8/C	120	2012	14.32	14.29		4 3/16	13 1/2	1 1/4	1 1/4		


H 100 Pitch 1/2" (12.7 mm)

Part No.	Type/ Mat.	Bushing Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
16 H 100 TL.1108	9F/S	16	1108	2.55	2.49	2 3/4		1 3/4	1 1/4	7/8	3/8	53x70x1.5
18 H 100 TL.1210	9F/S	18	1210	2.86	2.81	3 1/8		2 1/16	1 1/4	1	1/4	60x79x1.5
19 H 100 TL.1210	9F/S	19	1210	3.02	2.93	3 1/4		2 3/16	1 1/4	1	1/4	64x82.5x1.5
20 H 100 TL.1210	9F/S	20	1210	3.17	3.13	3 7/16		2 3/8	1 1/4	1	1/4	72x87x1.5
21 H 100 TL.1210	9F/S	21	1210	3.34	3.29	3 9/16		2 1/2	1 1/4	1	1/4	73x91x1.5
22 H 100 TL.1210	9F/S	22	1210	3.50	3.45	3 11/16		2 5/8	1 1/4	1	1/4	76x94x1.5
23 H 100 TL.1610	9F/S	23	1610	3.66	3.61	3 13/16		2 3/4	1 1/4	1	1/4	79x97x1.5
24 H 100 TL.1610	9F/S	24	1610	3.82	3.77	4		2 7/8	1 1/4	1	1/4	82.5x102x1.5
25 H 100 TL.1610	9F/S	25	1610	3.98	3.92	4 3/16		3 1/16	1 1/4	1	1/4	86x106x1.5
26 H 100 TL.1610	9F/S	26	1610	4.14	4.08	4 7/16		3 1/4	1 1/4	1	1/4	91x112x1.5
27 H 100 TL.1610	9F/S	27	1610	4.30	4.24	4 1/2		3 3/8	1 1/4	1	1/4	94x115x1.5
28 H 100 TL.1610	9F/S	28	1610	4.46	4.40	4 3/4		3 9/16	1 1/4	1	1/4	99.5x120x1.5
30 H 100 TL.1610	9F/S	30	1610	4.77	4.72	5 1/16		3 7/8	1 1/4	1	1/4	107x128x1.5
32 H 100 TL.1610	10F/S	32	1610	5.09	5.04	5 5/16	3 9/16	4 3/16	1 1/4	1	1/4	115x135x1.5
36 H 100 TL.1610	10F/S	36	1610	5.73	5.68	5 7/8	3 5/8	4 3/4	1 1/4	1	1/4	130x150x1.5
40 H 100 TL.1610	10F/S	40	1610	6.37	6.31	6 5/8	3 5/8	5 7/16	1 1/4	1	1/4	148x168x1.5
44 H 100 TL.2012	6F/S	44	2012	7.00	6.95	7 1/4	4 3/16	6	1 1/4	1 1/4		162x184x1.5
48 H 100 TL.2012	6F/S	48	2012	7.64	7.59	7 7/8	4 3/16	6 5/8	1 1/4	1 1/4		
60 H 100 TL.2012	12/C	60	2012	9.55	9.50		4 3/16	8 3/4	1 5/16	1 1/4	1/16	
72 H 100 TL.2012	12/C	72	2012	11.46	11.41		4 3/16	10 5/8	1 5/16	1 1/4	1/16	
84 H 100 TL.2012	12/C	84	2012	13.37	13.31		4 3/16	12 1/2	1 5/16	1 1/4	1/16	
96 H 100 TL.2517 ANSI	4/C	96	2517	15.28	15.22		4 11/16	14 7/16	1 5/16	1 3/4	3/16	
120 H 100 TL.2517 ANSI	4/C	120	2517	19.10	19.04		4 11/16	18 1/4	1 5/16	1 3/4	3/16	

*Recommended flange size (I.D. x O.D. x Thickness); steel.

Material: /C = Cast Iron G20 • /S = Steel C40

Note: Pulleys prepared for bushings type 2517 use ANSI Taper-Lock® Bushings with 1/2" x 13tpi UNC threads.



American Metric® Corporation

GROUP: 082

1-082-050104



American (Inch Pitch) Taper-Bushing Synchronous Belt Pulleys



H 150 Pitch 1/2" (12.7 mm)

Part No.	Type/ Mat.	Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
18 H 150 TL.1210	9F/S	18	1210	2.86	2.81	3 1/8		2 1/16	1 3/4	1	13/16	60x79x1.5
19 H 150 TL.1210	9F/S	19	1210	3.02	2.93	3 1/4		2 3/16	1 3/4	1	13/16	64x82.5x1.5
20 H 150 TL.1210	9F/S	20	1210	3.17	3.13	3 7/16		2 3/8	1 3/4	1	13/16	72x87x1.5
21 H 150 TL.1210	9F/S	21	1210	3.34	3.29	3 9/16		2 1/2	1 3/4	1	13/16	73x91x1.5
22 H 150 TL.1210	9F/S	22	1210	3.50	3.45	3 11/16		2 5/8	1 3/4	1	13/16	76x94x1.5
23 H 150 TL.1610	9F/S	23	1610	3.66	3.61	3 13/16		2 3/4	1 3/4	1	13/16	79x97x1.5
24 H 150 TL.1610	9F/S	24	1610	3.82	3.77	4		2 7/8	1 3/4	1	13/16	82.5x102x1.5
25 H 150 TL.1610	9F/S	25	1610	3.98	3.92	4 3/16		3 1/16	1 3/4	1	13/16	86x106x1.5
26 H 150 TL.1610	9F/S	26	1610	4.14	4.08	4 7/16		3 1/4	1 3/4	1	13/16	91x112x1.5
27 H 150 TL.1610	9F/S	27	1610	4.30	4.24	4 1/2		3 3/8	1 3/4	1	13/16	94x115x1.5
28 H 150 TL.1610	9F/S	28	1610	4.46	4.40	4 3/4		3 9/16	1 3/4	1	13/16	99.5x120x1.5
30 H 150 TL.1610	9F/S	30	1610	4.77	4.72	5 1/16		3 7/8	1 3/4	1	13/16	107x128x1.5
32 H 150 TL.1610	10F/S	32	1610	5.09	5.04	5 5/16	3 9/16	4 3/16	1 3/4	1	13/16	115x135x1.5
36 H 150 TL.1610	10F/S	36	1610	5.73	5.68	5 7/8	3 5/8	4 3/4	1 3/4	1	13/16	130x150x1.5
40 H 150 TL.1610	10F/S	40	1610	6.37	6.31	6 5/8	3 5/8	5 7/16	1 3/4	1	13/16	148x168x1.5
44 H 150 TL.2012	10F/S	44	2012	7.00	6.95	7 1/4	4 3/16	6	1 3/4	1 1/4	1/2	162x184x1.5
48 H 150 TL.2012	10F/S	48	2012	7.64	7.59	7 7/8	4 3/16	6 5/8	1 3/4	1 1/4	1/2	180x200x1.5
60 H 150 TL.2012	12/C	60	2012	9.55	9.50		4 3/16	8 3/4	1 13/16	1 1/4	1/4	
72 H 150 TL.2012	12/C	72	2012	11.46	11.41		4 3/16	10 5/8	1 13/16	1 1/4	1/4	
84 H 150 TL.2012	12/C	84	2012	13.37	13.31		4 3/16	12 5/8	1 13/16	1 1/4	1/4	
96 H 150 TL.2517 ANSI	12/C	96	<u>2517</u>	15.28	15.22		4 11/16	14 7/16	1 13/16	1 3/4		
120 H 150 TL.2517 ANSI	12/C	120	<u>2517</u>	19.10	19.04		4 11/16	18 3/16	1 13/16	1 3/4		

H 200 Pitch 1/2" (12.7 mm)

Part No.	Type/ Mat.	Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
18 H 200 TL.1210	9F/S	18	1210	2.86	2.81	3 1/8		2 1/16	2 5/16	1	1 5/16	60x79x1.5
19 H 200 TL.1210	9F/S	19	1210	3.02	2.93	3 1/4		2 3/16	2 5/16	1	1 5/16	64x82.5x1.5
20 H 200 TL.1610	9F/S	20	1610	3.17	3.13	3 7/16		2 3/8	2 5/16	1	1 5/16	72x87x1.5
21 H 200 TL.1610	9F/S	21	1610	3.34	3.29	3 9/16		2 1/2	2 5/16	1	1 5/16	73x91x1.5
22 H 200 TL.1610	9F/S	22	1610	3.50	3.45	3 11/16		2 5/8	2 5/16	1	1 5/16	76x94x1.5
23 H 200 TL.1610	9F/S	23	1610	3.66	3.61	3 13/16		2 3/4	2 5/16	1	1 5/16	79x97x1.5
24 H 200 TL.1610	9F/S	24	1610	3.82	3.77	4		2 7/8	2 5/16	1	1 5/16	82.5x102x1.5
25 H 200 TL.1610	9F/S	25	1610	3.98	3.92	4 3/16		3 1/16	2 5/16	1	1 5/16	86x106x1.5
26 H 200 TL.1610	9F/S	26	1610	4.14	4.08	4 7/16		3 1/4	2 5/16	1	1 5/16	91x112x1.5
27 H 200 TL.1610	9F/S	27	1610	4.30	4.24	4 1/2		3 3/8	2 5/16	1	1 5/16	94x115x1.5
28 H 200 TL.1610	9F/S	28	1610	4.46	4.40	4 3/4		3 9/16	2 5/16	1	1 5/16	99.5x120x1.5
30 H 200 TL.1610	9F/S	30	1610	4.77	4.72	5 1/16		3 7/8	2 5/16	1	1 5/16	107x128x1.5
32 H 200 TL.2012	9F/S	32	2012	5.09	5.04	5 5/16		4 3/16	2 5/16	1 1/4	1	115x135x1.5
36 H 200 TL.2012	10F/S	36	2012	5.73	5.68	5 7/8	4	4 3/4	2 5/16	1 1/4	1	130x150x1.5
40 H 200 TL.2012	10F/S	40	2012	6.37	6.31	6 5/8	4 3/16	5 7/16	2 5/16	1 1/4	1	148x168x1.5
44 H 200 TL.2012	10F/S	44	2012	7.00	6.95	7 1/4	4 3/16	6	2 5/16	1 1/4	1	162x184x1.5
48 H 200 TL.2517 ANSI	10F/S	48	<u>2517</u>	7.64	7.59	7 7/8	4 11/16	6 5/8	2 5/16	1 3/4	1/2	180x200x1.5
60 H 200 TL.2517 ANSI	12/C	60	<u>2517</u>	9.55	9.50		4 11/16	8 3/4	2 3/8	1 3/4	5/16	
72 H 200 TL.2517 ANSI	12/C	72	<u>2517</u>	11.46	11.41		4 11/16	10 5/8	2 3/8	1 3/4	5/16	
84 H 200 TL.2517 ANSI	12/C	84	<u>2517</u>	13.37	13.31		4 11/16	12 5/8	2 3/8	1 3/4	5/16	
96 H 200 TL.2517 ANSI	12/C	96	<u>2517</u>	15.28	15.22		4 11/16	14 7/16	2 3/8	1 3/4	5/16	
120 H 200 TL.2517 ANSI	12/C	120	<u>2517</u>	19.10	19.04		4 11/16	18 3/16	2 3/8	1 3/4	5/16	

*Recommended flange size (I.D. x O.D. x Thickness); steel.

Material: /C = Cast Iron G20 • /S = Steel C40

Note: Pulleys prepared for bushings type 2517 use ANSI Taper-Lock® Bushings with 1/2" x 13tpi UNC threads.



American (Inch Pitch) Taper-Bushing Synchronous Belt Pulleys




H 300 Pitch 1/2" (12.7 mm)

Part No.	Type/ Mat.	Teeth	Bushing No.	Dp	De	Approx. Df	Approx. Dm	Approx. Di	Approx. F	Approx. S	Approx. R	Flange Size*
20 H 300 TL.1615	13F/S	20	1615	3.18	3.13	3 7/16		2 9/16	3 5/16	1 1/2	7/8	72x87x1.5
21 H 300 TL.1615	13F/S	21	1615	3.34	3.29	3 9/16		2 9/16	3 5/16	1 1/2	7/8	73x91x1.5
22 H 300 TL.1615	13F/S	22	1615	3.50	3.45	3 11/16		2 5/8	3 5/16	1 1/2	7/8	76x94x1.5
23 H 300 TL.1615	13F/S	23	1615	3.66	3.61	3 13/16		2 3/4	3 5/16	1 1/2	7/8	79x97x1.5
24 H 300 TL.1615	13F/S	24	1615	3.82	3.77	4		2 7/8	3 5/16	1 1/2	7/8	82.5x102x1.5
25 H 300 TL.1615	13F/S	25	1615	3.98	3.92	4 3/16		3 1/16	3 5/16	1 1/2	7/8	86x106x1.5
26 H 300 TL.1615	13F/S	26	1615	4.14	4.08	4 7/16		3 1/4	3 5/16	1 1/2	7/8	91x112x1.5
27 H 300 TL.2012	13F/S	27	2012	4.30	4.24	4 1/2		3 3/8	3 5/16	1 1/4	1	94x115x1.5
28 H 300 TL.2012	13F/S	28	2012	4.46	4.40	4 3/4		3 9/16	3 5/16	1 1/4	1	99.5x120x1.5
30 H 300 TL.2012	13F/S	30	2012	4.77	4.72	5 1/16		3 7/8	3 5/16	1 1/4	1	107x128x1.5
32 H 300 TL.2517 ANSI	13F/S	32	<u>2517</u>	5.09	5.04	5 5/16		4 3/16	3 5/16	1 3/4	3/4	115x135x1.5
36 H 300 TL.2517 ANSI	13F/S	36	<u>2517</u>	5.73	5.68	5 7/8		4 3/4	3 5/16	1 3/4	3/4	130x150x1.5
40 H 300 TL.2517 ANSI	13F/S	40	<u>2517</u>	6.37	6.31	6 5/8		5 7/16	3 5/16	1 3/4	3/4	148x168x1.5
44 H 300 TL.2517 ANSI	14F/S	44	<u>2517</u>	7.00	6.95	7 1/4	4 11/16	6	3 3/8	1 3/4	13/16	162x184x1.5
48 H 300 TL.2517 ANSI	14F/S	48	<u>2517</u>	7.64	7.59	7 7/8	4 11/16	6 5/8	3 3/8	1 3/4	13/16	180x200x1.5
60 H 300 TL.2517 ANSI	12/C	60	<u>2517</u>	9.55	9.50		4 11/16	8 3/4	3 3/8	1 3/4	13/16	
72 H 300 TL.2517 ANSI	12/C	72	<u>2517</u>	11.46	11.41		4 11/16	10 5/8	3 3/8	1 3/4	13/16	
84 H 300 TL.2517 ANSI	12/C	84	<u>2517</u>	13.37	13.31		4 11/16	12 5/8	3 3/8	1 3/4	13/16	
96 H 300 TL.3030	12/C	96	3030	15.28	15.22		5 7/8	14 1/4	3 3/8	3	3/16	
120 H 300 TL.3030	12/C	120	3030	19.10	19.04		5 7/8	18 1/8	3 3/8	3	3/16	

*Recommended flange size (I.D. x O.D. x Thickness); steel.

Material: /C = Cast Iron G20 • /S = Steel C40

Note: Pulleys prepared for bushings type 2517 use ANSI Taper-Lock® Bushings with 1/2" x 13tpi UNC threads.



American Metric® Corporation

GROUP: 082

1-082-