
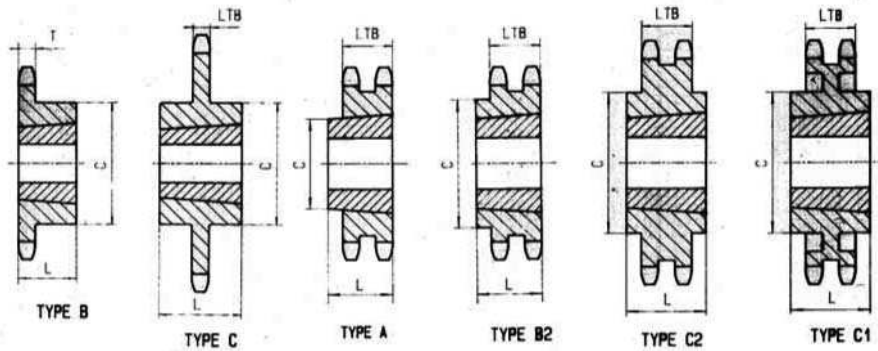


American Standard (ANSI) Taper-Bush Sprockets



SINGLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
3/8 X 3/16	35TL18	18	1008	2.352	2.159	1	7/8	1 7/8	B	0.40	0.30
	35TL19	19	1008	2.472	2.278	1	7/8	1 13/16	B	0.50	0.30
	35TL20	20	1008	2.593	2.397	1	7/8	1 15/16	B	0.60	0.30
	35TL21	21	1008	2.713	2.516	1	7/8	2 1/16	B	0.70	0.30
	35TL22	22	1210	2.883	2.635	1 1/4	1	2 3/8	B	0.80	0.60
	35TL23	23	1210	2.954	2.754	1 1/4	1	2 7/16	B	0.90	0.60
	35TL24	24	1210	3.074	2.873	1 1/4	1	2 7/16	B	0.90	0.60
	35TL25	25	1210	3.194	2.992	1 1/4	1	2 7/16	B	1.20	0.60
	35TL26	26	1610	3.314	3.111	1 5/8	1	2 7/8	B	1.10	0.90
	35TL28	28	1610	3.553	3.349	1 5/8	1	2 7/8	B	1.20	0.90
	35TL30	30	1610	3.793	3.588	1 5/8	1	3 1/8	B	1.20	0.90
	35TL32	32	1610	4.032	3.826	1 5/8	1	3 1/4	B	1.30	0.90
	35TL35	35	1610	4.392	4.183	1 5/8	1	3 1/4	B	1.40	0.90
	35TL36	36	1610	4.511	4.303	1 5/8	1	3 1/4	B	1.40	0.90
	35TL40	40	1610	4.990	4.786	1 5/8	1	3 1/4	B	1.90	0.90
	35TL42	42	1610	5.229	5.018	1 5/8	1	3 1/4	B	2.00	0.90
	35TL45	45	1610	5.588	5.376	1 5/8	1	3 1/4	B	2.10	0.90
	35TL48	48	1610	5.946	5.734	1 5/8	1	3 1/4	B	2.30	0.90
	35TL54	54	1610	6.663	6.449	1 5/8	1	3 1/4	B	2.60	0.90
	35TL60	60	1610	7.380	7.165	1 5/8	1	3 1/4	B	3.00	0.90
	35TL70	70	1610	8.575	8.358	1 5/8	1	3 1/4	B	3.70	0.90
1/2 X 5/16	35TL72	72	1610	8.814	8.597	1 5/8	1	3 1/4	B	3.90	0.90
	35TL80	80	1610	9.770	9.552	1 5/8	1	3 1/4	B	4.50	0.90
	35TL84	84	1610	10.247	10.029	1 5/8	1	3 1/4	B	4.90	0.90
	35TL96	96	1610	11.680	11.461	1 5/8	1	3 1/4	B	6.00	0.90
	35TL112	112	1610	13.590	13.371	1 5/8	1	3 1/4	B	7.80	0.90
	40TL14	14	1008	2.491	2.247	1	7/8	1 13/16	B	0.30	0.30
	40TL15	15	1008	2.652	2.405	1	7/8	1 13/16	B	0.40	0.30
	40TL16	16	1008	2.814	2.563	1	7/8	1 15/16	B	0.50	0.30
	40TL17	17	1210	2.975	2.721	1 1/4	1	2 3/8	B	0.50	0.60
	40TL18	18	1210	3.135	2.879	1 1/4	1	2 15/32	B	0.60	0.60
	40TL19	19	1210	3.296	3.038	1 1/4	1	2 15/32	B	0.70	0.60
	40TL20	20	1610	3.457	3.196	1 5/8	1	2 25/32	B	0.70	0.90
	40TL21	21	1610	3.617	3.355	1 5/8	1	2 25/32	B	0.80	0.90
	40TL22	22	1610	3.778	3.513	1 5/8	1	2 25/32	B	0.90	0.90
	40TL23	23	1610	3.938	3.672	1 5/8	1	3	B	1.00	0.90
	40TL24	24	1610	4.098	3.831	1 5/8	1	3 1/4	B	1.40	0.90
	40TL25	25	1610	4.258	3.989	1 5/8	1	3 1/4	B	1.50	0.90
	40TL26	26	1610	4.418	4.148	1 5/8	1	3 1/4	B	1.70	0.90
	40TL28	28	1610	4.738	4.466	1 5/8	1	3	B	1.80	0.90
	40TL30	30	1610	5.057	4.783	1 5/8	1	3	B	1.90	0.90
	40TL32	32	1610	5.377	5.101	1 5/8	1	3	B	1.90	0.90
	40TL35	35	1610	5.855	5.578	1 5/8	1	3	B	2.30	0.90
	40TL36	36	1610	6.015	5.737	1 5/8	1	3	B	2.40	0.90
	40TL40	40	1610	6.653	6.373	1 5/8	1	3	B	2.80	0.90
	40TL42	42	1610	6.972	6.691	1 5/8	1	3	B	2.90	0.90
	40TL45	45	1610	7.451	7.168	1 5/8	1	3	B	3.50	0.90
	40TL48	48	1610	7.928	7.645	1 5/8	1	3	B	4.00	0.90
	40TL54	54	1610	8.885	8.599	1 5/8	1	3	B	4.90	0.90
	40TL60	60	1610	9.841	9.554	1 5/8	1	3	B	6.00	0.90
	40TL70	70	2012	11.434	11.145	2	1 1/4	3 9/16	B	8.20	1.70
	40TL72	72	2012	11.752	11.463	2	1 1/4	3 9/16	B	9.00	1.70
	40TL80	80	2012	13.026	12.736	2	1 1/4	3 9/16	B	10.80	1.70



Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.

 **American Metric® Corporation**

GROUP: 098

1-098-060223

American Standard (ANSI) Taper-Bush Sprockets

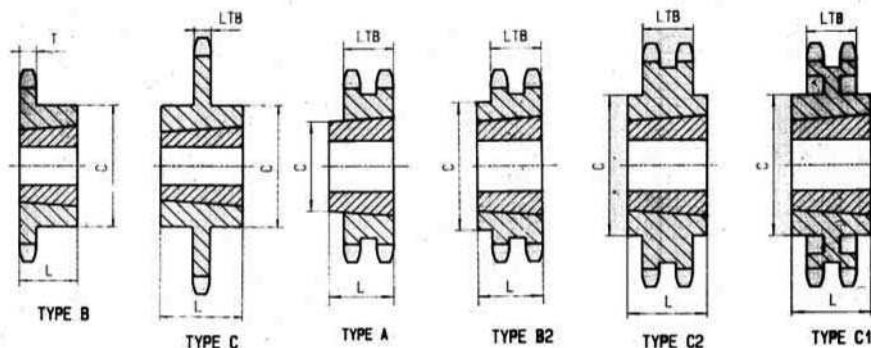


SINGLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
1/2 X 5/16	40TL84	84	2012	13.663	13.372	2	1 1/4	3 9/16	B	11.30	1.70
	40TL96	96	2012	15.573	15.282	2	1 1/4	3 9/16	B	14.60	1.70
	40TL112	112	2517	18.122	17.828	2 1/2	1 3/4	4 1/4	B	20.50	1.70
1/2 X 1/4	41TL14	14	1008	2.49	2.249	1	7/8	1 7/8	B	0.40	0.30
	41TL15	15	1008	2.65	2.405	1	7/8	1 7/8	B	0.50	0.30
	41TL16	16	1008	2.81	2.503	1	7/8	2	B	0.60	0.30
	41TL17	17	1210	2.98	2.721	1 1/4	1	2 3/8	B	0.70	0.60
	41TL18	18	1210	3.14	2.879	1 1/4	1	2 3/8	B	0.90	0.60
	41TL19	19	1210	3.30	3.038	1 1/4	1	2 1/2	B	1.10	0.60
	41TL20	20	1610	3.46	3.196	1 5/8	1	2 7/8	B	1.10	0.90
	41TL21	21	1610	3.62	3.355	1 5/8	1	3	B	1.20	0.90
	41TL22	22	1610	3.78	3.573	1 5/8	1	3	B	1.30	0.90
	41TL23	23	1610	3.94	3.672	1 5/8	1	3	B	1.40	0.90
	41TL24	24	1610	4.10	3.831	1 5/8	1	3 1/4	B	1.40	0.90
	41TL25	25	1610	4.26	3.989	1 5/8	1	3 1/4	B	1.50	0.90
	41TL26	26	1610	4.42	4.148	1 5/8	1	3 1/4	B	1.50	0.90
	41TL28	28	1610	4.74	4.466	1 5/8	1	3 1/4	B	1.70	0.90
	41TL30	30	1610	5.06	4.783	1 5/8	1	3 1/4	B	1.80	0.90
	41TL32	32	1610	5.38	5.101	1 5/8	1	3 1/4	B	1.90	0.90
	41TL35	35	1610	5.86	5.578	1 5/8	1	3 1/4	B	2.30	0.90
	41TL36	36	1610	6.02	5.737	1 5/8	1	3 1/4	B	2.40	0.90
	41TL40	40	1610	6.65	6.373	1 5/8	1	3 1/4	B	2.70	0.90
	41TL45	45	1610	7.45	7.168	1 5/8	1	3 1/4	B	3.50	0.90
	41TL48	48	1610	7.93	7.645	1 5/8	1	3 1/4	B	4.10	0.90
	41TL54	54	1610	8.89	8.599	1 5/8	1	3 1/4	B	4.90	0.90
	41TL60	60	1610	9.84	9.554	1 5/8	1	3 1/4	B	5.70	0.90
	41TL70	70	1610	11.43	11.145	1 5/8	1	3 1/4	B	7.40	0.90
	41TL72	72	1610	11.75	11.463	1 5/8	1	3 1/4	B	8.20	0.90
	41TL80	80	1610	13.03	12.736	1 5/8	1	3 1/4	B	9.60	0.90
	41TL96	96	1610	15.57	15.281	1 5/8	1	3 1/4	B	13.10	0.90
5/8 X 3/8	50TL12	12	1008	2.708	2.415	1	7/8	1 15/16	B	0.50	0.30
	50TL13	13	1008	2.911	2.612	1	7/8	1 15/16	B	0.50	0.30
	50TL14	14	1008	3.113	2.809	1	7/8	1 15/16	B	0.60	0.30
	50TL15	15	1210	3.315	3.006	1 1/4	1	2 15/32	B	0.70	0.60
	50TL16	16	1610	3.517	3.204	1 5/8	1	2 25/32	B	0.70	0.90
	50TL17	17	1610	3.719	3.401	1 5/8	1	2 25/32	B	0.80	0.90
	50TL18	18	1610	3.920	3.599	1 5/8	1	2 25/32	B	0.90	0.90
	50TL19	19	1610	4.120	3.797	1 5/8	1	3	B	1.30	0.90
	50TL20	20	1610	4.321	3.995	1 5/8	1	3 1/4	B	1.60	0.90
	50TL21	21	1610	4.522	4.193	1 5/8	1	3	B	1.50	0.90
	50TL22	22	1610	4.722	4.392	1 5/8	1	3	B	1.60	0.90
	50TL23	23	2012	4.862	4.590	2	1 1/4	3 9/16	B	2.00	1.70
	50TL24	24	2012	5.122	4.788	2	1 1/4	3 9/16	B	2.20	1.70
	50TL25	25	2012	5.322	4.987	2	1 1/4	3 9/16	B	2.40	1.70
	50TL26	26	2012	5.522	5.185	2	1 1/4	3 9/16	B	2.50	1.70
	50TL27	27	2012	5.723	5.384	2	1 1/4	3 9/16	B	2.60	1.70
	50TL28	28	2012	5.922	5.582	2	1 1/4	3 9/16	B	2.80	1.70
	50TL30	30	2012	6.321	5.979	2	1 1/4	3 9/16	B	3.20	1.70
	50TL32.2517	42	2012	8.693	8.363	2	1 1/4	3 9/16	B2	3.60	1.70
	50TL35	35	2012	7.319	6.972	2	1 1/4	3 9/16	B	4.20	1.70

Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.


American Standard (ANSI) Taper-Bush Sprockets

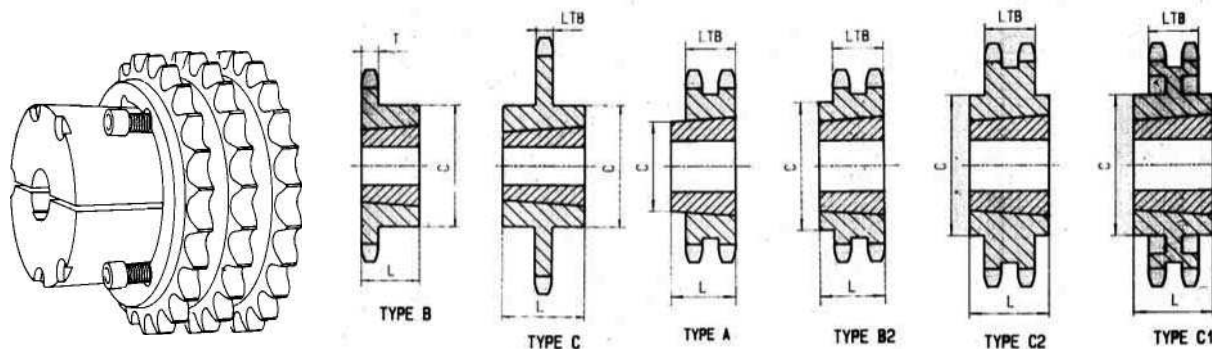

SINGLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
5/8 X 3/8	50TL36	36	2012	7.519	7.171	2	1 1/4	3 9/16	B	4.30	1.70
	50TL40	40	2012	8.316	7.966	2	1 1/4	3 9/16	B	5.20	1.70
	50TL42	42	2012	8.715	8.363	2	1 1/4	3 9/16	B	5.90	1.70
	50TL45	45	2012	9.313	8.960	2	1 1/4	3 9/16	B	6.50	1.70
	50TL48	48	2012	9.911	9.556	2	1 1/4	3 9/16	B	7.30	1.70
	50TL54	54	2012	11.106	10.749	2	1 1/4	3 9/16	B	9.00	1.70
	50TL60	60	2012	12.301	11.942	2	1 1/4	3 9/16	B	10.80	1.70
	50TL70	70	2517	14.292	13.931	2 1/2	1 3/4	4 1/4	B	14.00	3.50
	50TL72	72	2517	14.690	14.329	2 1/2	1 3/4	4 1/4	B	15.50	3.50
	50TL80	80	2517	16.282	15.920	2 1/2	1 3/4	4 1/4	B	19.50	3.50
	50TL84	84	2517	17.079	16.715	2 1/2	1 3/4	4 1/4	B	22.50	3.50
	50TL96	96	2517	19.466	19.102	2 1/2	1 3/4	4 1/4	B	29.00	3.50
	50TL112	112	2517	22.651	22.285	2 1/2	1 3/4	4 1/4	B	38.70	3.50
3/4 X 1/2	60TL11	11	1008	3.004	2.662	1	7/8	1 13/16	B	0.60	0.30
	60TL12	12	1008	3.249	2.898	1	7/8	1 15/16	B	0.80	0.30
	60TL13	13	1210	3.493	3.134	1 1/4	1	2 15/32	B	0.80	0.60
	60TL14	14	1210	3.736	3.371	1 1/4	1	2 15/32	B	1.00	0.60
	60TL15	15	1610	3.979	3.607	1 5/8	1	2 25/32	B	1.00	0.90
	60TL16	16	1610	4.221	3.844	1 5/8	1	3	B	1.40	0.90
	60TL17	17	1610	4.462	4.082	1 5/8	1	3 1/4	B	1.80	0.90
	60TL18	18	1610	4.704	4.319	1 5/8	1	3 1/4	B	1.90	0.90
	60TL19	19	1610	4.945	4.557	1 5/8	1	3 1/4	B	2.20	0.90
	60TL20	20	2012	5.185	4.794	2	1 1/4	3 9/16	B	2.20	1.70
	60TL21	21	2012	5.426	5.032	2	1 1/4	3 9/16	B	2.50	1.70
	60TL22	22	2012	5.666	5.270	2	1 1/4	3 9/16	B	2.80	1.70
	60TL23	23	2012	5.907	5.508	2	1 1/4	3 9/16	B	3.10	1.70
	60TL24	24	2012	6.147	5.746	2	1 1/4	3 9/16	B	3.40	1.70
	60TL25	25	2012	6.387	5.984	2	1 1/4	3 9/16	B	3.70	1.70
	60TL26	26	2012	6.627	6.222	2	1 1/4	3 9/16	B	4.00	1.70
	60TL27	27	2012	6.867	6.416	2	1 1/4	3 9/16	B	4.20	1.70
	60TL28	28	2012	7.107	6.699	2	1 1/4	3 9/16	B	4.60	1.70
	60TL30	30	2012	7.586	7.175	2	1 1/4	3 9/16	B	5.20	1.70
	60TL32	32	2012	8.065	7.652	2	1 1/4	3 9/16	B	5.60	1.70
	60TL35	35	2012	8.783	8.367	2	1 1/4	3 9/16	B	6.40	1.70
	60TL36	36	2012	9.022	8.605	2	1 1/4	3 9/16	B	6.60	1.70
	60TL40	40	2012	9.980	9.559	2	1 1/4	3 9/16	B	8.30	1.70
	60TL42	42	2012	10.458	10.036	2	1 1/4	3 9/16	B	10.50	1.70
	60TL45	45	2012	11.175	10.752	2	1 1/4	3 9/16	B	11.50	1.70
	60TL48	48	2012	11.893	11.467	2	1 1/4	3 9/16	B	13.20	1.70
	60TL54	54	2517	13.327	12.899	2 1/2	1 3/4	4 1/4	B	17.10	3.50
	60TL60	60	2517	14.761	14.330	2 1/2	1 3/4	4 1/4	B	21.00	3.50
	60TL70	70	2517	17.150	16.717	2 1/2	1 3/4	4 1/4	B	27.60	3.50
	60TL72	72	2517	17.628	17.194	2 1/2	1 3/4	4 1/4	B	30.00	3.50
	60TL80	80	2517	19.539	19.103	2 1/2	1 3/4	4 1/4	B	36.30	3.50
	60TL84	84	2517	20.494	20.058	2 1/2	1 3/4	4 1/4	B	40.60	3.50
1 X 5/8	80TL10	10	1215	3.678	3.236	1 1/4	1 1/2	2 3/8	B	1.10	0.80
	80TL11	11	1215	4.006	3.549	1 1/4	1 1/2	2 15/32	B	1.50	0.80
	80TL12	12	1615	4.332	3.864	1 5/8	1 1/2	3	B	1.80	1.20
	80TL13	13	1615	4.634	4.179	1 5/8	1 1/2	3	B	2.30	1.20
	80TL14	14	1615	4.982	4.494	1 5/8	1 1/2	3 1/4	B	2.50	1.20

Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.





American Metric® Corporation


GROUP: 098

1-098-050103

American Standard (ANSI) Taper-Bush Sprockets



TYPE B




TYPE C




TYPE A



TYPE B2



TYPE C2





TYPE C1

SINGLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
1 X 5/8	80TL15	15	1615	5.305	4.810	1 5/8	1 1/2	3 1/4	B	2.70	1.20
	80TL16	16	2012	5.627	5.126	2	1 1/4	3 9/16	B	2.80	1.70
	80TL17	17	2012	5.950	5.442	2	1 1/4	3 9/16	B	3.10	1.70
	80TL18	18	2012	6.271	5.759	2	1 1/4	3 9/16	B	3.60	1.70
	80TL19	19	2012	6.593	6.076	2	1 1/4	3 9/16	B	4.10	1.70
	80TL20	20	2517	6.914	6.392	2 1/2	1 3/4	4 1/4	B	5.50	3.50
	80TL21	21	2517	7.235	6.710	2 1/2	1 3/4	4 1/4	B	6.00	3.50
	80TL22	22	2517	7.555	7.027	2 1/2	1 3/4	4 1/4	B	6.50	3.50
	80TL23	23	2517	7.875	7.344	2 1/2	1 3/4	4 1/4	B	7.00	3.50
	80TL24	24	2517	8.196	7.661	2 1/2	1 3/4	4 1/4	B	7.50	3.50
	80TL25	25	2517	8.516	7.979	2 1/2	1 3/4	4 1/4	B	8.10	3.50
	80TL26	26	2517	8.836	8.296	2 1/2	1 3/4	4 1/4	B	8.80	3.50
	80TL27	27	2517	9.156	8.614	2 1/2	1 3/4	4 1/4	B	9.00	3.50
	80TL28	28	2517	9.475	8.931	2 1/2	1 3/4	4 1/4	B	9.50	3.50
	80TL30	30	2517	10.114	9.567	2 1/2	1 3/4	4 1/4	B	11.50	3.50
	80TL32	32	2517	10.753	10.202	2 1/2	1 3/4	4 1/4	B	12.00	3.50
	80TL35	35	2517	11.711	11.156	2 1/2	1 3/4	4 1/4	B	15.20	3.50
	80TL36	36	2517	12.030	11.474	2 1/2	1 3/4	4 1/4	B	17.00	3.50
	80TL40	40	2517	13.306	12.746	2 1/2	1 3/4	4 1/4	B	21.00	3.50
	80TL45	45	2517	14.901	14.336	2 1/2	1 3/4	4 1/4	B	26.50	3.50
	80TL48	48	2517	15.857	15.290	2 1/2	1 3/4	4 1/4	B	29.50	3.50
	80TL54	54	2517	17.769	17.198	2 1/2	1 3/4	4 1/4	B	38.50	3.50
	80TL60	60	2517	19.681	19.107	2 1/2	1 3/4	4 1/4	B	45.00	3.50
	80TL70	70	3020	22.867	22.289	3	2	5 1/4	B	52.30	6.50
	80TL80	80	3020	26.052	25.471	3	2	5 1/4	B	69.20	6.50
1 1/4 X 3/4	100TL11	11	1615	5.007	4.437	1 5/8	1 1/2	3	B	2.70	1.20
	100TL12	12	1615	5.415	4.830	1 5/8	1 1/2	3 1/4	B	3.50	1.20
	100TL13	13	2012	5.821	5.223	2	1 1/4	3 9/16	B	3.60	1.70
	100TL14	14	2012	6.227	5.617	2	1 1/4	3 9/16	B	3.90	1.70
	100TL15	15	2517	6.631	6.012	2 1/2	1 3/4	4 1/4	B	5.00	3.50
	100TL16	16	2517	7.034	6.407	2 1/2	1 3/4	4 1/2	B	6.40	3.50
	100TL17	17	2517	7.437	6.803	2 1/2	1 3/4	4 1/2	B	7.10	3.50
	100TL18	18	2517	7.839	7.198	2 1/2	1 3/4	4 1/2	B	7.80	3.50
	100TL19	19	2517	8.241	7.594	2 1/2	1 3/4	4 1/2	B	8.70	3.50
	100TL20	20	2517	8.642	7.991	2 1/2	1 3/4	4 1/2	B	9.60	3.50
	100TL21	21	2517	9.042	8.387	2 1/2	1 3/4	4 1/2	B	10.60	3.50
	100TL22	22	2517	9.444	8.783	2 1/2	1 3/4	4 1/2	B	11.00	3.50
	100TL24	24	2517	10.245	9.577	2 1/2	1 3/4	4 1/2	B	13.00	3.50
	100TL26	26	2517	11.045	10.370	2 1/2	1 3/4	4 1/2	B	15.00	3.50
	100TL28	28	3020	11.844	11.164	3	2	5 1/4	B	16.50	6.50
	100TL30	30	3020	12.643	11.958	3	2	5 1/4	B	22.00	6.50
	100TL32	32	3020	13.442	12.753	3	2	5 1/4	B	23.00	6.50
	100TL35	35	3020	14.639	13.945	3	2	5 1/4	B	28.00	6.50
	100TL36	36	3020	15.038	14.342	3	2	5 1/4	B	31.00	6.50
	100TL40	40	3020	16.633	15.932	3	2	5 1/4	B	37.00	6.50
	100TL45	45	3020	18.626	17.919	3	2	5 1/4	B	46.00	6.50
	100TL48	48	3020	19.821	19.112	3	2	5 1/4	B	53.00	6.50
	100TL54	54	3020	22.212	21.498	3	2	5 1/4	B	62.00	6.50
	100TL60	60	3020	24.601	23.884	3	2	5 1/4	B	72.00	6.50
	120TL12	12	2012	6.498	5.796	2	1 1/4	3 9/16	B	5.50	1.70

Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.


American Standard (ANSI) Taper-Bush Sprockets

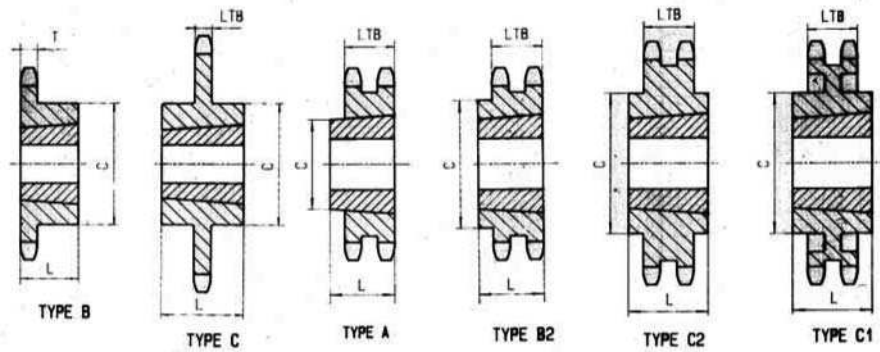

SINGLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
1 1/2 X 1	120TL13	13	2517	6.896	6.268	2 1/2	1 3/4	4 1/4	B	6.00	3.50
	120TL14	14	2517	7.472	6.741	2 1/2	1 3/4	4 1/4	B	7.00	3.50
	120TL15	15	2517	7.957	7.215	2 1/2	1 3/4	4 1/4	B	8.00	3.50
	120TL16	16	3020	8.441	7.689	3	2	5 1/4	B	10.00	6.50
	120TL17	17	3020	8.924	8.163	3	2	5 1/4	B	11.00	6.50
	120TL18	18	3020	9.407	8.638	3	2	5 1/4	B	12.00	6.50
	120TL19	19	3020	9.889	9.113	3	2	5 1/4	B	14.00	6.50
	120TL20	20	3020	10.371	9.588	3	2	5 1/4	B	15.50	6.50
	120TL21	21	3020	10.851	10.064	3	2	5 1/4	B	17.50	6.50
	120TL24	24	3020	12.294	11.492	3	2	5 1/4	B	23.50	6.50
	120TL26	26	3020	13.254	12.444	3	2	5 1/4	B	28.50	6.50
	120TL30	30	3020	15.171	14.351	3	2	5 1/4	B	33.50	6.50
	120TL35	35	3020	17.566	16.734	3	2	5 1/4	C	52.00	6.50
	120TL45	45	3030	22.351	21.503	3	3	5 7/8	C	82.00	6.50
	120TL60	60	3535	29.522	28.661	3 1/2	3 1/2	6 1/2	C	140.00	14.00
	120TL70	70	3535	34.301	33.434	3 1/2	3 1/2	6 1/2	C	175.00	14.00
	120TL80	80	3535	39.078	38.207	3 1/2	3 1/2	6 1/2	C	220.00	14.00
1 3/4 X 1	140TL12	12	2517	7.581	6.762	2 1/2	1 3/4	4 1/4	B	7.00	3.50
	140TL13	13	3020	8.150	7.313	3	2	5 1/4	B	8.00	6.50
	140TL14	14	3020	8.718	7.864	3	2	5 1/4	B	10.00	6.50
	140TL15	15	3020	9.283	8.417	3	2	5 1/4	B	12.00	6.50
	140TL16	16	3020	9.848	8.970	3	2	5 1/4	B	14.00	6.50
	140TL17	17	3020	10.411	9.524	3	2	5 1/4	B	16.00	6.50
	140TL18	18	3020	10.975	10.078	3	2	5 1/4	B	18.00	6.50
	140TL19	19	3020	11.537	10.632	3	2	5 1/4	B	20.00	6.50
	140TL21	21	3020	12.660	11.742	3	2	5 1/4	B	24.00	6.50
	140TL26	26	3020	15.463	14.518	3	2	5 1/4	B	40.00	6.50
	140TL35	35	3535	20.494	19.523	3 1/2	3 1/2	6 1/2	C	78.00	14.0
	140TL45	45	4040	26.076	25.087	4	4	7 3/4	C	118.00	22.0
	140TL60	60	4040	34.442	33.438	4	4	7 3/4	C	188.00	22.0
	140TL70	70	4040	40.017	39.006	4	4	7 3/4	C	241.00	22.0
2 X 1 1/4	160TL11	11	2517	8.011	7.099	2 1/2	1 3/4	4 1/4	B	9.00	3.50
	160TL12	12	3020	8.664	7.727	3	2	5 1/4	B	11.00	6.50
	160TL13	13	3020	9.314	8.357	3	2	5 1/4	B	13.00	6.50
	160TL14	14	3020	9.963	8.988	3	2	5 1/4	B	16.00	6.50
	160TL15	15	3535	10.609	9.620	3 1/2	3 1/2	6 1/2	B	25.00	14.00
	160TL16	16	3535	11.255	10.252	3 1/2	3 1/2	6 1/2	B	28.00	14.00
	160TL17	17	3535	11.899	10.885	3 1/2	3 1/2	6 1/2	B	32.00	14.00
	160TL18	18	3535	12.543	11.518	3 1/2	3 1/2	6 1/2	B	35.00	14.00
	160TL19	19	3535	13.185	12.151	3 1/2	3 1/2	6 1/2	B	39.00	14.00
	160TL21	21	3535	14.470	13.419	3 1/2	3 1/2	6 1/2	B	48.00	14.00
	160TL26	26	3535	17.671	16.593	3 1/2	3 1/2	6 1/2	B	68.00	14.00
	160TL35	35	4040	23.422	22.312	4	4	7 3/4	C	118.00	22.00
	160TL45	45	4040	29.208	28.671	4	4	7 3/4	C	186.00	22.00
	160TL60	60	4545	39.362	38.215	4 1/2	4 1/2	8 3/4	C	292.00	30.00
	D35TL19	19	1008	2.472	2.278	1	7/8	1 53/64	B	0.60	0.30

Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.




American Metric® Corporation

GROUP: 098

1-098-050103

American Standard (ANSI) Taper-Bush Sprockets

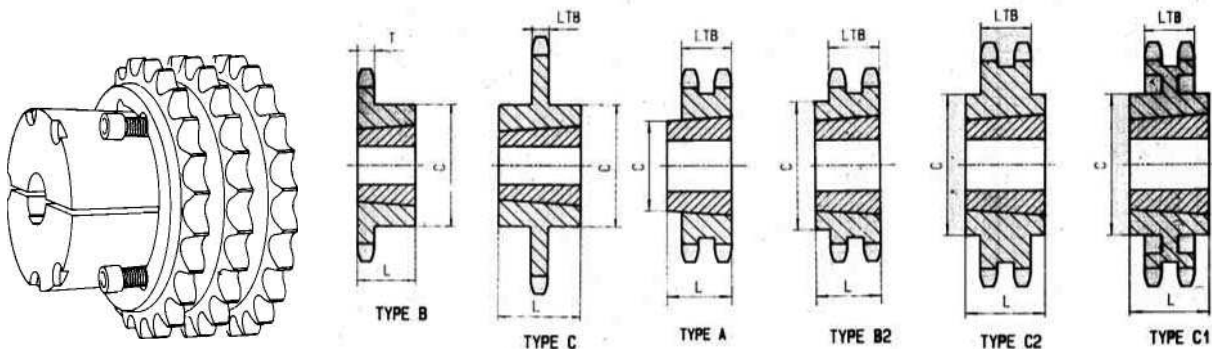


DOUBLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
3/8 X 3/16	D35TL20	20	1008	2.593	2.397	1	7/8	1 15/16	B	0.80	0.30
	D35TL21	21	1008	2.713	2.516	1	7/8	1 1/16	B	1.40	0.30
	D35TL22	22	1008	2.833	2.635	1	7/8	2 3/16	B	1.70	0.30
	D35TL23	23	1210	3.074	2.873	1 1/4	1	2 7/16	B	1.80	0.60
	D35TL26	26	1210	3.314	3.111	1 1/4	1	2 5/8	B	2.00	0.60
	D35TL30	30	1610	3.793	3.588	1 5/8	1	3 1/8	B	1.80	0.90
	D35TL32	32	1610	4.032	3.826	1 5/8	1	3 1/4	B	2.00	0.90
	D35TL35	35	1610	4.392	4.183	1 5/8	1	3 1/4	B	2.30	0.90
	D35TL40	40	1610	4.990	4.780	1 5/8	1	3 1/4	B	2.90	0.90
	D35TL45	45	1610	5.588	5.376	1 5/8	1	3 1/4	B	3.20	0.90
	D35TL48	48	1610	5.946	5.734	1 5/8	1	3 5/8	B	3.50	0.90
	D35TL54	54	1610	6.663	6.449	1 5/8	1	3 5/8	B	3.90	0.90
	D35TL60	60	1610	7.380	7.165	1 5/8	1	3 5/8	B	4.90	0.90
	D35TL70	70	1610	8.575	8.358	1 5/8	1	3 5/8	B	6.30	0.90
	D35TL80	80	1610	9.770	9.552	1 5/8	1	3 5/8	B	7.90	0.90
	D35TL96	96	1610	11.680	11.461	1 5/8	1	3 5/8	B	9.90	0.90
	D35TL112	112	1610	13.590	13.371	1 5/8	1	3 5/8	B	10.90	0.90
1/2 X 5/16	D40TL15	15	1008	2.652	2.405	1	7/8	1 17/64	A	0.50	0.30
	D40TL16	16	1008	2.814	2.563	1	7/8	1 17/64	A	0.60	0.30
	D40TL17	17	1008	2.975	2.721	1	7/8	1 17/64	A	0.70	0.30
	D40TL18	18	1210	3.135	2.879	1 1/4	1	2 5/16	B	0.70	0.60
	D40TL19	19	1210	3.296	3.038	1 1/4	1	2 1/2	B	0.90	0.60
	D40TL20	20	1610	3.457	3.196	1 5/8	1	2 5/8	B	0.90	0.90
	D40TL21	21	1610	3.617	3.355	1 5/8	1	2 3/4	B	1.00	0.90
	D40TL23	23	1610	3.938	3.672	1 5/8	1	3	B	1.30	0.90
	D40TL25	25	2012	4.258	3.989	2	1 1/4	3 13/32	B	1.60	1.70
	D40TL30	30	2012	5.057	4.783	2	1 1/4	4 15/64	B	3.40	1.70
	D40TL36	36	2012	6.015	5.737	2	1 1/4	5 5/32	B	5.90	1.70
	D40TL42	42	2517	6.972	6.691	2 1/2	1 3/4	4 1/4	C	7.00	3.50
	D40TL48	48	2517	7.928	7.645	2 1/2	1 3/4	4 1/4	C	9.60	3.50
	D40TL52	52	2517	8.566	8.281	2 1/2	1 3/4	4 1/4	C	11.40	3.50
	D40TL60	60	2517	9.841	9.554	2 1/2	1 3/4	4 1/4	C	15.40	3.50
	D40TL68	68	2517	11.115	10.826	2 1/2	1 3/4	4 1/4	C	20.50	3.50
	D40TL76	76	2517	12.389	12.099	2 1/2	1 3/4	4 1/4	C	25.70	3.50
	D40TL84	84	2517	13.663	13.372	2 1/2	1 3/4	4 1/4	C	31.60	3.50
	D40TL95	95	2517	15.414	15.122	2 1/2	1 3/4	4 1/4	C	34.10	3.50
	D40TL102	102	2517	16.529	16.236	2 1/2	1 3/4	4 1/4	C	36.80	3.50
5/8 X 3/8	D50TL14	14	1008	3.113	2.809	1	7/8	-	A	0.80	0.30
	D50TL15	15	1210	3.315	3.006	1 1/4	1	-	A	0.90	0.60
	D50TL16	16	1210	3.517	3.204	1 1/4	1	-	A	1.10	0.60
	D50TL17	17	1610	3.719	3.410	1 5/8	1	-	A	1.10	0.60
	D50TL18	18	1610	3.920	3.599	1 5/8	1	-	A	1.30	0.90
	D50TL19	19	1610	4.120	3.797	1 5/8	1	-	A	1.60	0.90
	D50TL20	20	2012	4.321	3.995	2	1 1/4	3 1/4	B	1.50	1.70
	D50TL21	21	2012	4.552	4.193	2	1 1/4	3 1/2	B	1.90	1.70
	D50TL25	25	2012	5.322	4.987	2	1 1/4	4 9/32	B	3.80	1.70
	D50TL30	30	2517	6.321	5.979	2 1/2	1 3/4	5 9/32	B	7.50	3.50
	D50TL36	36	2517	7.519	7.171	2 1/2	1 3/4	4 1/4	C	9.40	3.50
	D50TL42	42	2517	8.715	8.363	2 1/2	1 3/4	4 1/4	C	13.40	3.50
	D50TL48	48	2517	9.911	9.556	2 1/2	1 3/4	4 1/4	C	18.60	3.50

Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.

American Standard (ANSI) Taper-Bush Sprockets

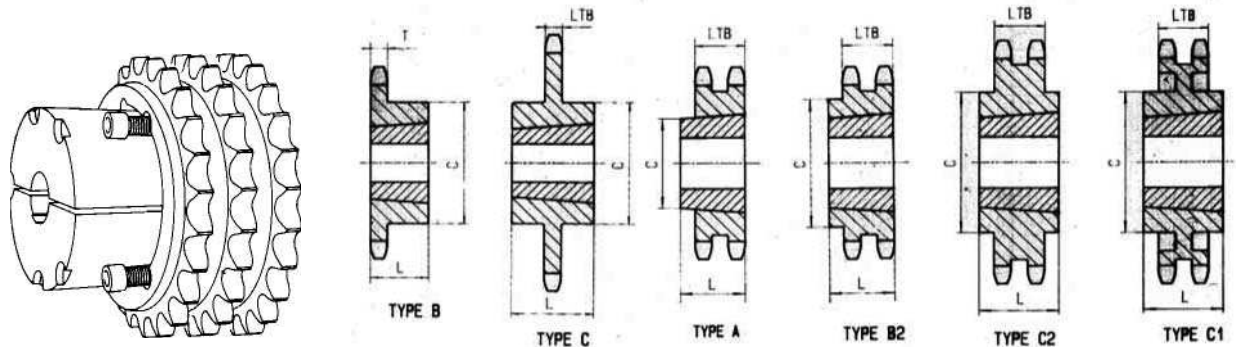

DOUBLE

Size	Part No.	Teeth	Bushing No.	Diameter		Max. Bore	Dimensions		Type	Weight - Lbs. (App)	
				O.D.	P.D.		L	C		Rim Only	Bush Only
5/8 X 3/8	D50TL52	52	2517	10.707	10.351	2 1/2	1 3/4	4 3/8	C	22.20	3.50
	D50TL60	60	2517	12.301	11.942	2 1/2	1 3/4	4 3/8	C	30.30	3.50
	D50TL68	68	2517	13.893	13.533	2 1/2	1 3/4	4 3/8	C	39.40	3.50
	D50TL76	76	2517	15.486	15.124	2 1/2	1 3/4	4 3/8	C	41.20	3.50
	D50TL84	84	2517	17.079	16.715	2 1/2	1 3/4	4 3/8	C	45.30	3.50
	D50TL95	95	2517	19.267	18.903	2 1/2	1 3/4	4 3/8	C	58.80	3.50
	D50TL102	102	2517	20.661	20.259	2 1/2	1 3/4	4 3/8	C	67.10	3.50
3/4 X 1/2	D60TL13	13	1215	3.493	3.134	1 1/4	1 1/2	2 1/4	B	1.20	0.80
	D60TL14	14	1215	3.736	3.371	1 1/4	1 1/2	2 1/2	B	1.60	0.80
	D60TL15	15	1615	3.979	3.607	1 5/8	1 1/2	2 13/16	B	1.30	1.20
	D60TL16	16	1615	4.221	3.844	1 5/8	1 1/2	3	B	2.20	1.20
	D60TL17	17	1615	4.462	4.082	1 5/8	1 1/2	3 1/4	B	2.50	1.20
	D60TL18	18	2012	4.704	4.319	2	1 1/4	-	A	3.00	1.70
	D60TL19	19	2012	4.945	4.557	2	1 1/4	-	A	3.50	1.70
	D60TL20	20	2517	5.185	4.794	2 1/2	1 3/4	3 61/64	B	4.00	3.50
	D60TL21	21	2517	5.426	5.032	2 1/2	1 3/4	4 3/16	B	5.00	3.50
	D60TL25	25	2517	6.387	5.984	2 1/2	1 3/4	5 5/32	B	7.50	3.50
	D60TL30	30	2517	7.586	7.175	2 1/2	1 3/4	6 11/32	B	13.50	3.50
	D60TL36	36	2517	9.022	8.605	2 1/2	1 3/4	4 1/4	C	17.50	3.50
	D60TL42	42	2517	10.458	10.036	2 1/2	1 3/4	4 1/4	C	25.50	3.50
	D60TL45	45	2517	11.176	10.752	2 1/2	1 3/4	4 1/4	C	29.50	3.50
	D60TL52	52	2517	12.849	12.422	2 1/2	1 3/4	4 1/4	C	41.00	3.50
	D60TL60	60	2517	14.761	14.330	2 1/2	1 3/4	4 1/4	D	32.50	3.50
	D60TL68	68	2517	16.672	16.240	2 1/2	1 3/4	4 1/2	D	36.50	3.50
	D60TL76	76	3020	18.583	18.149	3	2	5 1/4	D	42.50	6.50
	D60TL95	95	3020	22.684	22.684	3	2	5 1/4	D	48.50	6.50
1 X 5/8	D80TL13	13	1615	4.657	4.179	1 5/8	1 1/2	-	A	3.40	1.20
	D80TL14	14	2012	4.982	4.494	2	1 1/4	-	A	3.50	1.70
	D80TL15	15	2012	5.305	4.810	2	1 1/4	-	A	4.30	1.70
	D80TL16	16	2517	5.627	5.126	2 1/2	1 3/4	3 1/8	A	3.80	3.50
	D80TL17	17	2517	5.590	5.442	2 1/2	1 3/4	3 1/8	A	5.10	3.50
	D80TL18	18	2517	6.271	5.759	2 1/2	1 3/4	3 1/8	A	6.40	3.50
	D80TL19	19	3020	6.593	6.076	3	2	5	B	6.60	6.50
	D80TL20	20	3020	6.914	6.392	3	2	5 1/4	B	7.10	6.50
	D80TL21	21	3020	7.235	6.710	3	2	5 9/16	B	8.90	6.50
	D80TL25	25	3020	8.516	7.979	3	2	6 7/8	B	16.50	6.50
	D80TL30	30	3020	10.114	9.567	3	2	5 1/4	C	25.10	6.50
	D80TL36	36	3020	12.030	11.474	3	2	5 1/4	C	39.40	6.50
	D80TL42	42	3020	13.944	13.392	3	2	5 1/4	C	41.40	6.50
	D80TL45	45	3020	14.901	14.336	3	2	5 1/4	D	56.20	6.50
	D80TL52	52	3020	17.132	16.562	3	2	5 1/4	D	66.30	6.50
	D80TL60	60	3020	19.681	19.107	3	2	5 1/4	D	72.00	6.50
	D80TL68	68	3020	22.230	21.653	3	2	5 1/4	D	89.10	6.50
	D80TL76	76	3020	24.778	24.198	3	2	5 1/4	D	112.00	6.50
	D80TL95	95	3020	30.828	30.245	3	2	5 1/4	D	125.00	6.50

Sprockets are of steel construction. Sprockets prepared for American Standard Taper-Lock® Bushings.

NOTE: Triple American Standard (ANSI) Taper-Bush Sprockets are also available