


Timing Belt Open Ended MXL, XL, L, H, XH, XXH & D



XL


Standard compound: Polyurethane 92 ShA
 Standard width tolerance: +/-0,5 mm
 Standard thickness: 2,3 +/-0,3 mm
 Standard length tolerance: +/-0,8 mm/m
 Standard roll length: 100 m

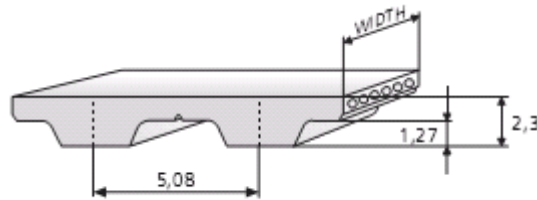

STANDARD WIDTHS (inch)		25	37	50	75	100	150	200
Weight (gr/m)		15	20	30	45	60	90	120
Steel	Max Traction Load (N)	145	235	355	590	800	1245	1660
	Breaking Strength (N)	590	950	1425	2375	3205	4985	6650
	Elongation at MTL (mm/m)	4	4	4	4	4	4	4
Kevlar	Max Traction Load (N)	210	335	505	845	1140	1775	2365
	Breaking Strength (N)	845	1350	2025	3380	4565	7100	9465
	Elongation at MTL (mm/m)	8	8	8	8	8	8	8
Stainless	Max Traction Load (N)	85	140	210	355	480	-	-
	Breaking Strength (N)	355	570	855	1425	1920	-	-
	Elongation at MTL (mm/m)	3,8	3,8	3,8	3,8	3,8	-	-

L


Standard compound: Polyurethane 92 ShA
 Standard width tolerance: +/-0,5 mm
 Standard thickness: 3,6 +/-0,3 mm
 Standard length tolerance: +/-0,8 mm/m
 Standard roll length: 100 m

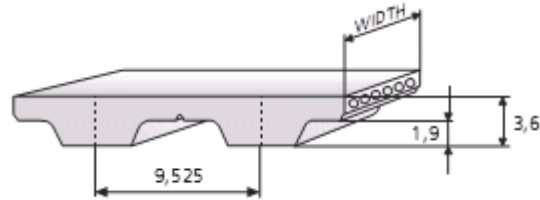

STANDARD WIDTHS (inch)		37	50	75	100	150	200	400
Weight (gr/m)		35	45	65	90	135	180	325
Steel	Max Traction Load (N)	570	760	1270	1715	2670	3560	7125
	Breaking Strength (N)	2290	3055	5090	6870	10690	14255	24950
	Elongation at MTL (mm/m)	4	4	4	4	4	4	4
Kevlar	Max Traction Load (N)	595	795	1330	1795	2790	3720	7445
	Breaking Strength (N)	2390	3190	5320	7180	11170	14895	26065
	Elongation at MTL (mm/m)	8	8	8	8	8	8	8
Stainless	Max Traction Load (N)	470	625	1045	1410	-	-	-
	Breaking Strength (N)	1880	2505	4180	5640	-	-	-
	Elongation at MTL (mm/m)	3,8	3,8	3,8	3,8	-	-	-

H


Standard compound: Polyurethane 92 ShA
 Standard width tolerance: +/-0,5 mm
 Standard thickness: 4,3 +/-0,3 mm
 Standard length tolerance: +/-0,8 mm/m
 Standard roll length: 100 m

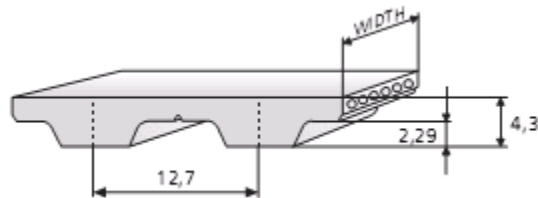

STANDARD WIDTHS (inch)		50	75	100	150	200	300	400
Weight (gr/m)		55	80	110	160	215	325	430
Steel	Max Traction Load (N)	995	1695	2290	3490	4785	7665	11170
	Breaking Strength (N)	3990	6780	9175	13965	19150	29125	39100
	Elongation at MTL (mm/m)	4	4	4	4	4	4	4
Kevlar	Max Traction Load (N)	895	1535	2050	3205	4360	7020	10260
	Breaking Strength (N)	3590	6155	8205	12825	17440	26675	35910
	Elongation at MTL (mm/m)	8	8	8	8	8	8	8
Stainless	Max Traction Load (N)	805	1370	1855	2825	3875	-	-
	Breaking Strength (N)	3230	5490	7425	11305	15500	-	-
	Elongation at MTL (mm/m)	3,8	3,8	3,8	3,8	3,8	-	-

XH

Standard compound: Polyurethane 92 ShA
 Standard width tolerance: +/-1 mm
 Standard thickness: 11,2 +/-0,5 mm
 Standard length tolerance: +/-0,8 mm/m
 Standard roll length: 100 m

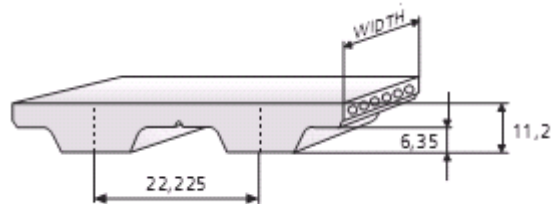

STANDARD WIDTHS (inch)		100	150	200	300	400	600
Weight (gr/m)		250	400	530	795	1060	1625
Steel	Max Traction Load (N)	3610	5640	7670	12350	18050	26815
	Breaking Strength (N)	14440	22560	30685	46930	63175	93860
	Elongation at MTL (mm/m)	4	4	4	4	4	4
Kevlar	Max Traction Load (N)	4215	6675	9135	14800	21690	32940
	Breaking Strength (N)	16870	26710	36555	56240	75920	115290
	Elongation at MTL (mm/m)	8	8	8	8	8	8
Stainless	Max Traction Load (N)	2865	4480	6095	-	-	-
	Breaking Strength (N)	11475	17930	24385	-	-	-
	Elongation at MTL (mm/m)	3,8	3,8	3,8	-	-	-