


# Metric Fixed Speed Companion Sheave

(For Variable Speed Belt Drives)

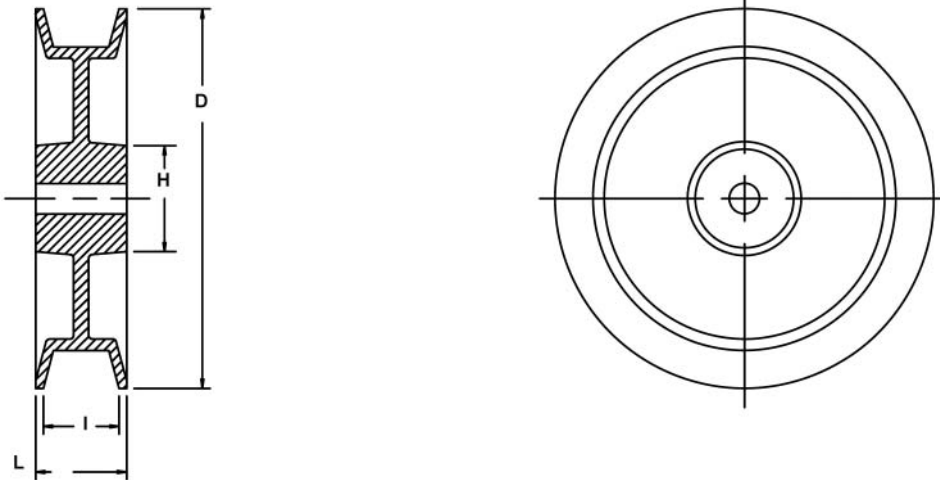

Model No.	F 130		F160		F190		F240		F300	
Recommended Belt Size	22x8		28x10		36x12		46x13		54x16	
I	22		28		36		46		54	
L	26		32		43		52		70	
Pitch Dia. DP	O.D. D	Hub Ø H	O.D. D	Hub Ø H	O.D. D	Hub Ø H	O.D. D	Hub Ø H	O.D. D	Hub Ø H
80	88	30	89	35						
90	98	38	99	38						
100	108	38	109	38						
112	120	42	121	42	122	50				
125	133	46	134	46	135	54				
140	148	48	149	48	150	54	153	55		
160	168	48	169	48	170	60	173	68		
170	178	55	179	55	180	62	183	70		
180	188	58	189	58	190	68	193	75	196	80
200	208	68	209	68	210	70	213	78	216	82
224	232	70	233	70	234	70	237	85	240	90
250	258	70	259	75	260	75	263	88	266	92
280	288	70	289	78	290	78	293	90	296	92
315	323	80	324	80	325	80	328	90	331	100
355	363	85	364	90	365	90	368	90	371	95
400			409	90	410	90	413	90	416	95
450					460	90	463	95	466	95
500							513	95	516	105

Fixed Speed Companion Sheaves are sold without starter holes or bores.  
The drawing indicates the proper location for a bore.

Part Number Example:  
300X250      300 = Model No. F300  
                  250 = Pitch Diameter