



American Standard Linear Bearings Standard Type

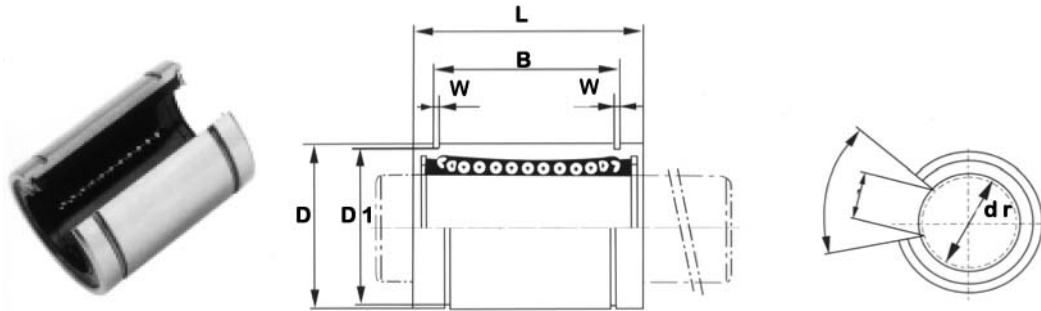


Part Number	No. of Ball Rows	Main Diameters									W	Eccentricity (max)	Basic Load Rating	
		Inscribed Circle Diameter		Outer Diameter		Length		Outer Locking Groove					Dynamic C (kgf)	Static Co (kgf)
		dr	Tolerance	D	Tolerance	L	Tolerance	B	Tolerance	D1				
LMB 04 UU	3	1/4	0	0.500	0	0.750	0	0.511	0	0.469	0.039	0.012	21	27
LMB 06 UU	4	3/8	0	0.625	0	0.875	0	0.639	0	0.588	0.039	0.012	23	32
LMB 08 UU	4	1/2	0	0.875	0	1.250	0	0.963	0	0.821	0.046	0.012	52	80
LMB 10 UU	4	5/8	0	1.125	0	1.500	0	1.104	0	1.059	0.056	0.012	79	120
LMB 12 UU	5	3/4	0	1.250	0	1.625	0	1.166	0	1.176	0.056	0.015	88	140
LMB 16 UU	5	1	0	1.563	0	2.250	0	1.755	0	1.469	0.068	0.015	100	160
LMB 20 UU	6	1 1/4	0	2.000	0	2.625	0	2.005	0	1.886	0.068	0.020	160	280
LMB 24 UU	6	1 1/2	0	2.375	0	3.000	0	2.412	0	2.239	0.086	0.020	220	410
LMB 32 UU	6	2	0	3.000	0	4.000	0	3.192	0	2.838	0.103	0.025	390	810

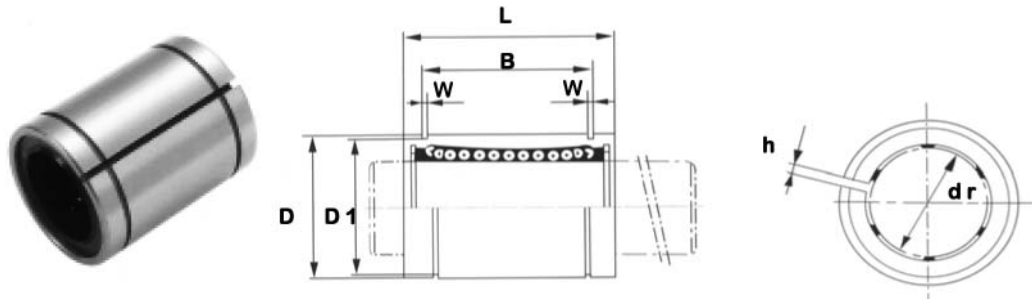

Part Number	No. of Ball Rows	Main Diameters											Eccentricity (max)	Basic Load Rating	
		Inscribed Circle Diameter		Outer Diameter		Length		Outer Locking Groove			W	h		Dynamic C (kgf)	Static Co (kgf)
		dr	Tolerance	D	Tolerance	L	Tolerance	B	Tolerance	D1					
LMB 04 UUAJ	3	1/4	0	0.500	0	0.750	0	0.511	0	0.469	0.039	1/25	0.012	21	27
LMB 06 UUAJ	4	3/8	0	0.625	0	0.875	0	0.639	0	0.588	0.039	1/25	0.012	23	32
LMB 08 UUAJ	4	1/2	0	0.875	0	1.250	0	0.963	0	0.821	0.046	3/50	0.012	52	80
LMB 10 UUAJ	4	5/8	0	1.125	0	1.500	0	1.104	0	1.059	0.056	3/50	0.012	79	120
LMB 12 UUAJ	5	3/4	0	1.250	0	1.625	0	1.166	0	1.176	0.056	3/50	0.015	88	140
LMB 16 UUAJ	5	1	0	1.563	0	2.250	0	1.755	0	1.469	0.068	3/50	0.015	100	160
LMB 20 UUAJ	6	1 1/4	0	2.000	0	2.625	0	2.005	0	1.886	0.068	1/10	0.020	160	280
LMB 24 UUAJ	6	1 1/2	0	2.375	0	3.000	0	2.412	0	2.239	0.086	3/25	0.020	220	410
LMB 32 UUAJ	6	2	0	3.000	0	4.000	0	3.192	0	2.838	0.103	3/25	0.025	390	810

American Standard Linear Bearings Open Type

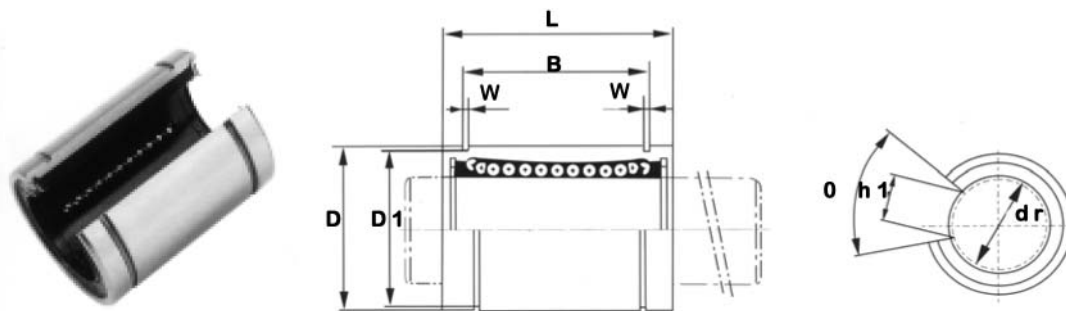

Part Number	No. of Ball Rows	Main Diameters												Eccentricity (max)	Basic Load Rating	
		Inscribed Circle Diameter		Outer Diameter		Length		Outer Locking Groove			W	h1	0		Dynamic C (kgf)	Static Co (kgf)
		dr	Tolerance	D	Tolerance	L	Tolerance	B	Tolerance	D1						
LMB 08 UUOP	3	1/2	0	0.875	0	1.250	0	0.963	0	0.821	0.046	0.340	80°	0.012	52	80
LMB 10 UUOP	3	5/8	0	1.125	0	1.500	0	1.104	0	1.059	0.056	0.375	80°	0.012	79	120
LMB 12 UUOP	4	3/4	0	1.250	0	1.625	0	1.166	0	1.176	0.056	0.438	60°	0.015	88	140
LMB 16 UUOP	4	1	0	1.563	0	2.250	0	1.755	0	1.469	0.068	0.563	50°	0.015	100	160
LMB 20 UUOP	5	1 1/4	0	2.000	0	2.625	0	2.005	0	1.886	0.068	0.625	50°	0.020	160	280
LMB 24 UUOP	5	1 1/2	0	2.375	0	3.000	0	2.412	0	2.239	0.086	0.750	50°	0.020	220	410
LMB 32 UUOP	5	2	0	3.000	0	4.000	0	3.192	0	2.838	0.103	1.000	50°	0.025	390	810