


Metric Poly-V Belts

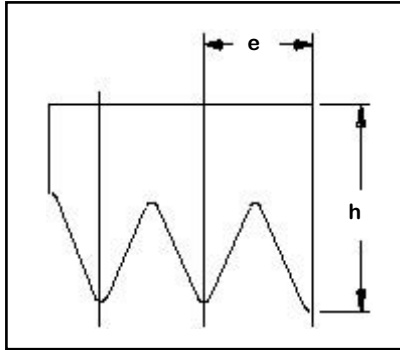

| SECTION | e mm | h mm |
|---------|---------|---------|
| H | 1.60 | 3.0 |
| J | 2.34 | 4.0 |
| K | 3.56 | 4.0-6.0 |
| L | 4.70 | 10.0 |
| M | 9.40 | 17.0 |

Ametric® Poly-V Belts
 - Moderately oil-resistant
 - Resistant to temperatures
 from -30 to 80° C
 - Suitable for tropical
 climates

Ordering Example:
 4 J 1200
 4----- Number of ribs
 J----- Section
 1200--- Nominal pitch
 length (mm)


Ametric® Poly-V Belts
Now Available in
Section H
and
Section K.

| Section J | | |
|-----------|--------|------|
| Part No. | Length | |
| | mm | inch |
| J 280 | 279 | 11 |
| J 330 | 330 | 13 |
| J 356 | 356 | 14 |
| J 362 | 363 | 14.3 |
| J 381 | 381 | 15 |
| J 406 | 406 | 16 |
| J 414 | 414 | 16.3 |
| J 432 | 432 | 17 |
| J 457 | 457 | 18 |
| J 483 | 483 | 19 |
| J 508 | 508 | 20 |
| J 559 | 559 | 22 |
| J 572 | 572 | 22.5 |
| J 584 | 584 | 23 |
| J 610 | 610 | 24 |
| J 660 | 660 | 26 |
| J 686 | 686 | 27 |
| J 711 | 711 | 28 |
| J 723 | 724 | 28.5 |
| J 737 | 737 | 29 |
| J 762 | 762 | 30 |
| J 813 | 813 | 32 |
| J 836 | 836 | 32.9 |
| J 838 | 838 | 33 |
| J 864 | 864 | 34 |
| J 890 | 889 | 35 |
| J 914 | 914 | 36 |
| J 955 | 955 | 37.6 |
| J 965 | 965 | 38 |
| J 991 | 991 | 39 |
| J 1016 | 1016 | 40 |
| J 1055 | 1054 | 41.5 |
| J 1092 | 1092 | 43 |
| J 1100 | 1100 | 43.3 |
| J 1105 | 1105 | 43.5 |
| J 1110 | 1110 | 43.7 |
| J 1123 | 1123 | 44.2 |
| J 1130 | 1130 | 44.5 |
| J 1142 | 1143 | 45 |
| J 1150 | 1151 | 45.3 |
| J 1168 | 1168 | 46 |
| J 1185 | 1186 | 46.7 |
| J 1194 | 1194 | 47 |
| J 1200 | 1199 | 47.2 |
| J 1208 | 1209 | 47.6 |
| J 1220 | 1219 | 48 |
| J 1222 | 1222 | 48.1 |
| J 1244 | 1245 | 49 |
| J 1260 | 1260 | 49.6 |
| J 1262 | 1262 | 49.7 |
| J 1270 | 1270 | 50 |
| J 1285 | 1285 | 50.6 |
| J 1295 | 1295 | 51 |
| J 1301 | 1300 | 51.2 |
| J 1309 | 1308 | 51.5 |
| J 1316 | 1316 | 51.8 |
| J 1321 | 1321 | 52 |
| J 1333 | 1334 | 52.5 |
| J 1340 | 1341 | 52.8 |
| J 1355 | 1354 | 53.3 |
| J 1371 | 1372 | 54 |
| J 1397 | 1397 | 55 |
| J 1428 | 1427 | 56.2 |
| J 1439 | 1440 | 56.7 |
| J 1460 | 1461 | 57.5 |

| Section J | | |
|-----------|--------|------|
| Part No. | Length | |
| | mm | inch |
| J 1473 | 1473 | 58 |
| J 1475 | 1476 | 58.1 |
| J 1518 | 1519 | 59.8 |
| J 1549 | 1549 | 61 |
| J 1600 | 1600 | 63 |
| J 1625 | 1626 | 64 |
| J 1651 | 1651 | 65 |
| J 1663 | 1664 | 65.5 |
| J 1700 | 1699 | 66.9 |
| J 1752 | 1753 | 69 |
| J 1780 | 1781 | 70.1 |
| J 1800 | 1801 | 70.9 |
| J 1854 | 1854 | 73 |
| J 1875 | 1875 | 73.8 |
| J 1895 | 1895 | 74.6 |
| J 1910 | 1910 | 75.2 |
| J 1915 | 1915 | 75.4 |
| J 1925 | 1925 | 75.8 |
| J 1930 | 1930 | 76 |
| J 1956 | 1956 | 77 |
| J 1965 | 1966 | 77.4 |
| J 1980 | 1979 | 77.9 |
| J 1992 | 1991 | 78.4 |
| J 2020 | 2019 | 79.5 |
| J 2083 | 2083 | 82 |
| J 2155 | 2154 | 84.8 |
| J 2210 | 2210 | 87 |
| J 2286 | 2286 | 90 |
| J 2340 | 2337 | 92.1 |
| J 2490 | 2489 | 98 |
| L 954 | 953 | 37.5 |
| L 991 | 991 | 39 |
| L 1041 | 1041 | 41 |
| L 1075 | 1074 | 42.3 |
| L 1149 | 1143 | 45 |
| L 1168 | 1168 | 46 |
| L 1194 | 1194 | 47 |
| L 1219 | 1219 | 48 |
| L 1270 | 1270 | 50 |
| L 1295 | 1295 | 51 |
| L 1333 | 1321 | 52 |
| L 1346 | 1346 | 53 |
| L 1371 | 1372 | 54 |
| L 1397 | 1397 | 55 |
| L 1422 | 1422 | 56 |
| L 1435 | 1435 | 56.5 |
| L 1475 | 1473 | 58 |
| L 1500 | 1499 | 59 |
| L 1562 | 1562 | 61.5 |
| L 1580 | 1575 | 62 |
| L 1613 | 1613 | 63.5 |
| L 1651 | 1651 | 65 |
| L 1664 | 1664 | 65.5 |
| L 1690 | 1689 | 66.5 |
| L 1715 | 1715 | 67.5 |
| L 1727 | 1727 | 68 |
| L 1740 | 1740 | 68.5 |
| L 1764 | 1765 | 69.5 |
| L 1803 | 1803 | 71 |
| L 1841 | 1842 | 72.5 |
| L 1943 | 1943 | 76.5 |
| L 1956 | 1956 | 77 |

| Section L | | |
|-----------|--------|-------|
| Part No. | Length | |
| | mm | inch |
| L 1981 | 1981 | 78 |
| L 2020 | 2019 | 79.5 |
| L 2070 | 2070 | 81.5 |
| L 2095 | 2096 | 82.5 |
| L 2135 | 2134 | 84 |
| L 2195 | 2197 | 86.5 |
| L 2235 | 2235 | 88 |
| L 2325 | 2324 | 91.5 |
| L 2360 | 2362 | 93 |
| L 2477 | 2477 | 97.5 |
| L 2515 | 2515 | 99 |
| L 2705 | 2705 | 106.5 |
| L 2745 | 2743 | 108 |
| L 2845 | 2845 | 112 |
| L 2895 | 2896 | 114 |
| L 2920 | 2921 | 115 |
| L 2995 | 2997 | 118 |
| L 3085 | 3086 | 121.5 |
| L 3125 | 3124 | 123 |
| L 3290 | 3289 | 129.5 |
| L 3325 | 3327 | 131 |
| L 3492 | 3492 | 137.5 |
| L 3695 | 3696 | 145.5 |
| L 4050 | 4051 | 159.5 |
| L 4190 | 4191 | 165 |
| L 4470 | 4470 | 176 |
| L 4620 | 4623 | 182 |
| L 5030 | 5029 | 198 |
| L 5385 | 5385 | 212 |
| L 6095 | 6096 | 240 |
| M 2285 | 2286 | 90 |
| M 2390 | 2388 | 94 |
| M 2515 | 2515 | 99 |
| M 2695 | 2692 | 106 |
| M 2830 | 2832 | 111.5 |
| M 2920 | 2921 | 115 |
| M 3010 | 3010 | 118.5 |
| M 3125 | 3124 | 123 |
| M 3325 | 3327 | 131 |
| M 3530 | 3531 | 139 |
| M 3735 | 3734 | 147 |
| M 4090 | 4089 | 161 |
| M 4190 | 4191 | 165 |
| M 4470 | 4470 | 176 |
| M 4650 | 4648 | 183 |
| M 5030 | 5029 | 198 |
| M 5410 | 5410 | 213 |
| M 6120 | 6121 | 241 |
| M 6885 | 6883 | 271 |
| M 7645 | 7645 | 301 |
| M 8410 | 8407 | 331 |
| M 9170 | 9169 | 361 |
| M 9930 | 9931 | 391 |
| M 10695 | 10693 | 421 |
| M 12215 | 12217 | 481 |
| M 13740 | 13741 | 541 |
| M 15265 | 15265 | 601 |
| M 16785 | 16789 | 661 |

American Standard (ANSI) Poly-V Belts

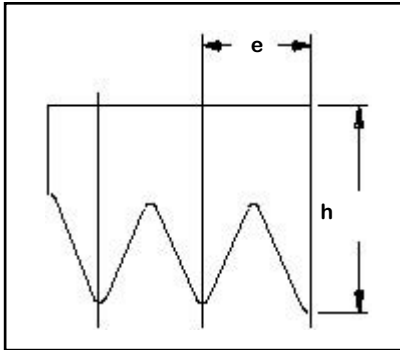

| SECTION | e inch | h inch |
|---------|-----------|-----------|
| J | 0.092 | 0.157 |
| L | 0.185 | 0.394 |

- Ametric® Poly-V Belts**
- Moderately oil-resistant
 - Resistant to temperatures from -30 to 80° C
 - Suitable for tropical climates

Ordering Example:
110 J 4
110----- Nominal Pitch
Length (Inch x 10)
J----- Section
280----- Number of Ribs

Note:
Sections H, K and M
Also Available.

| Section J | |
|-----------|----------------|
| Part No. | Length inch |
| 110 J | 11 |
| 130 J | 13 |
| 140 J | 14 |
| 143 J | 14.3 |
| 150 J | 15 |
| 160 J | 16 |
| 163 J | 16.3 |
| 170 J | 17 |
| 180 J | 18 |
| 190 J | 19 |
| 200 J | 20 |
| 220 J | 22 |
| 225 J | 22.5 |
| 230 J | 23 |
| 240 J | 24 |
| 260 J | 26 |
| 270 J | 27 |
| 280 J | 28 |
| 285 J | 28.5 |
| 290 J | 29 |
| 300 J | 30 |
| 320 J | 32 |
| 329 J | 32.9 |
| 330 J | 33 |
| 340 J | 34 |
| 350 J | 35 |
| 360 J | 36 |
| 376 J | 37.6 |
| 380 J | 38 |
| 390 J | 39 |
| 400 J | 40 |
| 415 J | 41.5 |

| Section J | |
|-----------|----------------|
| Part No. | Length inch |
| 430 J | 43 |
| 433 J | 43.3 |
| 435 J | 43.5 |
| 437 J | 43.7 |
| 442 J | 44.2 |
| 445 J | 44.5 |
| 450 J | 45 |
| 453 J | 45.3 |
| 460 J | 46 |
| 467 J | 46.7 |
| 470 J | 47 |
| 472 J | 47.2 |
| 476 J | 47.6 |
| 480 J | 48 |
| 481 J | 48.1 |
| 490 J | 49 |
| 496 J | 49.6 |
| 497 J | 49.7 |
| 500 J | 50 |
| 506 J | 50.6 |
| 510 J | 51 |
| 512 J | 51.2 |
| 515 J | 51.5 |
| 518 J | 51.8 |
| 520 J | 52 |
| 525 J | 52.5 |
| 528 J | 52.8 |
| 533 J | 53.3 |
| 540 J | 54 |
| 550 J | 55 |
| 562 J | 56.2 |
| 567 J | 56.7 |

| Section J | |
|-----------|----------------|
| Part No. | Length inch |
| 575 J | 57.5 |
| 580 J | 58 |
| 581 J | 58.1 |
| 598 J | 59.8 |
| 610 J | 61 |
| 630 J | 63 |
| 640 J | 64 |
| 650 J | 65 |
| 655 J | 65.5 |
| 669 J | 66.9 |
| 690 J | 69 |
| 701 J | 70.1 |
| 709 J | 70.9 |
| 730 J | 73 |
| 738 J | 73.8 |
| 746 J | 74.6 |
| 752 J | 75.2 |
| 754 J | 75.4 |
| 758 J | 75.8 |
| 760 J | 76 |
| 770 J | 77 |
| 774 J | 77.4 |
| 779 J | 77.9 |
| 784 J | 78.4 |
| 795 J | 79.5 |
| 820 J | 82 |
| 848 J | 84.8 |
| 870 J | 87 |
| 900 J | 90 |
| 921 J | 92.1 |
| 980 J | 98 |

| Section L | |
|-----------|----------------|
| Part No. | Length inch |
| 375 L | 37.5 |
| 390 L | 39 |
| 410 L | 41 |
| 423 L | 42.3 |
| 450 L | 45 |
| 460 L | 46 |
| 470 L | 47 |
| 480 L | 48 |
| 500 L | 50 |
| 510 L | 51 |
| 520 L | 52 |
| 530 L | 53 |
| 540 L | 54 |
| 550 L | 55 |
| 560 L | 56 |
| 565 L | 56.5 |
| 580 L | 58 |
| 590 L | 59 |
| 615 L | 61.5 |
| 620 L | 62 |
| 635 L | 63.5 |

| Section L | |
|-----------|----------------|
| Part No. | Length inch |
| 650 L | 65 |
| 655 L | 65.5 |
| 665 L | 66.5 |
| 675 L | 67.5 |
| 680 L | 68 |
| 685 L | 68.5 |
| 695 L | 69.5 |
| 710 L | 71 |
| 725 L | 72.5 |
| 765 L | 76.5 |
| 770 L | 77 |
| 780 L | 78 |
| 795 L | 79.5 |
| 815 L | 81.5 |
| 825 L | 82.5 |
| 840 L | 84 |
| 865 L | 86.5 |
| 880 L | 88 |
| 915 L | 91.5 |
| 930 L | 93 |
| 975 L | 97.5 |

| Section L | |
|-----------|----------------|
| Part No. | Length inch |
| 990 L | 99 |
| 1065 L | 106.5 |
| 1080 L | 108 |
| 1120 L | 112 |
| 1140 L | 114 |
| 1150 L | 115 |
| 1180 L | 118 |
| 1215 L | 121.5 |
| 1230 L | 123 |
| 1290 L | 129.5 |
| 1310 L | 131 |
| 1375 L | 137.5 |
| 1450 L | 145.5 |
| 1595 L | 159.5 |
| 1650 L | 165 |
| 1760 L | 176 |
| 1820 L | 182 |
| 1980 L | 198 |
| 2120 L | 212 |
| 2400 L | 240 |