


Metric Type L Couplings




Part Number	Fundamental Dimensions					Torque Needed kgm	Rotational Speed r/om	Bore Size mm	Bore Max mm	Mass kg
	A	B	C	D	E					
L035 4MM N/KW	16	21	8	6.5	-	0.05	30.000	4	9	0.03
L035 5MM N/KW	16	21	8	6.5	-	0.05	30.000	5	9	0.03
L035 6MM N/KW	16	21	8	6.5	-	0.05	30.000	6	9	0.03
L035 7MM N/KW	16	21	8	6.5	-	0.05	30.000	7	9	0.03
L035 8MM N/KW	16	21	8	6.5	-	0.05	30.000	8	9	0.03
L050 5MM N/KW	28	45	12	15.5	-	0.3	17.000	5	16	0.13
L050 6MM N/KW	28	45	12	15.5	-	0.3	17.000	6	16	0.13
L050 7MM N/KW	28	45	12	15.5	-	0.3	17.000	7	16	0.13
L050 8MM N/KW	28	45	12	15.5	-	0.3	17.000	8	16	0.13
L050 9MM 3mm KW	28	45	12	15.5	-	0.3	17.000	9	16	0.13
L050 10MM N/KW	28	45	12	15.5	-	0.3	17.000	10	16	0.13
L050 10MM 3mm KW	28	45	12	15.5	-	0.3	17.000	10	16	0.13
L050 11MM 4mm KW	28	45	12	15.5	-	0.3	17.000	11	16	0.13
L050 12MM N/KW	28	45	12	15.5	-	0.3	17.000	12	16	0.13
L050 12MM 4mm KW	28	45	12	15.5	-	0.3	17.000	12	16	0.13
L050 14MM N/KW	28	45	12	15.5	-	0.3	17.000	14	16	0.13
L050 14MM 5mm KW	28	45	12	15.5	-	0.3	17.000	14	16	0.13
L050 15MM N/KW	28	45	12	15.5	-	0.3	17.000	15	16	0.13
L050 15MM 5mm KW	28	45	12	15.5	-	0.3	17.000	15	16	0.13
L050 16MM 5mm KW	28	45	12	15.5	-	0.3	17.000	16	16	0.13
L070 7MM N/KW	35	51	13	19	-	0.5	13.000	7	19	0.24
L070 8MM N/KW	35	51	13	19	-	0.5	13.000	8	19	0.24
L070 9MM 3mm KW	35	51	13	19	-	0.5	13.000	9	19	0.24
L070 10MM N/KW	35	51	13	19	-	0.5	13.000	10	19	0.24
L070 10MM 3mm KW	35	51	13	19	-	0.5	13.000	10	19	0.24
L070 11MM 4mm KW	35	51	13	19	-	0.5	13.000	11	19	0.24
L070 12MM N/KW	35	51	13	19	-	0.5	13.000	12	19	0.24
L070 12MM 4mm KW	35	51	13	19	-	0.5	13.000	12	19	0.24
L070 14MM N/KW	35	51	13	19	-	0.5	13.000	14	19	0.24
L070 14MM 5mm KW	35	51	13	19	-	0.5	13.000	14	19	0.24
L070 15MM 5mm KW	35	51	13	19	-	0.5	13.000	15	19	0.24
L070 16MM 5mm KW	35	51	13	19	-	0.5	13.000	16	19	0.24
L070 17MM 5mm KW	35	51	13	19	-	0.5	13.000	17	19	0.24
L070 18MM 6mm KW	35	51	13	19	-	0.5	13.000	18	19	0.24
L070 19MM 6mm KW	35	51	13	19	-	0.5	13.000	19	19	0.24
L075 9MM 3mm KW	45	55	13	20.5	-	1.0	10.000	9	24	0.40
L075 10MM N/KW	45	55	13	20.5	-	1.0	10.000	10	24	0.40
L075 10MM 3mm KW	45	55	13	20.5	-	1.0	10.000	10	24	0.40
L075 11MM 4mm KW	45	55	13	20.5	-	1.0	10.000	11	24	0.40
L075 12MM 4mm KW	45	55	13	20.5	-	1.0	10.000	12	24	0.40
L075 14MM 5mm KW	45	55	13	20.5	-	1.0	10.000	14	24	0.40
L075 15MM N/KW	45	55	13	20.5	-	1.0	10.000	15	24	0.40
L075 15MM 5mm KW	45	55	13	20.5	-	1.0	10.000	15	24	0.40
L075 16MM 5mm KW	45	55	13	20.5	-	1.0	10.000	16	24	0.40
L075 17MM 5mm KW	45	55	13	20.5	-	1.0	10.000	17	24	0.40
L075 18MM 6mm KW	45	55	13	20.5	-	1.0	10.000	18	24	0.40
L075 19MM 6mm KW	45	55	13	20.5	-	1.0	10.000	19	24	0.40
L075 20MM 6mm KW	45	55	13	20.5	-	1.0	10.000	20	24	0.40
L075 22MM 6mm KW	45	55	13	20.5	-	1.0	10.000	22	24	0.40
L090 8MM N/KW	54	55	13	21	-	1.6	9.000	8	25	0.68
L090 10MM 3mm KW	54	55	13	21	-	1.6	9.000	10	25	0.68
L090 12MM N/K W/S	54	55	13	21	-	1.6	9.000	12	25	0.68
L090 12MM 4mm KW	54	55	13	21	-	1.6	9.000	12	25	0.68
L090 14MM N/KW	54	55	13	21	-	1.6	9.000	14	25	0.68

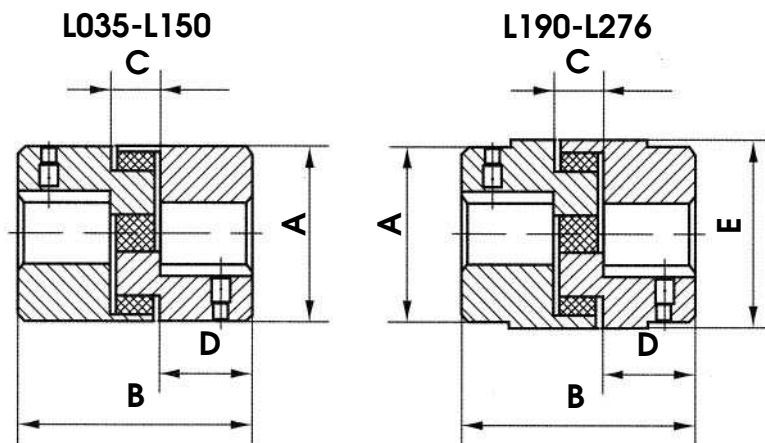

American Metric® Corporation

Metric Type L Couplings

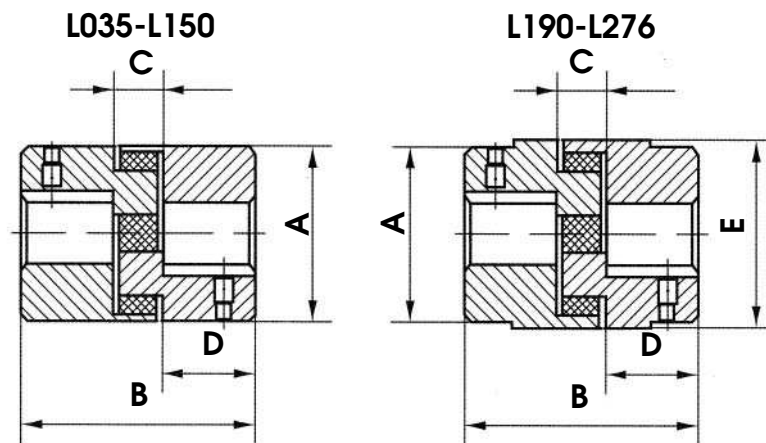

Part Number	Fundamental Dimensions					Torque Needed kgm	Rotational Speed r/om	Bore Size mm	Bore Max mm	Mass kg
	A	B	C	D	E					
L090 14MM 5mm KW	54	55	13	21	-	1.6	9.000	14	25	0.68
L090 15MM 5mm KW	54	55	13	21	-	1.6	9.000	15	25	0.68
L090 16MM 5mm KW	54	55	13	21	-	1.6	9.000	16	25	0.68
L090 18MM 6mm KW	54	55	13	21	-	1.6	9.000	18	25	0.68
L090 19MM N/KW	54	55	13	21	-	1.6	9.000	19	25	0.68
L090 19MM 6mm KW	54	55	13	21	-	1.6	9.000	19	25	0.68
L090 20MM 6mm KW	54	55	13	21	-	1.6	9.000	20	25	0.68
L090 22MM 6mm KW	54	55	13	21	-	1.6	9.000	22	25	0.68
L090 24MM 8mm KW	54	55	13	21	-	1.6	9.000	24	25	0.68
L090 25MM 8mm KW	54	55	13	21	-	1.6	9.000	25	25	0.68
L095 11MM 4mm KW	54	64	13	25.5	-	2.2	9.000	11	29	0.71
L095 12MM 4mm KW	54	64	13	25.5	-	2.2	9.000	12	29	0.71
L095 14MM N/KW	54	64	13	25.5	-	2.2	9.000	14	29	0.71
L095 14MM 5mm KW	54	64	13	25.5	-	2.2	9.000	14	29	0.71
L095 15MM N/KW	54	64	13	25.5	-	2.2	9.000	15	29	0.71
L095 15MM 5mm KW	54	64	13	25.5	-	2.2	9.000	15	29	0.71
L095 16MM 5mm KW	54	64	13	25.5	-	2.2	9.000	16	29	0.71
L095 17MM 5mm KW	54	64	13	25.5	-	2.2	9.000	17	29	0.71
L095 18MM 6mm KW	54	64	13	25.5	-	2.2	9.000	18	29	0.71
L095 19MM 6mm KW	54	64	13	25.5	-	2.2	9.000	19	29	0.71
L095 20MM 6mm KW	54	64	13	25.5	-	2.2	9.000	20	29	0.71
L095 22MM 6mm KW	54	64	13	25.5	-	2.2	9.000	22	29	0.71
L095 24MM 8mm KW	54	64	13	25.5	-	2.2	9.000	24	29	0.71
L095 25MM 8mm KW	54	64	13	25.5	-	2.2	9.000	25	29	0.71
L095 28MM 8mm KW	54	64	13	25.5	-	2.2	9.000	28	29	0.71
L099 14MM 5mm KW	65	73	19	27	-	4.5	7.000	14	35	1.22
L099 15MM N/KW	65	73	19	27	-	4.5	7.000	15	35	1.22
L099 15MM 5mm KW	65	73	19	27	-	4.5	7.000	15	35	1.22
L099 16MM 5mm KW	65	73	19	27	-	4.5	7.000	16	35	1.22
L099 18MM 6mm KW	65	73	19	27	-	4.5	7.000	18	35	1.22
L099 19MM 6mm KW	65	73	19	27	-	4.5	7.000	19	35	1.22
L099 20MM 6mm KW	65	73	19	27	-	4.5	7.000	20	35	1.22
L099 22MM 6mm KW	65	73	19	27	-	4.5	7.000	22	35	1.22
L099 24MM 8mm KW	65	73	19	27	-	4.5	7.000	24	35	1.22
L099 25MM 8mm KW	65	73	19	27	-	4.5	7.000	25	35	1.22
L099 28MM 8mm KW	65	73	19	27	-	4.5	7.000	28	35	1.22
L099 30MM 8mm KW	65	73	19	27	-	4.5	7.000	30	35	1.22
L100 12MM 5mm KW	65	89	19	35	-	5.0	7.000	12	35	1.40
L100 14MM 5mm KW	65	89	19	35	-	5.0	7.000	14	35	1.40
L100 15MM N/KW	65	89	19	35	-	5.0	7.000	15	35	1.40
L100 15MM 5mm KW	65	89	19	35	-	5.0	7.000	15	35	1.40
L100 16MM 5mm KW	65	89	19	35	-	5.0	7.000	16	35	1.40
L100 17MM 5mm KW	65	89	19	35	-	5.0	7.000	17	35	1.40
L100 18MM 6mm KW	65	89	19	35	-	5.0	7.000	18	35	1.40
L100 19MM 6mm KW	65	89	19	35	-	5.0	7.000	19	35	1.40
L100 20MM 6mm KW	65	89	19	35	-	5.0	7.000	20	35	1.40
L100 22MM 6mm KW	65	89	19	35	-	5.0	7.000	22	35	1.40
L100 24MM 8mm KW	65	89	19	35	-	5.0	7.000	24	35	1.40
L100 25MM 8mm KW	65	89	19	35	-	5.0	7.000	25	35	1.40
L100 28MM 8mm KW	65	89	19	35	-	5.0	7.000	28	35	1.40
L100 30MM 8mm KW	65	89	19	35	-	5.0	7.000	30	35	1.40
L100 32MM 10mm KW	65	89	19	35	-	5.0	7.000	32	35	1.40
L100 35MM 10mm KW	84	108	22	43	-	9.0	5.000	16	42	3.0




American Metric® Corporation

GROUP: 078


1-078-050107

Metric Type L Couplings

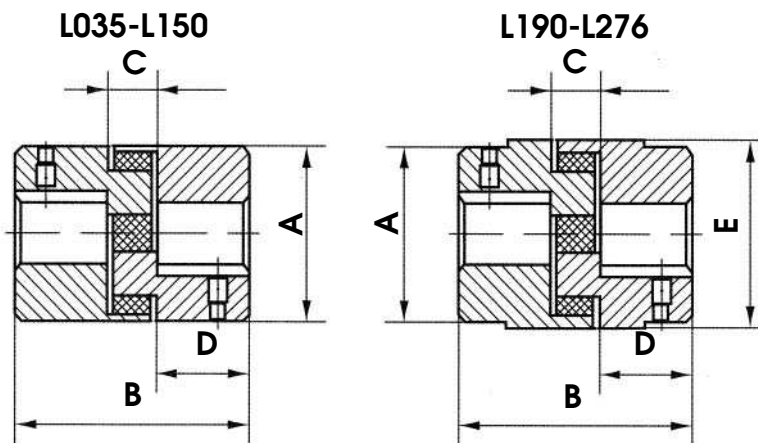

Part Number	Fundamental Dimensions					Torque Needed kgm	Rotational Speed r/om	Bore Size mm	Bore Max mm	Mass kg
	A	B	C	D	E					
KW	84	108	22	43	-	9.0	5.000	17	42	3.0
L110 16MM 5mm KW	84	108	22	43	-	9.0	5.000	18	42	3.0
L110 17MM 5mm KW	84	108	22	43	-	9.0	5.000	19	42	3.0
L110 18MM 6mm KW	84	108	22	43	-	9.0	5.000	19	42	3.0
L110 19MM N/KW	84	108	22	43	-	9.0	5.000	20	42	3.0
L110 19MM 6mm KW	84	108	22	43	-	9.0	5.000	22	42	3.0
L110 20MM 6mm KW	84	108	22	43	-	9.0	5.000	24	42	3.0
L110 22MM 6mm KW	84	108	22	43	-	9.0	5.000	25	42	3.0
L110 24MM 8mm KW	84	108	22	43	-	9.0	5.000	28	42	3.0
L110 25MM 8mm KW	84	108	22	43	-	9.0	5.000	30	42	3.0
L110 28MM 8mm KW	84	108	22	43	-	9.0	5.000	32	42	3.0
L110 30MM 8mm KW	84	108	22	43	-	9.0	5.000	35	42	3.0
L110 32MM 10mmKW	84	108	22	43	-	9.0	5.000	38	42	3.0
L110 35MM 10mmKW	84	108	22	43	-	9.0	5.000	40	42	3.0
L110 38MM 10mmKW	84	108	22	43	80	9.0	5.000	42	42	3.0
L110 40MM 12mmKW	96	115	25	45	80	15.0	5.000	16	48	5.0
L110 42MM 12mmKW	96	115	25	45	80	15.0	5.000	17	48	5.0
L150 16MM 5mm KW	96	115	25	45	80	15.0	5.000	19	48	5.0
L150 17MM 5mm KW	96	115	25	45	80	15.0	5.000	20	48	5.0
L150 19MM 6mm KW	96	115	25	45	80	15.0	5.000	22	48	5.0
L150 20MM 6mm KW	96	115	25	45	80	15.0	5.000	24	48	5.0
L150 22MM 6mm KW	96	115	25	45	80	15.0	5.000	25	48	5.0
L150 24MM 8mm KW	96	115	25	45	80	15.0	5.000	28	48	5.0
L150 25MM 8mm KW	96	115	25	45	80	15.0	5.000	28	48	5.0
L150 28MM N/KW	96	115	25	45	80	15.0	5.000	30	48	5.0
L150 28MM 8mm KW	96	115	25	45	80	15.0	5.000	32	48	5.0
L150 30MM 8mm KW	96	115	25	45	80	15.0	5.000	32	48	5.0
L150 32MM N/KW	96	115	25	45	80	15.0	5.000	35	48	5.0
L150 32MM 10mmKW	96	115	25	45	80	15.0	5.000	35	48	5.0
L150 35MM N/KW	96	115	25	45	80	15.0	5.000	38	48	5.0
L150 35MM 10mmKW	96	115	25	45	80	15.0	5.000	40	48	5.0
L150 38MM 10mmKW	96	115	25	45	80	15.0	5.000	42	48	5.0
L150 40MM 12mmKW	96	115	25	45	80	15.0	5.000	45	48	5.0
L150 42MM 12mmKW	96	115	25	45	80	15.0	5.000	48	48	5.0
L150 45MM 14mmKW	96	115	25	45	102	15.0	5.000	48	48	5.0
L150 48MM N/KW	115	134	25	54	102	20.0	5.000	19	54	7.6
L150 48MM 14mmKW	115	134	25	54	102	20.0	5.000	20	54	7.6
L190 19MM 6mm KW	115	134	25	54	102	20.0	5.000	24	54	7.6
L190 20MM 6mm KW	115	134	25	54	102	20.0	5.000	28	54	7.6
L190 24MM 8mm KW	115	134	25	54	102	20.0	5.000	28	54	7.6
L190 28MM N/KW	115	134	25	54	102	20.0	5.000	30	54	7.6
L190 28MM 8mm KW	115	134	25	54	102	20.0	5.000	32	54	7.6
L190 30MM 8mm KW	115	134	25	54	102	20.0	5.000	32	54	7.6
L190 32MM N/KW	115	134	25	54	102	20.0	5.000	35	54	7.6
L190 32MM 10mmKW	115	134	25	54	102	20.0	5.000	35	54	7.6
L190 35MM N/KW	115	134	25	54	102	20.0	5.000	38	54	7.6
L190 35MM 10mmKW	115	134	25	54	102	20.0	5.000	40	54	7.6
L190 38MM 10mmKW	115	134	25	54	102	20.0	5.000	42	54	7.6
L190 40MM 12mmKW	115	134	25	54	102	20.0	5.000	45	54	7.6
L190 42MM 12mmKW	115	134	25	54	102	20.0	5.000	48	54	7.6
L190 45MM 14mmKW	115	134	25	54	102	20.0	5.000	48	54	7.6
L190 48MM N/KW	115	134	25	54	102	20.0	5.000	50	54	7.6
L190 48MM 14mmKW	115	134	25	54	108	20.0	5.000	50	54	7.6
L190 50MM N/KW	127	154	26	64		30.0	4.200	30	67	9.0

Metric Type L Couplings

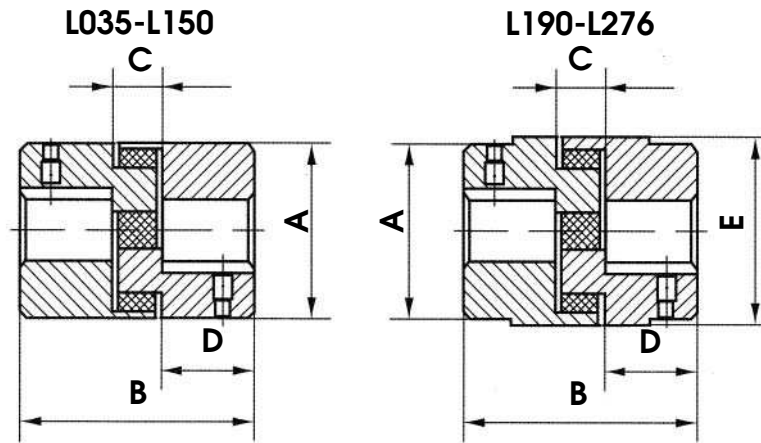



Part Number	Fundamental Dimensions					Torque Needed kgm	Rotational Speed r/om	Bore Size mm	Bore Max mm	Mass kg
	A	B	C	D	E					
L225 32MM N/KW	127	154	26	64	108	30.0	4.200	32	67	9.0
L225 32MM 10mmKW	127	154	26	64	108	30.0	4.200	32	67	9.0
L225 35MM N/KW	127	154	26	64	108	30.0	4.200	35	67	9.0
L225 35MM 10mmKW	127	154	26	64	108	30.0	4.200	35	67	9.0
L225 38MM 10mmKW	127	154	26	64	108	30.0	4.200	38	67	9.0
L225 40MM 12mmKW	127	154	26	64	108	30.0	4.200	40	67	9.0
L225 42MM 12mmKW	127	154	26	64	108	30.0	4.200	42	67	9.0
L225 45MM 14mmKW	127	154	26	64	108	30.0	4.200	45	67	9.0
L225 48MM 14mmKW	127	154	26	64	108	30.0	4.200	48	67	9.0
L225 50MM N/KW	127	154	26	64	108	30.0	4.200	50	67	9.0
L225 50MM 14mmKW	127	154	26	64	108	30.0	4.200	50	67	9.0
L225 55MM N/KW	127	154	26	64	108	30.0	4.200	55	67	9.0
L225 55MM 16mmKW	127	154	26	64	108	30.0	4.200	55	67	9.0
L225 60MM 18mmKW	127	154	26	64	108	30.0	4.200	60	67	9.0
L225 65MM 18mmKW	127	154	26	64	108	30.0	4.200	65	67	9.0

Note: Keyway dimensions conform to DIN 6885, JIS B 1310-1976, UNI 6604-1969, GB 1095-1979 standards.

Type L Coupling Rubber Sider

Part Number			
L035 L050 L070	L075 L090 L095	L150 L190 L225	

Inch Type L Couplings


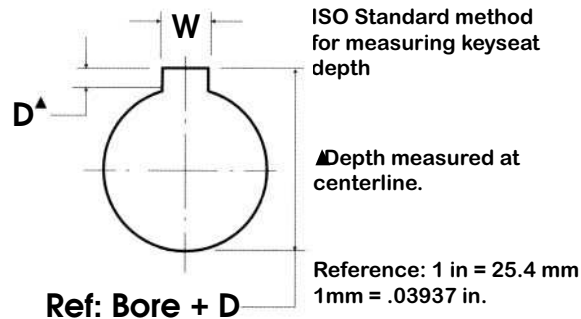
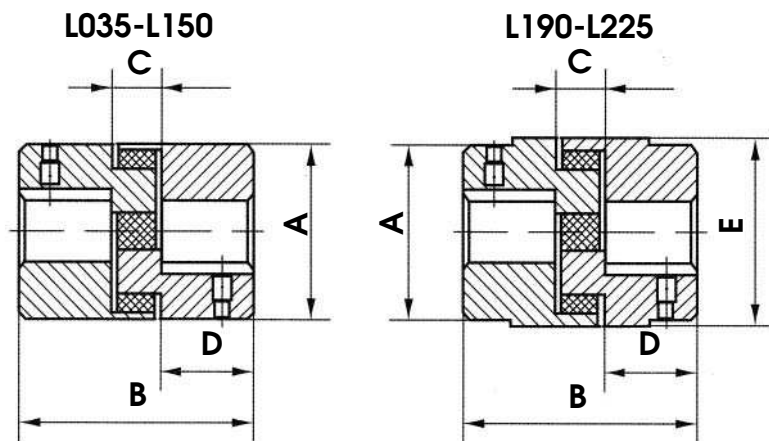


Part Number	Dimension The spro					wt - Lbs		Torque	Maximum	Bore
	A	B	C	D	E	Min Bore	Max Bore	In. - Lbs	RPM	
L035 1/8 N/KW	5/8	13/16	9/32	17/64	-	0.01	0.01	3.52	31000	1/8"
L035 3/16 N/KW	5/8	13/16	9/32	17/64	-	0.01	0.01	3.52	31000	3/16"
L035 1/4 N/KW	5/8	13/16	9/32	17/64	-	0.01	0.01	3.52	31000	1/4"
L035 5/16 N/KW	5/8	13/16	9/32	17/64	-	0.01	0.01	3.52	31000	5/16"
L035 3/8 N/KW	5/8	13/16	9/32	17/64	-	0.01	0.01	3.52	31000	3/8"
L050 1/4 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	1/4"
L050 5/16 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	5/16"
L050 3/8 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	3/8"
L050 3/8 3/32KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	3/8"
L050 3/8 1/8KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	3/8"
L050 7/16 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	7/16"
L050 7/16 3/32KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	7/16"
L050 1/2 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	1/2"
L050 1/2 1/8KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	1/2"
L050 9/16 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	9/16"
L050 9/16 1/8KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	9/16"
L050 5/8 N/KW	1 5/64	1 23/32	15/32	5/8	-	0.29	0.24	25.8	18000	5/8"
L070 1/4 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	1/4"
L070 5/16 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	5/16"
L070 3/8 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	3/8"
L070 3/8 3/32KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	3/8"
L070 3/8 1/8kw	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	3/8"
L070 7/16 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	7/16"
L070 7/16 3/32KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	7/16"
L070 1/2 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	1/2"
L070 1/2 1/8KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	1/2"
L070 1/2 3/16KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	1/2"
L070 9/16 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	9/16"
L070 5/8 N/KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	5/8"
L070 5/8 5/32KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	5/8"
L070 5/8 3/16KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	5/8"
L070 11/16 3/16KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	11/16"
L070 3/4 1/8KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	3/4"
L070 3/4 3/16KW	1 23/64	2	1/2	3/4	-	0.59	0.54	44.1	14000	3/4"
L075 1/4 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	1/4"
L075 1/4 1/8KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	1/4"
L075 5/16 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	5/16"
L075 3/8 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	3/8"
L075 3/8 3/32KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	3/8"
L075 3/8 1/8KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	3/8"
L075 7/16 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	7/16"
L075 7/16 3/32KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	7/16"
L075 7/16 1/8KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	7/16"
L075 1/2 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	1/2"
L075 1/2 1/8KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	1/2"
L075 9/16 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	9/16"
L075 9/16 1/8kw	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	9/16"
L075 5/8 N/KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	5/8"
L075 5/8 1/8KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	5/8"
L075 5/8 5/32KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	5/8"
L075 5/8 3/16KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	5/8"
L075 11/16 3/16KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	11/16"
L075 3/4 1/8KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	3/4"
L075 3/4 3/16KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	3/4"
L075 13/16 3/16KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	13/16"

Inch Type L Couplings

L035-L150

L190-L225

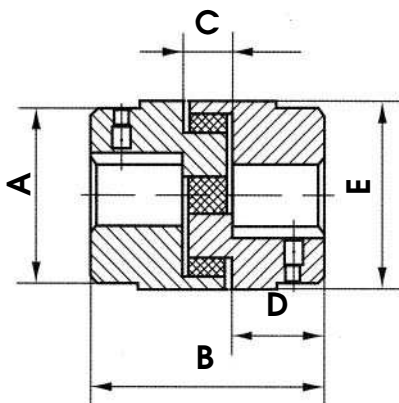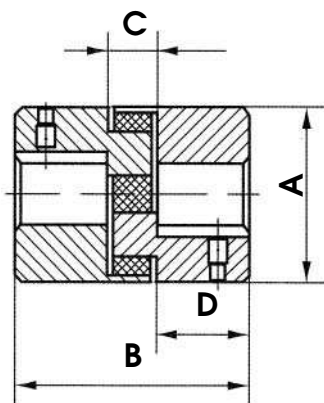

ISO Standard method
for measuring keyseat
depth

▲Depth measured at
centerline.

Reference: 1 in = 25.4 mm
1mm = .03937 in.

Part Number	Dimension The spro					wt - Lbs		Torque	Maximum	Bore
	A	B	C	D	E	Min Bore	Max Bore	In. - Lbs	RPM	
L075 7/8 3/16KW	1 3/4	2 1/8	1/2	3/4	-	1.00	0.86	88.2	11000	7/8"
L090 1/4 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	1/4"
L090 5/16 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	5/16"
L090 3/8 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	3/8"
L090 3/8 3/32KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	3/8"
L090 3/8 1/8KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	3/8"
L090 7/16 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	7/16"
L090 7/16 3/32KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	7/16"
L090 7/16 1/8KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	7/16"
L090 1/2 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	1/2"
L090 1/2 1/8KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	1/2"
L090 9/16 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	9/16"
L090 9/16 1/8KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	9/16"
L090 5/8 5/32KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	5/8"
L090 5/8 3/16KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	5/8"
L090 11/16 3/16KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	11/16"
L090 3/4 N/KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	3/4"
L090 3/4 1/8KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	3/4"
L090 3/4 3/16KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	3/4"
L090 13/16 3/16KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	13/16"
L090 7/8 3/16KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	7/8"
L090 7/8 1/4KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	7/8"
L090 15/16 1/4KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	15/16"
L090 1" 3/16KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	1"
L090 1" 1/4KW	2 7/64	2 1/8	1/2	13/16	-	1.48	1.32	145	9000	1"
L095 7/16 N/KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	7/16"
L095 7/16 3/32KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	7/16"
L095 7/16 1/8KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	7/16"
L095 1/2 N/KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	1/2"
L095 1/2 1/8KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	1/2"
L095 9/16 N/KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	9/16"
L095 9/16 1/8KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	9/16"
L095 5/8 N/KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	5/8"
L095 5/8 5/32KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	5/8"
L095 5/8 3/16KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	5/8"
L095 11/16 3/16KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	11/16"
L095 3/4 1/8KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	3/4"
L095 3/4 3/16KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	3/4"
L095 13/16 3/16KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	13/16"
L095 7/8 3/16KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	7/8"
L095 7/8 1/4KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	7/8"
L095 15/16 1/4KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	15/16"
L095 1" 3/16KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	1"
L095 1" 1/4KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	1"
L095 1-1/16" 1/4KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	1-1/16"
L095 1-1/8" 1/4KW	2 7/64	2 1/2	1/2	1	-	1.75	1.52	189	9000	1-1/8"
L099 7/16 N/KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	7/16"
L099 7/16 3/32KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	7/16"
L099 7/16 1/8KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	7/16"
L099 1/2 N/KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1/2"
L099 1/2 1/8KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1/2"
L099 9/16 N/KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	9/16"
L099 9/16 1/8KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	9/16"
L099 5/8 N/KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	5/8"
L099 5/8 5/32KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	5/8"




American Metric® Corporation

GROUP: 078



1-078-050106

Inch Type L Couplings

L035-L150

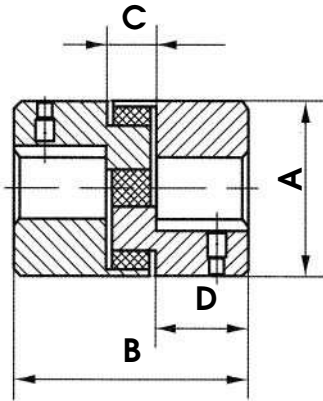

L190-L225

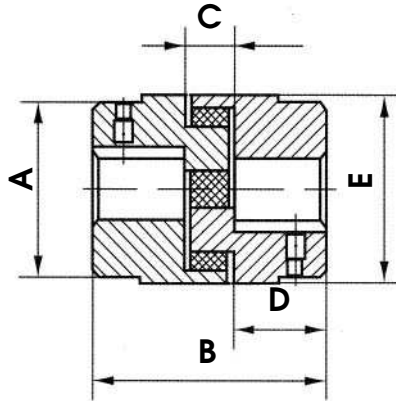

ISO Standard method
for measuring keyseat
depth

▲Depth measured at
centerline.

Reference: 1 in = 25.4 mm
1mm = .03937 in.

Part Number	Dimension The spro					wt - Lbs		Torque	Maximum	Bore
	A	B	C	D	E	Min Bore	Max Bore	In. - Lbs	RPM	
L099 5/8 3/16kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	5/8"
L099 11/16 3/16kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	11/16"
L099 3/4 N/KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	3/4"
L099 3/4 1/8kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	3/4"
L099 3/4 3/16kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	3/4"
L099 13/16 3/16kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	13/16"
L099 7/8 N/KW	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	7/8"
L099 7/8 3/16kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	7/8"
L099 7/8 1/4kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	7/8"
L099 15/16 1/4kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	15/16"
L099 1" 3/16kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1"
L099 1" 1/4kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1"
L099 1-1/16" 1/4kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1-1/16"
L099 1-1/8" 1/4kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1-1/8"
L099 1-3/16" 1/4kw	2 17/32	2 1/2	3/4	1 1/16	-	2.50	2.17	315	7000	1-3/16"
L100 7/16 N/KW	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	7/16"
L100 7/16 3/32kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	7/16"
L100 7/16 1/8kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	7/16"
L100 1/2 N/KW	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1/2"
L100 1/2 1/8kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1/2"
L100 9/16 N/KW	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	9/16"
L100 9/16 1/8kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	9/16"
L100 5/8 5/32kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	5/8"
L100 5/8 3/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	5/8"
L100 11/16 3/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	11/16"
L100 3/4 N/KW	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	3/4"
L100 3/4 1/8kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	3/4"
L100 3/4 3/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	3/4"
L100 13/16 3/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	13/16"
L100 7/8 3/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	7/8"
L100 7/8 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	7/8"
L100 15/16 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	15/16"
L100 1" 3/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1"
L100 1" 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1"
L100 1-1/16" 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-1/16"
L100 1-1/8" 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-1/8"
L100 1-3/16" 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-3/16"
L100 1-1/4" 1/4kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-1/4"
L100 1-1/4" 5/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-1/4"
L100 1-5/16" 5/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-5/16"
L100 1-3/8" 5/16kw	2 17/32	3 1/2	3/4	1 3/8	-	3.42	2.92	415	7000	1-3/8"
L110 5/8 N/KW	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	5/8"
L110 5/8 5/32kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	5/8"
L110 5/8 3/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	5/8"
L110 11/16 3/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	11/16"
L110 3/4 1/8kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	3/4"
L110 3/4 3/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	3/4"
L110 13/16 3/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	13/16"
L110 7/8 3/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	7/8"
L110 7/8 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	7/8"
L110 15/16 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	15/16"
L110 1" 3/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1"
L110 1" 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1"
L110 1-1/16" 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-1/16"
L110 1-1/8" 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-1/8"






American Metric® Corporation

Inch Type L Couplings

L035-L150

L190-L225

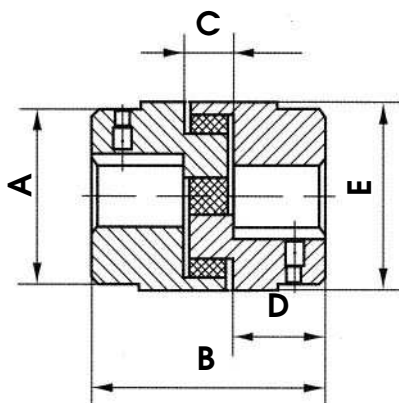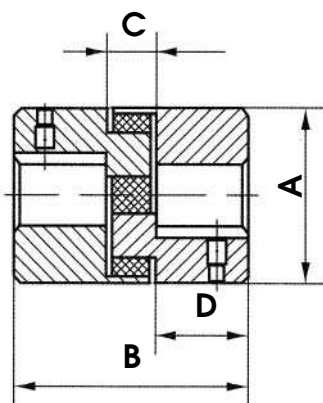

ISO Standard method
for measuring keyseat
depth

Depth measured at
centerline.

Reference: 1 in = 25.4 mm
1mm = .03937 in.

Ref: Bore + D

Part Number	Dimension The spro					wt - Lbs		Torque	Maximum	Bore
	A	B	C	D	E	Min Bore	Max Bore	In. - Lbs	RPM	
L110 1-3/16" 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-3/16"
L110 1-1/4" 1/4kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-1/4"
L110 1-1/4" 5/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-1/4"
L110 1-5/16" 5/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-5/16"
L110 1-3/8" 5/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-3/8"
L110 1-3/8" 3/8kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-3/8"
L110 1-7/16" 3/8kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-7/16"
L110 1-1/2" 5/16kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-1/2"
L110 1-1/2" 3/8kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-1/2"
L110 1-9/16" 3/8kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-9/16"
L110 1-5/8" 3/8kw	3 5/16	4 1/4	7/8	1 11/16	-	6.45	5.61	788	5000	1-5/8"
L150 5/8 N/KW	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	5/8"
L150 5/8 5/32kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	5/8"
L150 5/8 3/16 kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	5/8"
L150 3/4 3/16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	3/4"
L150 7/8 3/16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	7/8"
L150 7/8 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	7/8"
L150 15/16 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	15/16"
L150 1" 3/16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1"
L150 1" 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1"
L150 1-1/16" 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-1/16"
L150 1-1/8" 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-1/8"
L150 1-3/16" 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-3/16"
L150 1-1/4" 1/4kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-1/4"
L150 1-1/4" 5/16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-1/4"
L150 1-5/16" 5-16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-5/16"
L150 1-3/8" 5/16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-3/8"
L150 1-3/8" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-3/8"
L150 1-7/16" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-7/16"
L150 1-1/2" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-1/2"
L150 1-9/16" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-9/16"
L150 1-5/8" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-5/8"
L150 1-11/16" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-11/16"
L150 1-3/4" 3/8kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-3/4"
L150 1-3/4" 7/16kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-3/4"
L150 1-13/16" 1/2kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-13/16"
L150 1-7/8" 1/2kw	3 3/4	4 1/2	1	1 3/4	-	8.95	7.73	1260	5000	1-7/8"
L190 3/4 N/KW	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	3/4"
L190 3/4 3/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	3/4"
L190 13/16 3/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	13/16"
L190 7/8 3/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	7/8"
L190 7/8 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	7/8"
L190 15/16 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	15/16"
L190 1" 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1"
L190 1-1/16" 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-1/16"
L190 1-1/8" 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-1/8"
L190 1-3/16" 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-3/16"
L190 1-1/4" 1/4kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-1/4"
L190 1-1/4" 5/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-1/4"
L190 1-5/16" 5/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-5/16"
L190 1-3/8" 5/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-3/8"
L190 1-3/8" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-3/8"
L190 1-7/16" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-7/16"
L190 1-1/2" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-1/2"
L190 1-9/16" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-9/16"




American Metric® Corporation

GROUP: 078



1-078-

Inch Type L Couplings

L035-L150

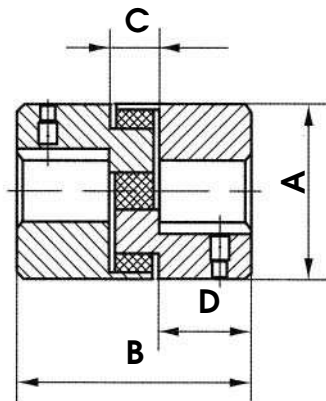

L190-L225

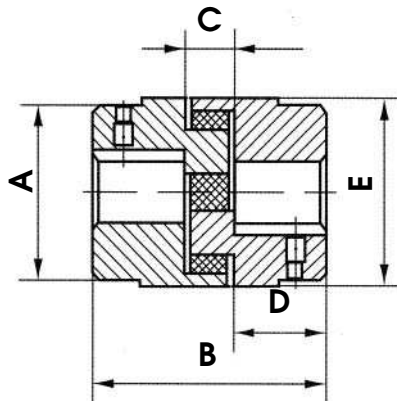

ISO Standard method
for measuring keyseat
depth

▲Depth measured at
centerline.

Reference: 1 in = 25.4 mm
1mm = .03937 in.

Ref: Bore + D

Part Number	Dimension The spro					wt - Lbs		Torque	Maximum	Bore
	A	B	C	D	E	Min Bore	Max Bore	In. - Lbs	RPM	
L190 1-5/8" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-5/8"
L190 1-11/16" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-11/16"
L190 1-3/4" 3/8kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-3/4"
L190 1-3/4" 7/16kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-3/4"
L190 1-13/16"	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-13/16"
1/2kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-7/8"
L190 1-7/8" 1/2kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	1-15/16"
L190 1-15/16"	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	2"
1/2kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	2-1/16"
L190 2" 1/2kw	4	5 1/4	1	2 1/8	4 1/2	8.83	7.04	1702	5000	2-1/8"
L190 2-1/16" 1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	3/4"
L190 2-1/8" 1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	3/4"
L225 3/4 N/KW	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	13/16"
L225 3/4 3/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	7/8"
L225 13/16 3/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	7/8"
L225 7/8 3/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	15/16"
L225 7/8 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1"
L225 15/16 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1"
L225 1" 3/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-1/16"
L225 1" 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-1/8"
L225 1-1/16" 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-3/16"
L225 1-1/8" 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-1/4"
L225 1-3/16" 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-1/4"
L225 1-1/4" 1/4kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-5/16"
L225 1-1/4" 5/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-3/8"
L225 1-5/16"	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-3/8"
5/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-7/16"
L225 1-3/8" 5/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-1/2"
L225 1-3/8" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-1/2"
L225 1-7/16" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-9/16"
L225 1-1/2" 5/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-5/8"
L225 1-1/2" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-11/16"
L225 1-9/16" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-3/4"
L225 1-5/8" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-3/4"
L225 1-11/16" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-13/16"
L225 1-3/4" 3/8kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-7/8"
L225 1-3/4" 7/16kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	1-15/16"
L225 1-13/16"	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2"
1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-1/16"
L225 1-7/8" 1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-1/8"
L225 1-15/16"	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-3/16"
1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-1/4"
L225 2" 1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-3/8"
L225 2-1/16" 1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-1/2"
L225 2-1/8" 1/2kw	4 1/4	6	1	2 1/2	5	12.28	9.60	2332	4000	2-5/8"

Note: Keyway dimensions conform to DIN 6885, JIS B 1310-1976, UNI 6604-1969, USAS B 17.1-1967, GB 1095-1979 standards.

Type L Coupling Rubber Sider

Part Number			
L035	L075	L150	
L050	L090	L190	
L070	L095	L225	



American Metric® Corporation