


Metric High Performance Chain

Best Value Chain we offer


(Replaces Standard Chain for only A Slight Increase in cost
But significant improvements in strength and ware)



Average Breaking Load - 12B-1

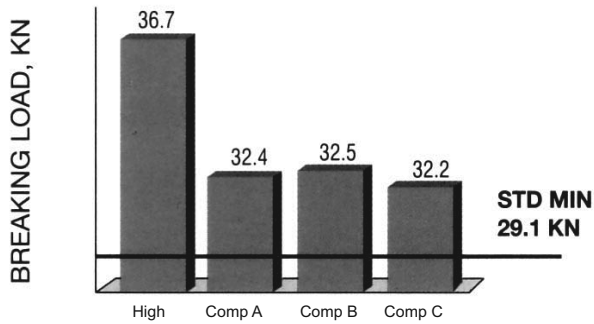

Wear Life 08B-1

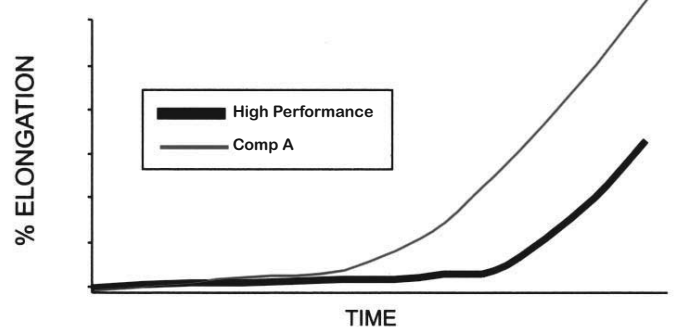

These High Performance chains have been specially developed for client applications that require exceptional strength and endurance. Inspiration in the detail of the plates, pins, bushes, and rollers, manufacture to close tolerance and assembly with care. This is what makes these chains tougher than the rest.

ISO Number	Ametric® Part Number	Pitch	Width between Inner Plates (Min.)	Roller Dia. (Max.)	Plate Height (Max.)	Width Over Bearing Pin (Max.)	Bearing Pin Dia. (Max.)	Tensile Strength (KN) (Min.)	Tensile Strength (KN) (Avg.)	Allowable Load (KN) (Max.)
08B-1	42 HP	12.70	7.75	8.51	11.81	17.00	4.45	20.79	22.66	4.5
10B-1	52 HP	15.875	9.65	10.16	14.73	21.80	5.08	27.65	29.87	5.6
12B-1	62 HP	19.05	11.68	12.07	16.13	22.70	5.72	33.34	36.69	7.25
16B-1	82 HP	25.40	17.02	15.88	21.08	36.10	8.27	73.55	78.48	15
20B-1	102 HP	31.75	19.56	19.05	26.42	43.20	10.19	110.82	116.74	23.75

Models also available in double and triple strands
Also available in ANSI Chain



American Metric® Corporation

Group: 005

1-005-060306