


# Side-bow Chain

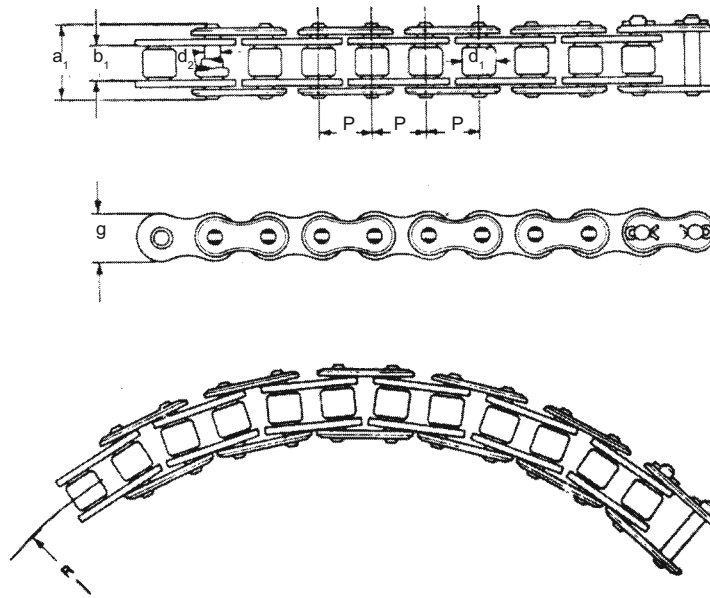

| Chain No. | ISO No. | Pitch P | Between Inner Plates $b_1$ | Roller Diameter $d_1$ | Pin Diameter $d_2$ | Height g | Overall Chain Width $a_1$ | Radius R | Breaking Strength N | Weight kg/m |
|-----------|---------|---------|----------------------------|-----------------------|--------------------|----------|---------------------------|----------|---------------------|-------------|
| 42 SB     | 08B     | 12.7    | 7.75                       | 8.51                  | 3.94               | 11.8     | 17.0                      | 360      | 11,200              | 0.71        |
| 52 SB     | 10B     | 15.875  | 9.65                       | 10.16                 | 4.45               | 14.7     | 19.6                      | 410      | 15,000              | 0.92        |
| 62 SB     | 12B     | 19.05   | 11.68                      | 12.07                 | 5.08               | 16.1     | 22.7                      | 510      | 20,000              | 1.20        |